JUNE 1, 1918

NOTICE TO READER—When you finish reading this magazine place a one-cent stamp on this notice, mail the magazine and it will be placed in the hands of our soldiers or sailors destined to proceed overseas. No wrapping—no address.

AVIATION AND AERONAUTICAL ENGINEERING

RECEIVED APR 1951

Kyprie Photo Service — Italian Air Patrol in a Gathering Storm

VOLUME IV
Number 9

PRICE
Fifteen
Cents

SPECIAL FEATURES

AIR PROPULSION

THE FRIEDRICHSHAFEN BOMBING BIPLANE

THE ELECTRIC DYNAMOMETER

THE S. E. 5A PURSUIT BIPLANE

THE 1917 FOKKER TRIPLANE

PUBLISHED SEMI-MONTHLY
BY
THE GARDNER-MOFFAT CO., Inc.
120 W. 32nd ST. NEW YORK

AIRCRAFT

MARTIN
U.S.A.

TRADE MARK

THE entire organization and skill, experience and ability of this company are devoted to intensive production in the interests of the United States for the period of the war.

WHEN peace comes Martin commercial and pleasure airplanes will maintain the supremacy of performance and dependability which they have held since 1909.

THE GLENN L. MARTIN COMPANY

CLEVELAND, OHIO

Contractors to the United States Government

New American Endurance Run Established

On April 12th, the Loughead Seaplane F-1 established a new American duration record. This seaplane, the largest ever constructed on the Pacific Coast, made the trip, with a pilot and three passengers, from Santa Barbara to San Diego, a distance of 211 miles, in 181 minutes.

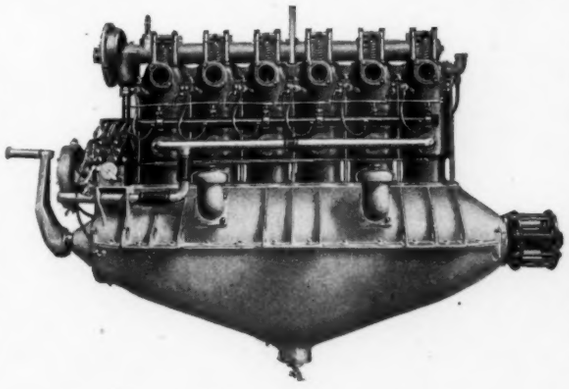

The F-1 is designed for aerial patrol and is motored by two Six Cylinder *Hall-Scott* A-5 150 *h.p.* Airplane Engines.

Catalog on Request

HALL-SCOTT MOTOR CAR COMPANY

General Offices: CROCKER BUILDING SAN FRANCISCO, CALIFORNIA

HALL-SCOTT

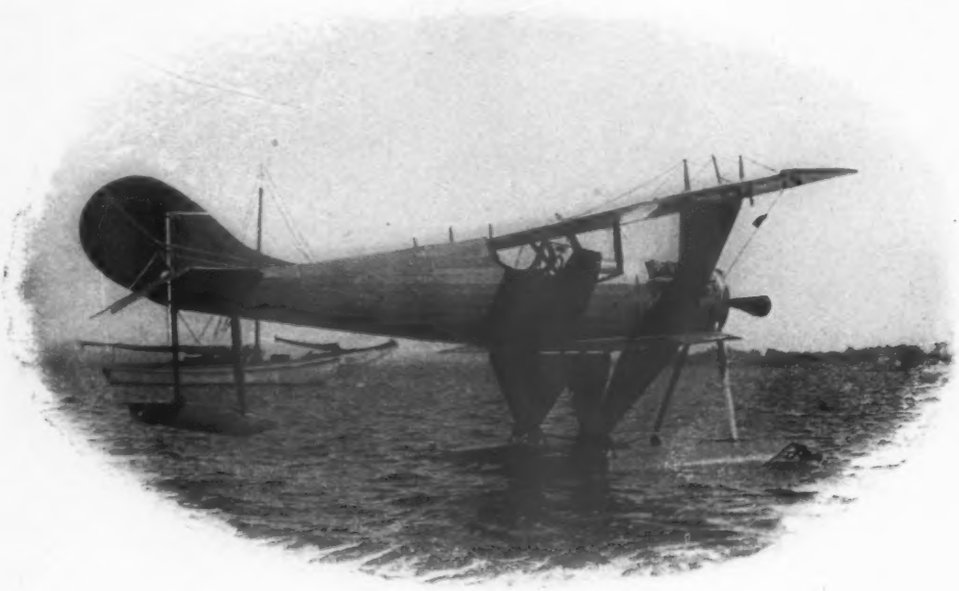

CONTRACTORS TO

The United States Army and Navy

The British Admiralty

THE BURGESS COMPANY

MARBLEHEAD, MASS.

Sole Licensees for the United States for the Dunne Patents

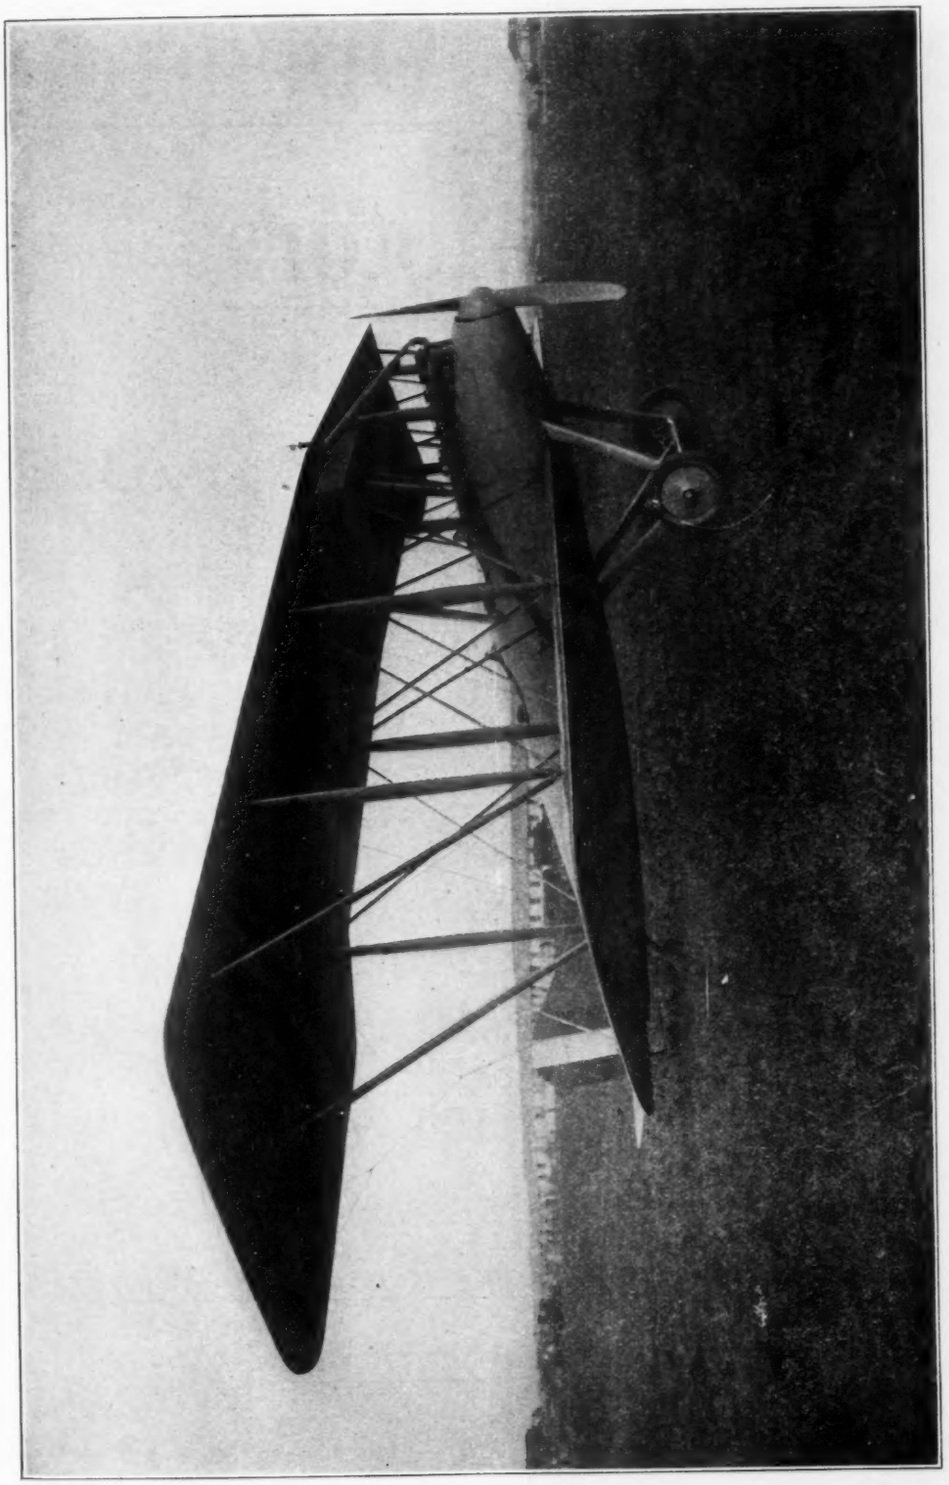

·L·W·F·ENGINEERING·COMPANY·
COLLEGE POINT, N. Y.

Remarkable Opportunity In Motors

WE HAVE FOR SALE

2 Brand new Hall-Scott A 5a "Big Six" Navy Inspected Motors, 135-150 HP.

3 Slightly used, but in perfect condition, Hall-Scott A 5 Motors, 125-135 HP.

1 Two-place complete Seaplane, twin float A 7, 90-100 HP, Hall-Scott Motor. Speed 70 miles per hour, especially constructed for schooling purposes, and equipped with Dep. Control.

The Above at Very Reasonable Prices

Write for Particulars

BOEING AIRPLANE COMPANY

SEATTLE, WASHINGTON

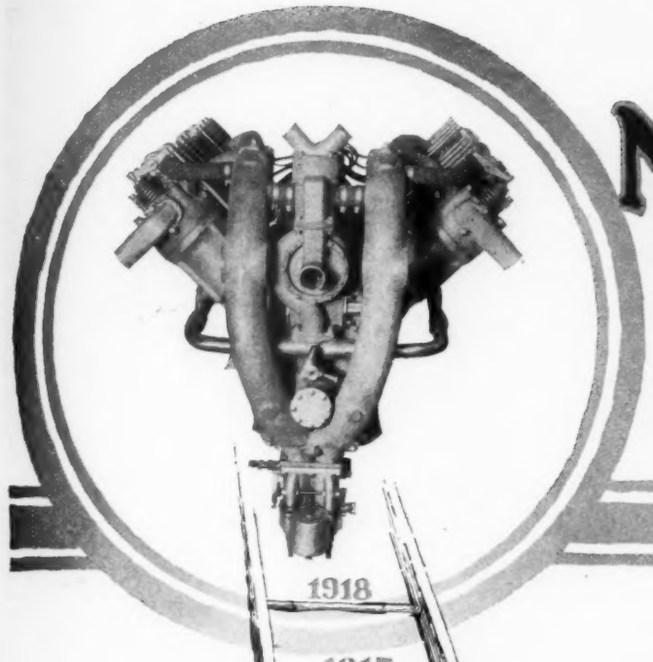

Mounting the Ladder of Experience

The Sturtevant

Airplane Engine embodying the experience gained through nine years of progressive development stands unchallenged; the foremost American Engine.

Model 5A-4½ 8 Cylinder
210 Horsepower
2.3 lbs. per B.H.P.

B. F. Sturtevant Company
Hyde Park · Boston · Massachusetts
Members Aircraft Manufacturers Association

BOYCE MOTO METER

REDUCING THE HAZARDS OF FLYING

Guessing at the condition of Aircraft Motors thousands of feet in the air is dangerous—foolhardy. It can very easily prove fatal. Airmen understand the vital importance of the *factor of safety*, and they find the Boyce Moto-meter indispensable. If the motor is getting cold—as it often does at the great altitudes now so common in war flying—the Boyce Moto-meter gives ample warning before trouble comes. It is the *only* moto-meter registering from *freezing to boiling*. That's worth remembering!

Even at 25,000 feet altitude, the Boyce Moto-meter registers with absolute accuracy. *No other moto-meter can do this.* The pointer keeps steady and true under the most severe vibration—another exclusive Boyce feature. Its weight, with 12 feet of tubing, is only 12 ounces.

Every airman who uses it will tell you that the Boyce Moto-meter immeasurably reduces the hazards of flying. It's a *necessity* in the air!

THE MOTO-METER CO., Inc.
LONG ISLAND CITY, N. Y., U. S. A.

ERIE STANDARD
AIRCRAFT METAL PARTS

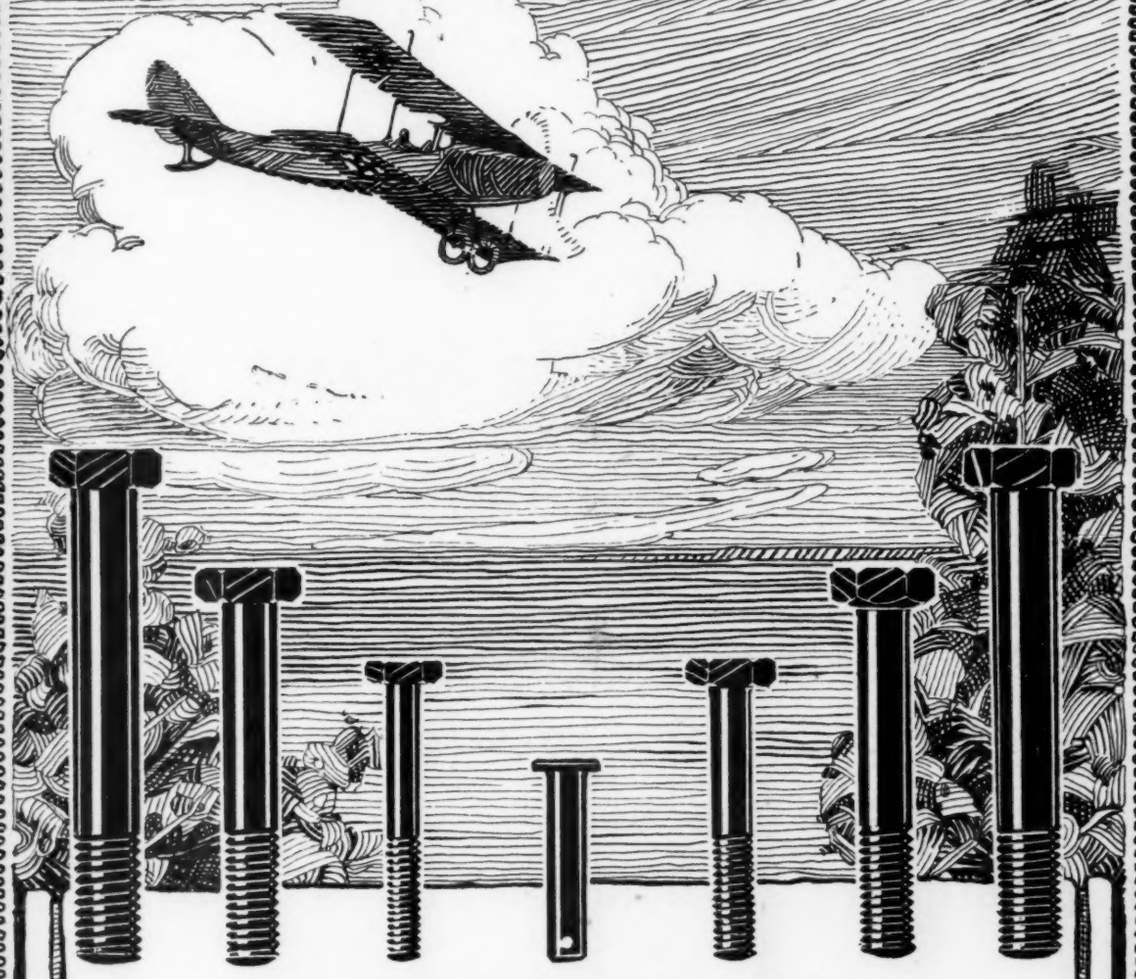

A DEPENDABLE SOURCE

Our plant at Erie—the largest of its kind—manufactures solely AIRCRAFT BOLTS, NUTS and CLEVIS PINS.

A large representative stock, conforming to Government specifications, is available for immediate use and delivery.

Our catalogue of AIRCRAFT BOLTS, NUTS and CLEVIS PINS is ready for distribution. Request our New York Office to send you a copy.

ERIE SPECIALTY COMPANY
8 West 40th Street, New York City
Main Plant, Erie, Pa.

Announcing

the lightest, smallest and most powerful Storage Battery of its weight and capacity ever produced.

The Multiple Special Aviation Battery

gives one source of electrical energy of sufficent capacity to supply and co-ordinate all the necessary electrical apparatus for aeronautical use.

Correspondence Invited

Multiple Storage Battery Co.
427 W. 50th Street - New York City

It Shall

1. Protect wood
2. Protect doped linen
3. Protect doped cotton
4. Protect metal
5. Be long oil varnish
6. Resist air
7. Resist light
8. Resist water
9. Resist natural gas
10. Resist illuminating gas
11. Have proper brushing qualities
12. Have proper flowing qualities
13. Have proper covering qualities
14. Have suitable body
15. Dry dust free rapidly
16. Harden rapidly
17. Be elastic
18. Be clear
19. Be transparent
20. Be highest quality
21. Match a fixed color solution
22. Be durable
23. Not flash below 95 degrees Fahr.
24. Not whiten under water
25. Not dull under water
26. Not show defects under water
27. Stand air test during application
28. Stand air test during drying
29. Meet a fixed setting test
30. Meet a threefold drying test
31. Meet a severe bending test
32. Be inspected before shipment
33. Be inspected at destination
34. Prove durable under fixed test

THE stiffest specifications ever put up for a single grade of varnish are presented briefly in the column to the right.

Our Air-Plane Rexpar meets all these conditions and is specified and purchased by the United States Government, for general use in airplane work.

Our first order was for 16 car loads—the largest individual order for any type or make of varnish ever placed.

This order is a double compliment to Sherwin-Williams because it concedes our technical resources for achieving the most remarkable combination of qualities ever realized in one grade of varnish, and also our production capacity for turning out an emergency order of unprecedented volume.

Covering all the 34 "shalls" of the Signal Corps specifications, the Government inspectors are placing the seal shown at the top of this column, and that seal on Air-Plane Rexpar means

It Does

AIR-PLANE
REXPAR

Send for booklet "War Paints and Varnishes" and sample of "Air-Plane Rexpar"

The Sherwin-Williams Company
War Sales Dept., 601 Canal Rd., Cleveland, O.

SHERWIN-WILLIAMS
PRODUCTS

NEW ENDURANCE RECORD

Established by

Union Airplane Motor at U. S. Aeronautical Testing Laboratory, Navy Yard, Washington, D. C.

Best previous record exceeded by fifty per cent.

UNION GAS ENGINE COMPANY

ESTABLISHED 1885

OAKLAND - - - CALIFORNIA

Full Power

THAT instant response to the demand for more engine power which means so much when flattening out for a difficult landing depends upon the quality of the engine details.

The aeroplane parts made by The Steel Products Co. are as good as careful design, skilled workmen and searching inspection can make them.

Every valve, turnbuckle, tappet and bolt is made with the full realization that a life may depend upon its accuracy and strength.

SP

A DEPARTMENT
OF YOUR PLANT

for

Valves
Propeller Hub Bolts
Push Rods
Turnbuckles

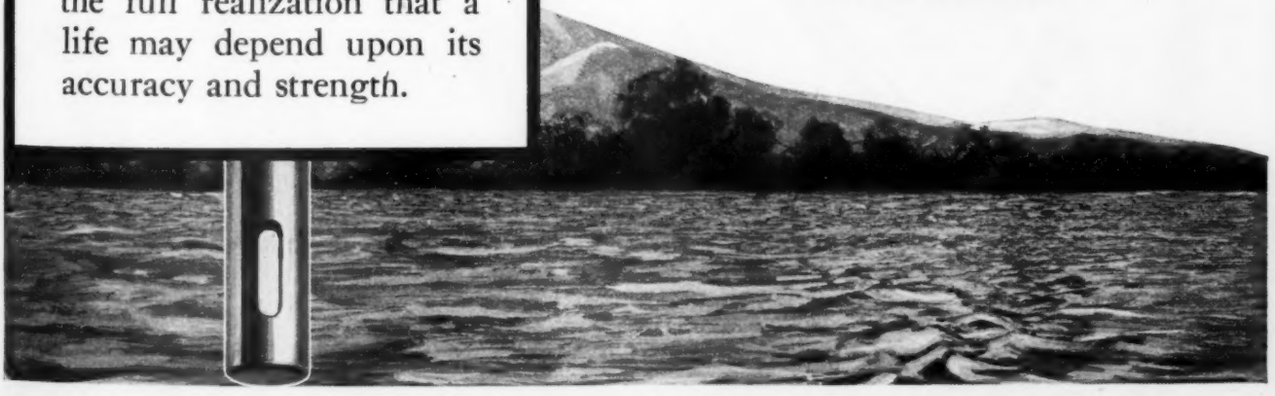

The Steel Products Co.

Michigan Plant
Detroit, Mich.

Main Plant
Cleveland, Ohio

Metals Welding Plant
Cleveland, Ohio

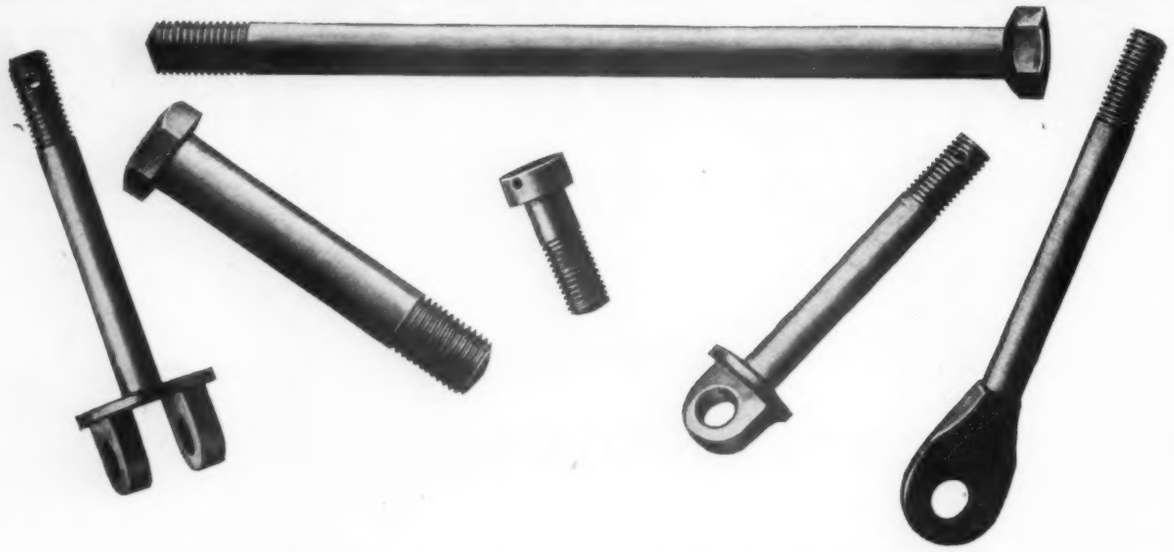

The parts shown on this page are used in AEROPLANE CONSTRUCTION. All being manufactured on AUTOMATIC MACHINES from our COLD DRAWN 3½% NCKEL STEEL. When you desire

3½% NICKEL STEEL

which will be uniform in quality, write or wire

SALES OFFICES
1001 Ford Bldg., Detroit, Mich.
801 Conover Bldg., Dayton, Ohio
617 Merchants Bank Building, Indianapolis, Indiana

The Betz-Pierce Co.
"STEEL OF QUALITY"
2230-40 East Ninth Street, Cleveland

SALES OFFICES
1308-9 Park Bldg.
Pittsburgh, Pennsylvania
591 Ellicott Square Bldg.
Buffalo, New York

A WELL ASSORTED STOCK OF BARS CARRIED IN CLEVELAND

"There doubtless are other good bearing bronzes, but I know Non-Gran is good and I know Non-Gran is uniform!"

THE man and engineer who spoke those words is known to every Automotive Engineer, not only of this Country, but of the entire world. You know him, as does everyone else, as easily one of the first five Automotive Engineers of America. In those few words hasn't this man expressed the majority opinion of the entire American Automotive Industry?

HIGH SPEED
NON-GRAN
BEARING BRONZE

American Bronze Corporation
Berwyn Pennsylvania

THE
J. G. WHITE COMPANIES

FINANCE industrial enterprises. Also assist in the reorganization or consolidation of existing properties, or in the financing of extensions and improvements.

Perform engineering and construction work of every description in connection with industrial plants. We are also prepared to make expert investigations and reports on going properties, with recommendations concerning possible improvements or extensions to increase operating efficiency.

Take charge of the complete operation of industrial properties for clients.

43 Exchange Place, New York

LONDON CHICAGO

DU PONT AMERICAN INDUSTRIES

DU PONT

CHEMICAL PRODUCTS
for Factory *and* Laboratory

Du Pont chemicals and chemical products are known Nation-wide for their dependability. The first essential in chemical manufacture is to understand the uses to which a chemical is to be put. The next step is to produce the best possible chemical for the purpose. On this concrete formula rests the success of the Du Pont Line.

DU PONT

Mark X before subject that interests you and MAIL this coupon to
E. I. du Pont de Nemours & Co.,
Advertising Division
Wilmington (Av) Delaware

Acetic Ether
Amyl Acetate
Aniline Oil
Bronzing Liquids
Carpo Paint
Collodion
Dark Creosote
Dead Oil
Dimethyaniline
Dinitrophenol
Ether, U. S. P. 1910 and Anesthesia
Ethyl Acetate
Flotation Oils
Iso Amyl Acetate C. P.
Iso Amyl Alcohol C. P.
Wood and Metal Lacquers
Leather Renovators
Leather Substitute Solutions
Mantle Dips
Napthalene
Nitre Cake
Nitrobenzol
Parlodion
Patent and Split Leather Solutions
Pegamoid Aluminum Paint
Pitch
PONTAR—A Road Making Material
PONTOKLENE—For Cleaning Autos
PY-RA-LIN Enamels for Wood and Metal
Refined Aceton Oil
Refined Creosote
Refined Fusel Oil
Salicylic Acid
Shingle Oil
Sodium Acetate
Solvent Naphtha
Solvent Thinners
Special Pyroxylin Solutions
Waterproof Cement
Wood Preservatives

Name.....
Address.....
City.....
State.....
Name of your Concern
.....
Business.....

We Aim to Serve

our customers intelligently by thoroughly understanding their needs. For this purpose we maintain a staff of experts who are at the disposal of our trade, present or prospective, in solving any problems connected with the use of our materials.

We Maintain Quality

by expert supervision, complete laboratory control over factory operations, perfection in technical skill, the best in raw materials and ample factory facilities.

The amalgamation of Du Pont and Harrison interests enables us to assure maximum satisfaction, both in product and service, to those manufacturers and other users of chemicals whose requirements are dependability, responsibility, and adequate supply.

We Invite Correspondence

from manufacturers, engineers and those requiring chemicals and mixtures for specific purposes. Check the coupon and mail it. We will be glad to send full information.

Du Pont Chemical Works
Equitable Bldg., NEW YORK

HARRISON WORKS
Philadelphia, Pa.

Owned and operated by
E. I. du Pont de Nemours & Co.

H

Mark X before subject that interests you and MAIL this coupon to
E. I. du Pont de Nemours & Co.,
Advertising Division
Wilmington (Av) Delaware

ACIDS
Acetic
Aqua Fortis
Dipping
Electrolyte
Lactic 22% Dark, 22% and 44% Light
Lactic, U. S. P.—9th Decennial Edition
Muriatic
Nitric
Oil of Vitriol
Oleum
Sulphuric

ALUMS
Crystal Potash, U. S. P.
Crystal Ammonia, U. S. P.
Filter (22% Al_2O_3). (For use in any make of Mechanical Filter)
Pearl
Pickle
Porous
Sizing—For Paper Makers
Sulphate of Alumina. (In all the commercial grades and strengths)

PIGMENTS
White Lead (Dry and in Oil)
Red Lead (84% Pb_3O_4, also 94% U. S. Government Standard)
Litharge
Barium Chloride
Blanc Fixe
Hydrate of Alumina
Flake White
Lithopone (Beckton White)
Rubber Makers White, Chemical Dry and Pulp Colors

MISCELLANEOUS CHEMICALS
Barium Nitrate
Bichromate of Soda
Distilled Water
Nitrate of Soda
Salt Cake
Strontium Nitrate
Strontium Carbonate

Name.....
Address.....
City.....
State.....
Name of your Concern
.....
Business.....

DU PONT

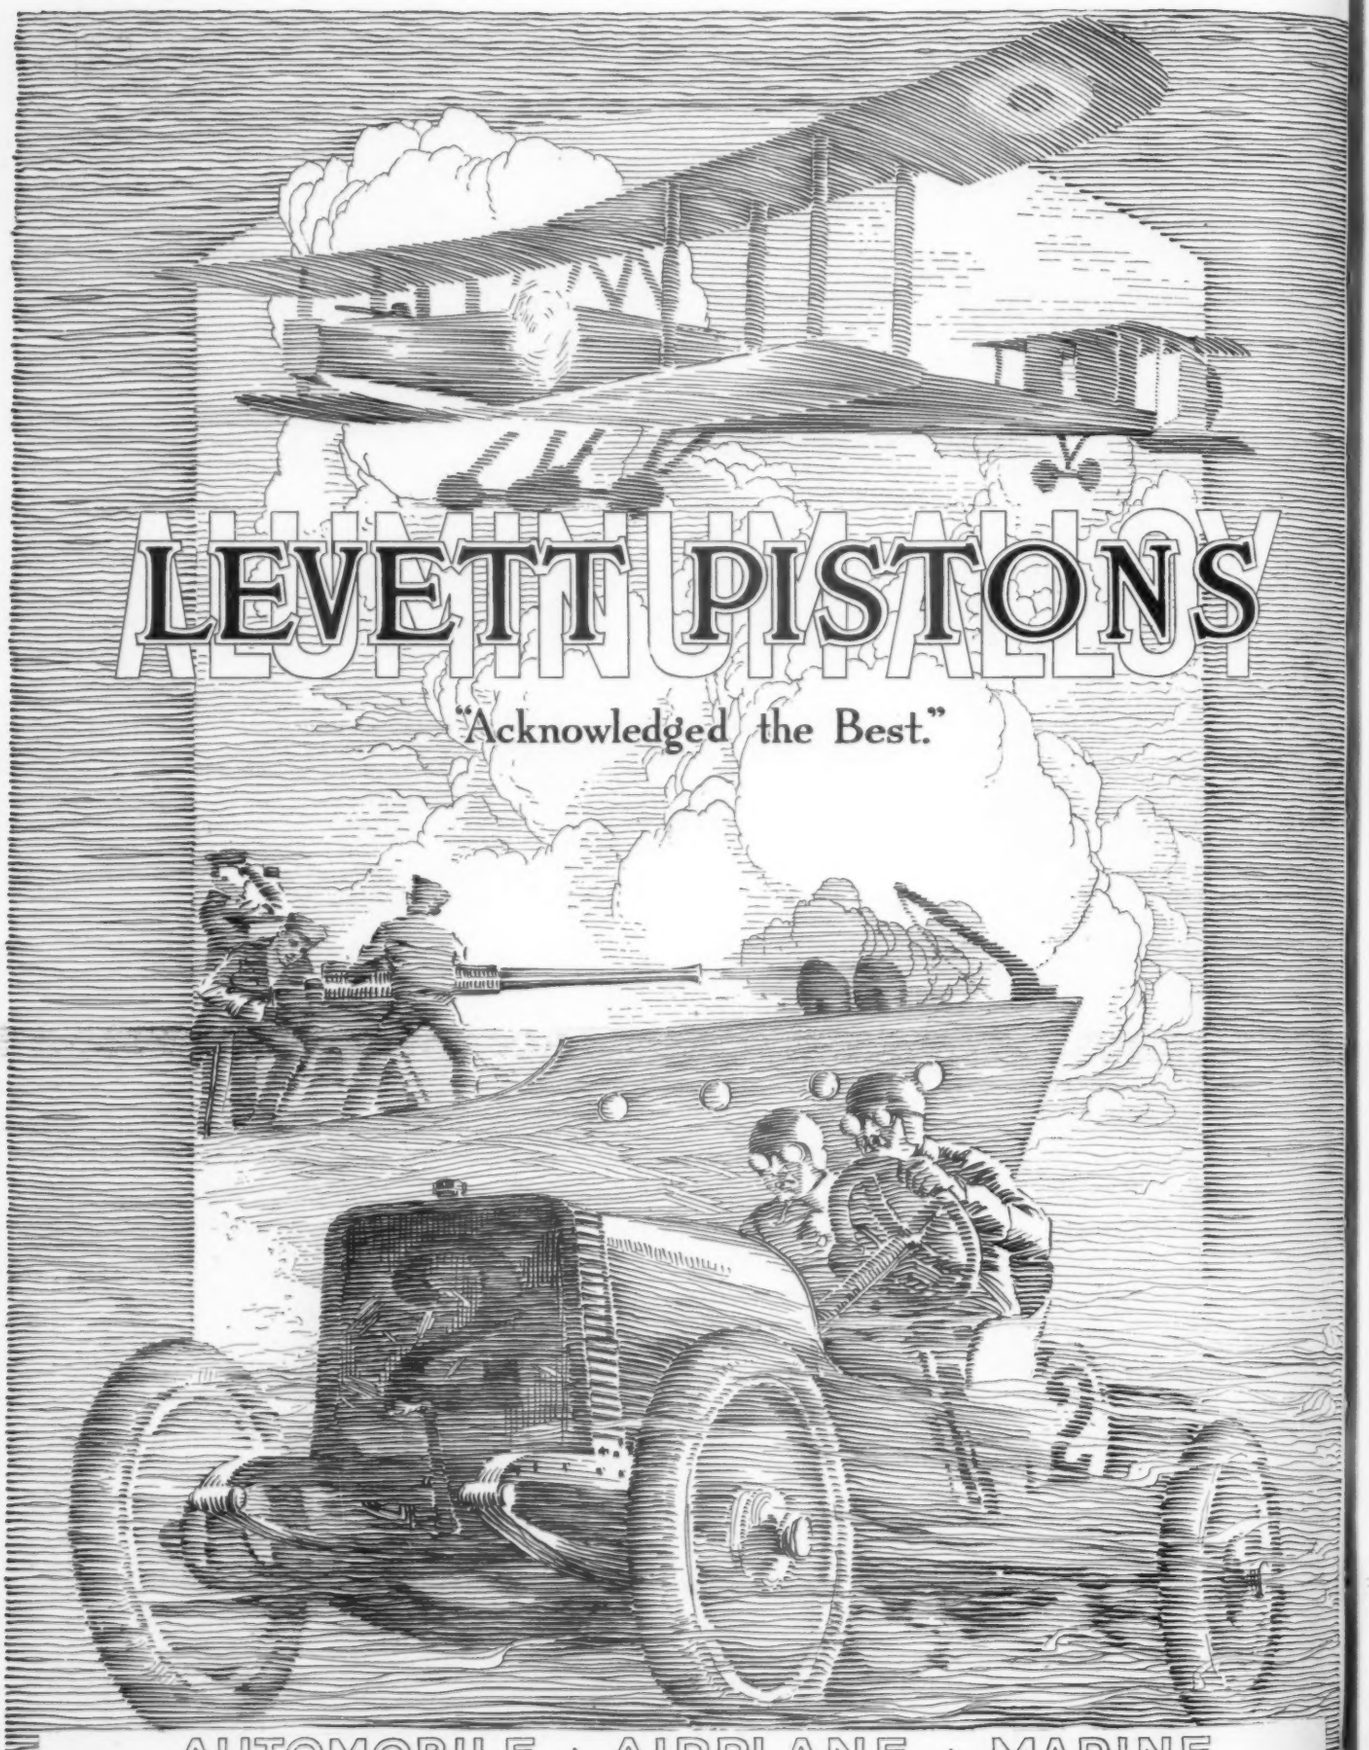
ALUMINUM ALLOY
LEVETT PISTONS
"Acknowledged the Best."
AUTOMOBILE ▲ AIRPLANE ▲ MARINE
WALKER M. LEVETT COMPANY
415 – 421 EAST 23RD ST.
NEW YORK CITY, N.Y.
"The Pioneer Aluminum Alloy Piston Manufacturers."

Gillette Safety Razor

Have You Seen the New Gillettes Specially Designed for the Fighting Man?

THESE models were designed by members of the Gillette Organization who have seen service with the Colors and know what the soldier is up against.

Hundreds of officers and men are buying them — the U. S. Service Set in metal case, and the new Khaki-covered sets for Uncle Sam's soldiers and officers.

The Gillette is the one razor for the man who is doing things — the one razor with world-wide use and reputation.

When a man wants new Blades he can get them at any Post Exchange or Y. M. C. A. Hut—here in America or Overseas.

Our Paris Office carries stocks—is constantly supplying the American Expeditionary Forces. Gillette Safety Razors and Blades on sale everywhere in France, England, Italy and the Eastern battle fronts.

The Gillette Is Accepted Everywhere as the Fighting Man's Razor

He wants to be clean-shaved, trim and alert—in all sorts of weather—and with all kinds of hard or soft or hot or cold shaving water.

He wants everything he carries to be light and compact.

That's why fighting men are using more Gillettes than all other razors put together.

The Gillette has stood the test of hard usage, on every kind of beard and texture of skin—under all sorts of climatic conditions—and proved itself 100% efficient.

The U. S. Regulations call for a clean shave. Every man in the Service needs a Gillette.

The Gillette is the real service razor—compact, sure, convenient—always on the job—no strops or hones to clutter up the kit.

Blades always sharp, always ready—and No Stropping—No Honing.

GILLETTE SAFETY RAZOR COMPANY

BOSTON, MASS., U. S. A.

GILLETTE SAFETY RAZOR COMPANY, OF CANADA, LTD.
73 ST. ALEXANDER ST., MONTREAL

GILLETTE SAFETY RAZOR SOCIETE ANONYME
17 BIS, RUE LA BOETIE, PARIS, FRANCE

GILLETTE SAFETY RAZOR, LIMITED
200 GREAT PORTLAND ST., LONDON, W., ENGLAND

A. G. MICHELES
53 LITEINY, PETROGRAD, RUSSIA

VEDOVA TOSI QUIRINO & FIGLI
VIA SENATO, 18, MILAN, ITALY

WYMAN-GORDON

Airplane Crankshafts

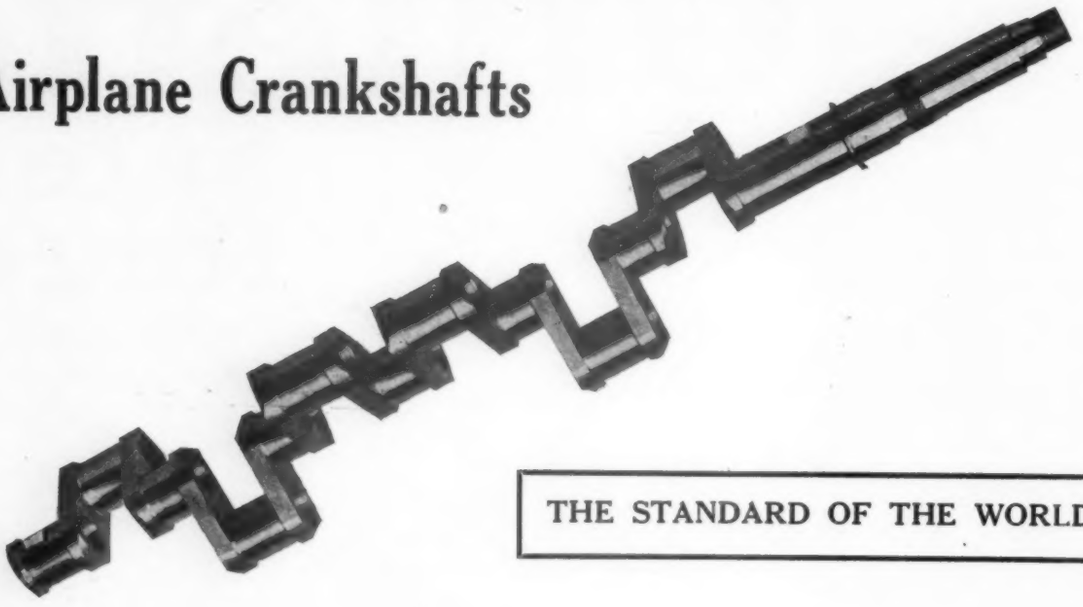

THE STANDARD OF THE WORLD

Wyman-Gordon Company Worcester, Mass., U. S. A.

Safe Behind RESISTAL EYETECTS

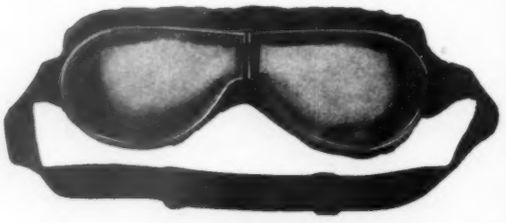

Read how this aviator's life was saved by RESISTAL

"In a recent flight over this city, my engine went dead while I was at an altitude of 4,000 feet. It is needless to mention the numerous conditions which affect the landing of an aeroplane, but I wish to state how the Resistal goggles which I wore undoubtedly saved the sight of my right eye and perhaps even my life.

"As they are of no further use to me, I am returning them to you as a proof of your advertising statement in regard to the unbreakable lenses.

"Could you furnish me with a similar pair, I would be greatly obliged because I have been unable to obtain them in this city and intend to leave for overseas shortly."—*Signed by an officer in the United States Aero Squadron.*

Send for free test pieces of RESISTAL glass and the United States Bureau of Standards Report

RESISTAL S&B.N.Y.

STRAUSS & BUEGELEISEN

Sole Manufacturers

438 Broadway **New York City**

DEALERS:—Write for Catalog and List of Prices that Permit Profits

RESISTAL S&B.N.Y.

JUNE 1, 1918

AVIATION AND AERONAUTICAL ENGINEERING

VOL. IV. NO. 9

Member of the Audit Bureau of Circulations
Member of the Associated Business Papers, Inc.

INDEX TO CONTENTS

	PAGE
Air Propulsion	591
The Friedrichshafen Bombing Biplane	593
The Electrical Dynamometer	596
The S. E. 5A Pursuit Biplane	598
International Aircraft Standards Conference	601
Aliens in American Factories	602
Official Description of the Liberty Engine	603
The 1917 Fokker Triplane	606
International Aircraft Standards	608
Digest of the Foreign Aeronautical Press	609
News of the Fortnight	611

THE GARDNER - MOFFAT COMPANY, Inc., *Publishers*
120 WEST 32D STREET, NEW YORK
WASHINGTON OFFICE, 310 EVENING STAR BUILDING

SUBSCRIPTION PRICE: TWO DOLLARS PER YEAR. SINGLE COPIES FIFTEEN CENTS. CANADA AND FOREIGN: TWO DOLLARS AND A HALF A YEAR. COPYRIGHT. 1918, BY THE ARDNER-MOFFAT COMPANY, INC.

ISSUED ON THE FIRST AND FIFTEENTH OF EACH MONTH FORMS CLOSE FIVE DAYS PREVIOUSLY. ENTERED AS SECOND-CLASS MATTER, AUGUST 3, 1916, AT THE POST OFFICE AT NEW YORK, N. Y., UNDER ACT OF MARCH 3, 1879.

EFFICIENT AERIAL NAVIGATION DEPENDS UPON

Aeronautic Instruments
of
Accuracy and Precision

SPERRY - GYROSCOPE - COMPANY
MANHATTAN - BRIDGE - PLAZA
BROOKLYN - NEW - YORK
U - S - A

LONDON
15 Victoria St., N. W., 1

PARIS
126 Rue de Provence

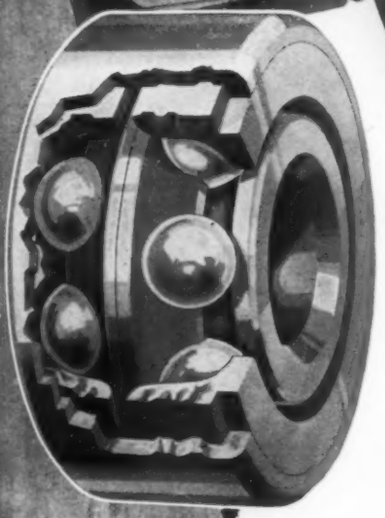

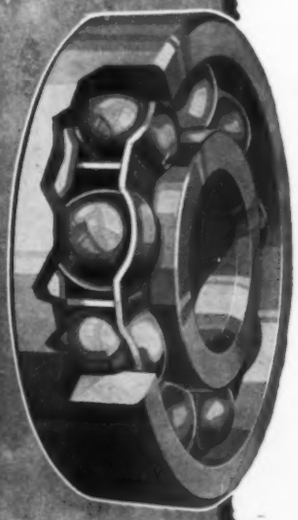

THE aviation motors of the United States and its allies are mounted on New Departure Ball Bearings.

Thereby is attested the reliabile quality and unfailing efficiency of this American-made ball bearing, for if there is any service where every part of the mechanism must be as near perfect as possible, it is service in war aircraft.

New Departure Double Row, Single Row, Radax, and Magneto ball bearings constitute a complete line of modern anti-friction units that are used the world over.

THE NEW DEPARTURE MANUFACTURING COMPANY,
Main Office and Factory, Bristol, Connecticut.
Western Branch: 818 Ford Building, Detroit, Michigan.
Conrad Patent Licensee.
Contractors to the Allied Governments.

New Departure Ball Bearings

343

W. D. MOFFAT
PRESIDENT
W. I. SEAMAN
TREASURER

AVIATION
AND
AERONAUTICAL ENGINEERING

H. M. WILLIAMS
MANAGING EDITOR
LADISLAS D'ORCY
ASSOCIATE EDITOR
GEORGE NEWBOLD
BUSINESS MANAGER

Vol. IV | June 1, 1918 | No. 9

Air Propulsion*

By Morgan Brooks

Professor of Electrical Engineering, University of Illinois

This paper describes experiments with propellers, asserting that the accepted screw theory of air propulsion does not accord with the facts. Air is impelled by a propeller at a speed approaching twice the screw advance for small blade angles, hence the theory of reflection or batting action should replace the screw theory. Thrust is shown to be due in greater degree to velocity and less to blade disk area than is commonly supposed. A method of predicting the complete flying performance of a propeller from a single static test of an accurate model is indicated.

The term airscrew, considered by many writers on aeronautics as descriptive of propeller action, is a misnomer. The theory of the marine propeller, which seems to be adequately presented by the screw principle, has been transferred to air propulsion without sufficient regard for the extreme difference in the two fluids as to elasticity. Imagine automobile tires filled with water. In view of the current theory that air is driven by a propeller with a velocity never exceeding the product of the propeller's pitch and its revolution, it was a surprise to find that air may be driven backward at a velocity nearly twice as great as this product indicates. The fact was so revolutionary as to cause the greatest care in measurement before its acceptance. Recognition of this superspeed action of propellers explains many anomalies of air propulsion and will undoubtedly lead to more exact formulas for thrust and power calculations.

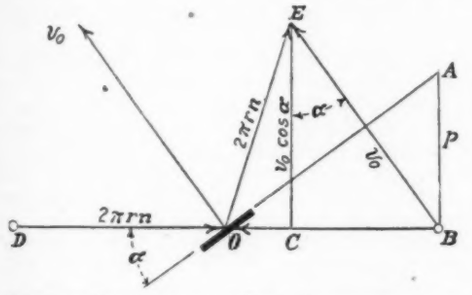

FIG. 1. DIAGRAM ILLUSTRATING TEST CONDITIONS FOR A WIDE-BLADE PROPELLER HAVING A BLADE ANGLE (α) OF 36 DEGREES

The purpose of this paper is to give proofs of the facts stated, and to point out some of the applications of the superspeed theory as it relates to propellers and blowers.

Superspeed is not observed readily in connection with the standard type of two-bladed propeller, owing to the masking of the effect by the mingling of high-speed air with a much larger quantity of inert air lying between the propeller blades. The measurements were made upon a special type of propeller having extremely short blades of great width, sweeping the entire 360 deg. of the disk area, in fact. It should, perhaps, be stated that with the acceptance of superspeed the definition of slip as "the backward velocity of the current from a propeller" must be abandoned; but another definition of slip, "the shortage of velocity of translation as percentage of propeller screw advance," may survive owing to its convenience.

A propeller of the wide-blade type described having an experimental mean pitch of 2.53 ft., gives a wind on static test that flows 3.33 ft. per revolution, regardless of the rotation speed of the propeller. These values were determined for the writer by Prof. E. P. Lesley at the Leland Stanford Junior University wind tunnel, confirming his own measurements. The superspeed ratio, 3.33/2.53, is 1.32, and these figures bear so direct a trigonometrical relation to the blade angle as to suggest that air instead of being swept backward by screw pressure is driven back by precise reflection or batting action.

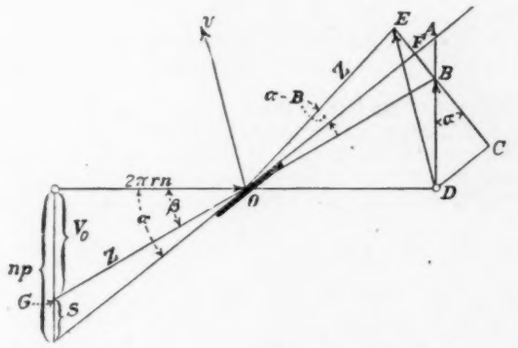

FIG. 2. DIAGRAM ILLUSTRATING TEST CONDITIONS FOR A PROPELLER OPERATING ON A FLYING PLANE OR IN A WIND TUNNEL

The diagram, Fig. 1, illustrates nearly to scale the test conditions for the propeller mentioned above having a blade angle, α, of 36 deg. The blade element indicated at O is moving toward the left at the velocity indicated by the line $BO = 2\pi rn$, around an axis parallel to CE far below the plane of the paper, and strikes an air particle at point D. The relation of particle to blade is unchanged by assuming that the particle D moves to the right at same speed against a stationary blade, and is reflected to point E in unit time. Had the blade not been in the way the particle would have reached B, hence the blade has deflected the particle in the direction BE, represented also by the vector Ov_0 with respect to the plane. Ov_0 is perpendicular to the instantaneous position of the blade when striking the particle. Under the reflection theory assumed, the axial velocity of the air particle is the projection of this vector, that is, $CE = v_0 \cos\alpha = 2\pi rn \sin 2\alpha$. To the same scale BA represents pitch multiplied by revolutions, the accepted air velocity by the screw theory. Since $BA = 2\pi rn \tan\alpha$, the ratio of superspeed velocity to screw-pitch velocity is $CE/BA = 2 \sin\alpha \cos\alpha / \tan\alpha = 2\cos^2\alpha$. For the 36-deg. angle of the special test propeller this ratio, since $\cos 36° = 0.81$, is 1.31, which agrees with the value 1.32 experimentally determined by pitot-tube measurement with sufficient precision to warrant acceptance of the reflection theory, especially when similar close agreement was found with a blade of 28 deg. angle and by other confirmatory tests.

* For presentation at the Spring Meeting, Worcester, Mass., June, 1918, of The American Society of Mechanical Engineers, 29 West 39th Street, New York.

To illustrate the more complex condition of a propeller operating on a flying plane or in a wind tunnel with corresponding wind conditions, Fig. 2 is offered. Here, as before, the blade instead of rotating to the left at the velocity $2\pi rn$, is assumed stationary, and the air particle at G is assumed to move to the right at the velocity $2\pi rn$, combined with the velocity V_o, also reversed, representing the plane's translational velocity, or, in the case of a wind tunnel, that of the impressed wind. In unit time the particle moves along the diagonal path Z, strikes the blade at O, and is reflected to E. The angle of incidence and of reflection is $\alpha - \beta$. But for the blade the particle would have reached B in the same time, so that the blade action is represented by BE, while under the screw theory the motion would be BA, the slip, which is more clearly

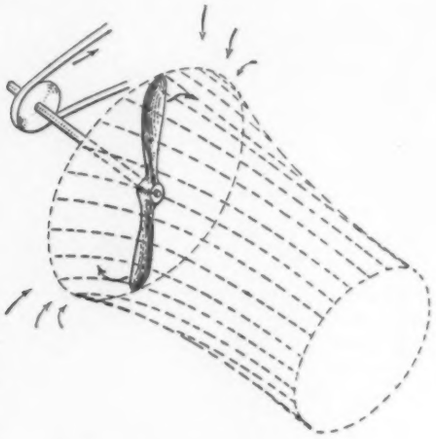

FIG. 3. SKETCH SHOWING DIRECTION OF AIR FLOW FROM A STATIC PROPELLER

indicated as S at the left of the diagram. The axial projection of BE is $BE \cos \alpha$, not represented in the diagram, and the ratio $BE \cos \alpha / BA = 2 \cos^2 \alpha$, the same ratio as found for static test conditions. This relation is derived as follows:

$$BE = 2FE = 2Z \sin(\alpha - \beta) = 2Z(\sin \alpha \cos \beta - \cos \alpha \sin \beta)$$

but

$$Z \cos \beta = 2\pi rn = np \cos \alpha / \sin \alpha$$

and

$$Z \sin \alpha = V_o$$

hence

$$BE = 2 \cos \alpha (np - V_o)$$

and

$$BE \cos \alpha = 2 \cos^2 \alpha (np - V_o)$$

Thus either for static or flying tests an air propeller produces a velocity or a change in velocity which has a superspeed ratio of $2 \cos^2 \alpha$ as compared with the screw-advance theory. This factor varies from nearly 2 for low pitch angles found near the blade tip to 1 for a 45-deg. angle, the steepest blade angle for effective work in propellers. For a propeller of constant pitch equal to diameter, a normal design, the superspeed ratio is 1.8 for the blade tip and 1.4 at half radius. Since the activity of propellers is confined mostly to the outer half of the blades, normal values for superspeed would lie usually between 1.5 and 1.6.

In wind-tunnel tests, where alone velocities of the air can be measured satisfactorily, the propeller activity BE is combined vectorially with the wind velocity V_o, making the vector DE, represented also by Ov, the velocity to be measured. The difference between this and $DA = np$ is not very marked, except at rather heavy slip conditions. For low blade angles, however, where the superspeed ratio is more pronounced, careful speed measurements show that the air leaves the propeller at higher velocities near the blade tips than part way in, a condition inconsistent with the screw theory for standard-type constant-pitch propellers. Eiffel's "Recherches" presents an elaborate collection of data showing this condition to exist, for which no explanation is offered, but the reflection theory explains it.

When the direction of the air flow from a static propeller is investigated by means of light ribbons, they show that the air moves in a direction strictly perpendicular to the blade angle, the condition demanded by the reflection theory but not by screw action. Moreover, these ribbons indicate that the stream contracts in diameter slightly as it leaves the propeller with its rotating whirl, whereas with the squeezing action of a screw it would be expected that the air would be expanding rather than contracting. Fig. 3 is an isometric drawing to show this rotating, contracting whirl.

The most convincing demonstration of the velocity of air leaving a propeller faster than the propeller screw advance is found in a test made with two propellers connected in tandem, illustrating a wind-tunnel test. Calling the forward propeller a blower, for distinction, assume that it provides a wind at 30 miles per hour, or 44 ft. per sec., and that the propeller is driven in this wind at a speed just above idling speed, such that its revolutions times pitch is, say, 48 ft. per sec. An anemometer shows a velocity of about 50 ft. per sec. If now the blower be shut down, while the speed of the propeller is maintained constant, the wind velocity rises to 75 ft. per sec. instead of remaining constant as demanded by the screw theory.

Accepting superspeed, then, it is seen that since the air is driven backward at an excess rate, the thrust due to this unexpected acceleration is, by the Newtonian laws of dynamics, due in greater degree to speed and less to the quantity of air handled than is commonly supposed. It has long been recognized that the evaluation of dynamic thrust equations requires the questionable assumption of blade activity over a larger portion of the propeller disk than that covered by the blades alone. Indeed some authorities, such as Riach,[1] use the entire disk area as that actuated by the propeller. Seventy-mile flight at 30 per cent slip is commonly supposed to mean that the air is driven backward at 30 miles per hour, while its actual speed is nearer 50 miles per hour. This means that the column of air with respect to the plane is not 100 miles but about 120 miles per hour in length. No wonder it is difficult to get satisfactory results from air-dynamics formulæ now in use, except from well-developed empirical formulæ.

The proper interpretation of superspeed bids fair to reconcile the thrust and power values as derived from the static tests with those of wind tunnels or of flight, whereas it seems to be the common opinion today that flying performance cannot be predicted from static tests. With the precise air-dynamics formulæ sure to come, a single static test of a propeller should furnish all necessary data for the production of complete flying-performance curves.

As a preliminary empirical approximation the following formula may prove useful: $T = T_o - T_o'$, where T is flying thrust, T_o the static thrust at propeller speed n, and T_o' the static thrust at propeller speed V/p, where V is plane velocity and p propeller pitch. That is, T_o' is taken statically at what is idling speed in the wind. Since all static-thrust values are proportional to the square of the rotations, a single static thrust at any speed enables both T_o and T_o' to be derived. The physical meaning of this seems to be that the wind-tunnel blower relieves the propeller of that portion of T_o represented by idling speed, even though the propeller, giving superspeed, sends air backward when tested statically at speed V/p, faster than velocity V. Under this formula the flying thrust at 30 per cent slip is found to be 51 per cent of the static thrust at speed n.

Correct air-dynamics formulæ will not produce the changes in propeller design that might be anticipated, since propeller, or air bat, is extraordinarily efficient today. However, it is hoped that this paper may lead to a clearer conception of the underlying physical principles of air propulsion.

[1] Efficiency Variation in Airscrews, AVIATION, April 1, 1918.

Book Review

MY AIRMAN OVER THERE. By His Wife. (Moffat, Yard & Co., New York. $1.35. 288 pp.)

This book is all in a class by itself among the countless literary productions resultant from the World War. The letters around which this book has been written by "His Wife" are those of a British fighting airman and disclose the tale of a romantic love story interspersed with gripping adventures of the air.

The latter are most thrillingly described and truly rank with that well known classic—"Cavalry of the Clouds," which is paying no mean compliment to the author of these letters.

The Friedrichshafen Bombing Biplane

This machine, which bears the marks F.D.H. G.3. 326/17, was brought down by anti-aircraft fire at Isbergues on the night of February 16. A shell made a direct hit on the right-hand engine at a height of 8,000 to 9,000 feet, after which the machine covered about six miles and made a fairly good landing.

Various parts of the structure bear different dates, that on the tail being 14/1/18. The main spars are branded with a small crown and the letters Z.A.K. The following is painted on the side of the body:

Leergewicht (weight empty), 2,695 kilogrammes = 5,929 lbs.

Nutzlast (useful load), 1,235 kilogrammes = 2,717 lbs.

Zulässiges Gesamtgewicht (permissible total weight), 3,930 kilogrammes = 8,646 lbs.

Crew—This machine carried its full complement of four persons, namely, pilot, fore-gunner, after-gunner and bomber. It is known, however, that the number of crew varies considerably, as some machines of this type have only carried two persons. The accommodation is so arranged that the personnel can easily change places, all the cockpits being intercommunicating.

General Description—The general design of the machine is shown in Fig. 1, which gives plan and front and side elevations.

The principal dimensions are as follows:

Span	78 ft.
Maximum chord	7 ft. 8 in.
Gap	7 ft.
Dihedral angle in the vertical plane	1½°
Dihedral angle in the horizontal plane	6°
Total area of main planes	934.4 sq. ft.
Area of upper main planes without flap	480 sq. ft.
Area of lower main planes without flap	454.4 sq. ft.
Load per square foot	9.24 lbs.
Weight per horsepower	16.6 lbs.
Area of flap of upper wing	21.6 sq. ft.
Balance area	1.8 sq. ft.
Area of flap on lower wing	16 sq. ft.
Balance area	1.56 sq. ft.
Total area of fixed tail planes	57.6 sq. ft.
Total area of elevators	32 sq. ft.
Balance area of one elevator	1.7 sq. ft.
Area of fin	20 sq. ft.
Area of rudder	19.2 sq. ft.
Balance area of rudder	3 sq. ft.
Maximum cross section of body	19.2 sq. ft.
Horizontal area of body	133 sq. ft.
Vertical area of body	131.2 sq. ft.
Length overall	42 ft.

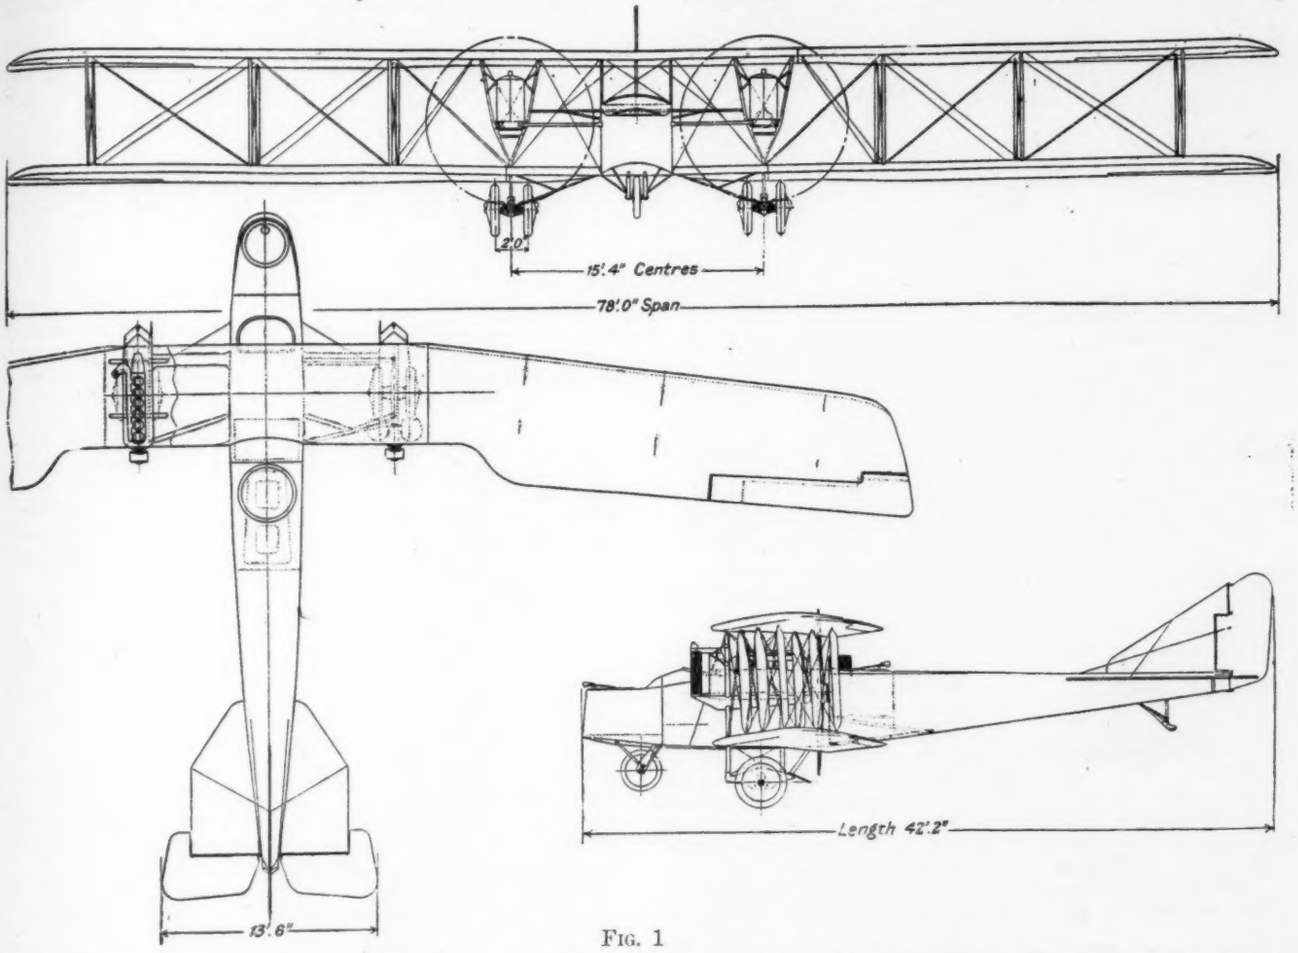

FIG. 1

The machine is built up upon a central section, to which are attached the forward and rearward portions of the body and the main planes. This central section comprises the main cell or cabin of the body, containing the tanks, bombs, etc. It also embraces the engines and the central portion of the upper and lower planes. The latter, together with the engine struts, are largely built up of steel tube, as is also the landing gear.

The central portion of the body, which measures 4 ft. across by 4 ft. 3 in. in height, consists of a box formation made of ply wood, strengthened by longerons and diagonals, and transversely stiffened by ply-wood bulkheads. The bulkhead furthest forward acts as an instrument board, behind which are side by side the seats of the pilot and his assistant. The former has a fixed upholstered seat, whilst that of the latter is folding, consisting of a light steel tubular framework with a webbing back-rest.

Underneath these two seats is the lower main gasoline tank. Behind this cockpit the body is roofed in with ply wood, the rear part of which roofing is detachable so as to give access to the second main gasoline tank, which is at the rear end of the main body section. By this means a small cabin or covered passage-way is provided, at each side of which are the racks for the smaller bombs.

Central Portion of Wings—The central and non-detachable portion of the upper plane has a span of 19 ft. 5 in., whilst at each side of the nacelle the lower plane fixed portion measures 7 ft. 8 in. The main wing spars in this central portion are of

steel tube, roughly 2 in. in diameter, with a wall thickness of 1/16 in.

As shown in Fig. 2, these spars are braced by steel tubes

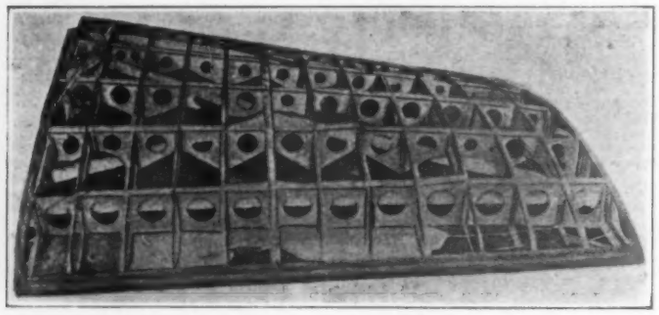

FIG. 2. CENTER SECTION OF LOWER MAIN PLANE WITH THREE-PLY SURFACING REMOVED

arranged in the form of an X, the manner in which the bracing tubes are attached to the main spars being shown in the sketch Fig. 3.

The lugs are built up by welding, and are pinned and riveted in position, the joint being of the plain knuckle type.

The upper surface of the lower plane is, so far as the central section is concerned, covered in with three-ply wood.

In this portion the main ribs are of three-ply, with spruce flanges. Between each main rib is a cut-away rib, the design of which is shown in the sketch Fig. 4. This, unlike the main ribs, is one piece of wood, and not built up. For the greater part of its length it applies to the top surface only, being cut away to pass clear of the cross bracing tubes.



FIG. 3

As shown in Fig. 2 the plane is further stiffened with transverse members consisting of three-ply panels between each rib strengthened by grooved pieces top and bottom.

The central section of the upper main plane is in one piece and is covered top and bottom with fabric. In order to facilitate the removal of the engines, detachable panels measuring 1 ft. 11½ in. long by 1 ft. 8 in. deep are let into the trailing edge immediately over the engine bearers. These panels are socketed in front, and at the rear are joined up at the trailing edge with U section sheet steel clips and bolts.

The struts which connect the top of the nacelle to the upper plane are tubular and of streamline section, as are also the



FIG. 4

engine bearer struts. A section of one of the latter is given in Fig. 5. The thickness of the wall is one-sixteenth of an inch.

The method of attaching the lower end of the engine struts to the tubular steel spars is shown in the sketch Fig. 6, from which it will be seen that a welded Y socket is used and secured by a pin joint, the ends of the pin acting as anchorages for the attachment of the bracing wires.



FIG. 5

This sketch also shows the lugs which respectively support the detachable portion of the main planes and the vertical strut of the landing chassis. The engine bearer struts are pushed into the Y socket and pinned in position, the pins being afterwards brazed into the socket. At their upper ends the engine struts are fixed to the top plane spars with pin joints.

Construction of Wings—The detachable portions of the wings are fixed to the center section by pin joints, one part of which is shown in Fig. 6, the male portion being represented in Fig. 9. The chord of the wing in the line of flight varies from approximately 7 ft. 8 in. to 7 ft. 5 in., and the wing section is shown shaded in Fig. 10. In order to provide a basis of comparison the R.A.F. 14 wing section is superimposed and drawn to the same scale.

The main spars are placed one meter apart, the front spar

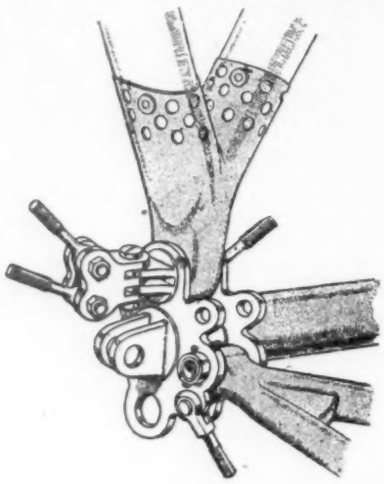

FIG. 6

being 272 mm. in the rear of the leading edge. Both spars are of the built up box type, as shown in Figs. 11 and 12. The former is the leading spar and the latter the rear spar. These spars are of spruce, and each half is furnished with



FIG. 7



FIG. 8

several splices, so that the greatest single length of timber in them is not more than 14 ft. The splices, which occur in each half alternately, are of the plain bevel type about 15 in. long and wrapped with fabric. A fabric wrapping is also applied at short intervals along the spar.

Internal cross bracing between the main spars is afforded by steel tube cross members and cables attached as shown in the sketch Fig. 9.

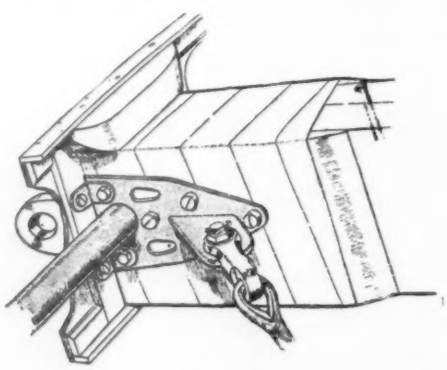

FIG. 9

The main spar joint consists of a steel plate 19 mm. thick embedded in the spar end and held in position by five bolts,



FIG. 10

which pass through a strapping plate surrounding the end of the spar. This plate also carries the attachment for the

bracing cable and is furnished with a spigot which locates the bracing tube. It will be seen that at this point the spar is provided with tapered packing pieces of hard wood glued and held in position by fabric wrapping.



FIG. 11

The main ribs are placed 360 mm. apart. Between them are auxiliary formers, consisting of strips of wood 20 mms. × 10 mms. thick, which run from the leading edge to the rear spar. The main ribs consist of ply wood webs socketed into grooved spruce flanges, which are tapered off, except where they are met by a longitudinal stringer. The leading edge is solid wood moulded to a semi-circular section of approximately 65 mm. diameter. Where the rib web abuts against it, packing pieces are glued each side. Between the main spars the web of the rib is divided by three vertical strips into four panels and in each of these it is perforated, leaving an edge all around about 72 mm. wide.



FIG. 12

As shown in Fig. 9, the upper flange of the main ribs is carried clear of the leading spar by means of packing pieces. In the case of the rear spar, packing pieces are also used under the rib flange, as shown in Fig. 13.

The lower main planes for a width of about 2 ft. 3 in. at their inner end are covered as to their top surfaces with three-ply wood.

The interplane struts are attached to the main spars by joints of the type shown in Fig. 14. This, it will be seen, follows the typical German practice of partially universal jointed mountings for the cable attachments. At the points of attachment of these strut joints, suitably tapered packing pieces of hard wood surround the spars, which at these points are also wrapped with fabric.



FIG. 13

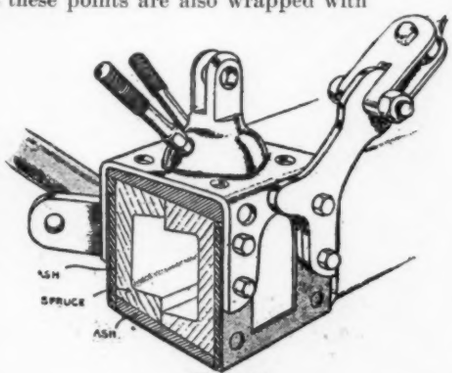

FIG. 14

Struts—Outside of the center section the interplane struts are of wood built up, as shown in the section Fig. 15, of five separate pieces. The curved portions are of timber which has not yet been identified, but is apparently of poor quality. The cross web is of ash. The strut is wrapped at frequent intervals with strips of fabric and is fitted with a socket joint of the type shown in Fig. 16. The outer pair of struts are of smaller section than the main struts, but are built up in a similar manner. Their section is 125 mm. × 40 mm.



FIG. 15

Ailerons—The framework is principally of welded steel tube wrapped with fabric.

A notable point is the thick section of the leading edge of the balanced portion, as shown in Fig. 17.

Fin and Fixed Tail-Planes—The framework of these is steel tube and in the case of the tail-planes wooden stringers running fore and aft are arranged at intervals. The tail-planes are supported by diagonal steel tubes of streamline section, on the under side of which sharp steel points are welded to prevent these stays being used for lifting purposes.

Elevators and Rudders—The framework in each case is of steel tube, the main tube being 35 mm. in diameter and the remainder 15 mm.

Bracing—Throughout the wings, both internally and externally, the bracing is by means of multi-strand steel cable.

Body (Rear Portion)—At the after-gunner's cockpit the section of the body has a rounded top, which is gradually smoothed down into flat. The section, for the greater part of the length, is rectangular, and the frame is built up in the usual maner with square section longerons and verticals, the joints being arranged as shown in Fig. 18. The cross bracing wires along the sides, top, bottom, and diagonal are of steel piano wire and are covered with strips of fabric, as shown in this sketch, where they lie adjacent to the fabric body covering.

FIG. 16

The vertical and horizontal compression members are located by spigots. The joint consists of a plate which completely surrounds the longerons, its two ends being riveted together to form a diagonal bracing strip. For the last few feet at the tail the body is covered with thin three-ply.



FIG. 17

The body is covered with fabric, which is held in position by a lacing underneath and is consequently bodily removable.

The floor of the after-gunner's cockpit is elevated above the bottom of the body. Immediately underneath this cockpit is a large trapdoor, which is hinged at its rearward end and furnished with two large celluloid windows. It is held in its "up" position by a long spring and a snap clip. No means could be found by which it could be fixed in its closed position. As footsteps are provided for all the cockpits, this trapdoor is evidently not intended for ingress and egress. It could be employed in connection with a machine gun firing backwards, as in the Gotha, but no machine gun mounting was fixed in this machine for this purpose.



FIG. 18

The rear portion of the body is attached to the center section of the body by a clip at each corner. This is shown in Fig. 19. The rear portion carries a male lug, which engages with the two eyes, and is held in position by a ⅜ bolt. Four other bolts in tension pass through the sheet metal clip, as shown in the sketch. In each case the lugs are furnished with sheet steel extensions which, as shown in the sketch Fig. 19, are sunk flush into the top and bottom surfaces of the body longerons and are there held with three bolts. The corner joint is welded sheet steel, and there is an additional diagonal sheet steel joint which serves the secondary purpose of providing an anchorage for the bracing wires.

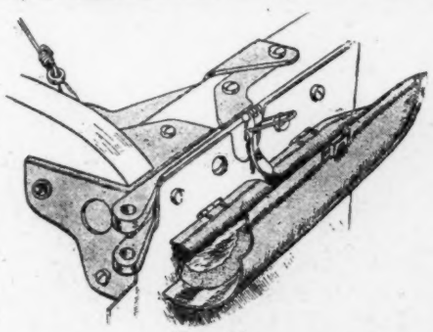

FIG. 19

As this body joint is level with the plane of rotation of the propellers, it is armored both on the nacelle and on the rear portion of the body with a hinged covering of stout sheet steel lined with felt. A plate of armor a foot wide also extends down each side of the nacelle at this point.

(*To be continued*)

The Electric Dynamometer

By C. F. Scott

The extensive use of electric dynamometers for aviation motor testing prompts the presentation of these notes on the operation of dynamometers for the benefit of those who are called upon to operate them.

The operator finds the electric dynamometer so radically different in most respects from the propeller or club test which he may have seen elsewhere that he is at first apt to regard his task as difficult or complicated. A brief acquaintance with it, however, shows it to be extremely simple.

The tester finds himself indoors instead of outdoors, comfortably warm in winter, absolutely safe, with no dangerous hand starting or "throwing-over," and with easy access to the engine. The equipment is easily handled by a man not previously trained in electrical matters. A good engine man has no difficulty with his electrical dynamometer. It is made as nearly fool-proof for him as possible.

On taking up the work of running an electric test-stand there are two matters which should receive the operator's attention. The first is the principle involved. The second is to see that the set-up and accessory lay-out are right.

The principle involved is best presented by a comparison with a propeller or club test. The propeller or club acts as a brake, restraining the speed of the engine. It can hold down a certain load, and no more (except as noted below) at a certain speed. To change that load the propeller or club would have to be made larger or smaller, that is, another size or pitch used. The exception to this fact comes when there is obstruction to the free flow of air from the club, as may be caused by walls or casings. This will change the load and throw off the calibration.

Furthermore, the club absorbs power at a rapidly increasing rate as the speed is raised. Thus, if a propeller produces a load of 90 hp. on the motor at 1400 r.p.m., it will only load the engine to about 35 hp. at 900 r.p.m. If the speed were raised above 1400 by 10 per cent to 1540, the load would be raised 20 to 30 per cent, more than the engine could pull.

Now, the electric dynamometer acts also as a brake, but the amount of load at a given speed is not fixed, but can be set by turning the field-rheostat handle (circular hand-wheel on the switchboard) to any desired amount. Bearing this in mind, the operator will load the engine to the horsepower called for on his specifications, if on routine test, but will not attempt to put a continuous load at every speed which is as much as the engine will pull for a short time at that speed. Aviation motor carburetors are set generally for greatest efficiency at a given speed with full throttle, and, if the motor is run at full throttle at a lower speed, it will not be running under ideal conditions. On the other hand, in experimental work the operator can make a real power curve on the engine and make determinations and adjustments impossible to be made with a propeller or club, with its fixed load.

The Way Power Is Measured

Another of the principles to remember is the way power is measured. With the cradle dynamometer power is the

Electric Dynamometer in Commission

product of r.p.m. multiplied by the scale reading and divided by a constant. This constant will depend on the particular scales used. It is usually 3000 or 1000; that is, hp. = r.p.m. × scale reading in lbs. divided by 3000 on one type of scale, or by 1000 on another.

The operator will look carefully for any binding in the scale parts or any restraint in the free movement or oscillation of the dynamometer field on its trunnions. With these features correct, there are no variations in reading of power. The results are true. If the expected power is not indicated, it is not there.

This last requires the qualification that the power an electric dynamometer can absorb depends on the amount of electric current which can be forced through the external circuit. The external circuit is usually a bank of grids, in experimental work, laid out to absorb a certain maximum and capable of adjustment. Lowering the resistance or shortening it increases the load. The test of this is to see if there is any more leeway in the field rheostat. If the hand wheel is turned all the way to the left, and the dial-switch all the way to the left, and all load switches in, and still the engine cannot be "pulled down," the remedy must be sought in "shortening the grids" or installing another bank, if the dynamometer itself hasn't reached its limit. If, on the other hand, the dynamometer is pumping back or returning current to the line, the amount of load which can be put on the dynamometer is dependent on the load on the line. In a big shop, using thousands of kilowatts of electric energy, there is no trouble about getting a load.

Now, as to the second point, the accessory lay-out. First comes the matter of foundations. These cannot be too secure. There should be two feet of concrete under dynamometer and engine bases, and the bases should be securely bolted or grouted to the foundations. They should be absolutely level. If the foundations are insecure, disastrous vibration will result.

Next come the engine stands. These, too, must be secure. Rigid stands with wooden side timbers are considered best. Flexible stands have been used, but these must not be such as to increase any vibrations the engine may set up.

Third to consider is the coupling. This must be strong enough for the work and flexible. The coupling gets a good deal of strain, more than may appear at first to the observer.

Correct alignment of motor and dynamometer shafts is essential. Otherwise the bearings and crank-case may be subjected to strain and the coupling will heat up, cause a loss of power recorded, and perhaps fail. The coupling should have considerable flywheel effect.

Water Circulation

Next comes the matter of water circulation for the engine. A fairly large tank is required, in order to maintain a sufficiently low temperature of intake. If the tank can be kept overflowing with cold water, so much the better. The circulation should be equivalent to that in the plane with the radiator exposed to a draft created by flight.

Then comes the oiling system. If the engine has a separate oil-cooling tank or radiator when installed in the plane, this should be duplicated in the test room. A long coiled pipe, either cooled by natural radiation or by immersion in water, should be provided for the external oil circulation. If the oil is cooled in flight simply by radiation from the pan or sump, the engine in test should have provided for it a draft of air to keep the pan cool.

Next comes the question of cooling the engine and carrying away the exhaust. With some types of engine it has been the practice on dynamometer testing to encase the engine and blow a stream of air over it by a motor-driven blower. This takes away the exhaust gases also, and incidentally a great part of the noise. With engines that are completely water-cooled, a blower for the exhaust gases alone is needed, if proper water and oil circulation is provided. This exhaust gas blower is conveniently made as a collapsible hood that can be drawn down to the top of the engine after the latter is set up. A small exhauster in the overhead discharge and an open motor driven fan near the engine to direct all air current into the hood should be supplied.

The effect of the wind set up by a propeller or club acts chiefly on the exhaust and does not cool the water and oil tanks after the manner of the wind set up by flight through the air. The wind on the propeller test stand is, so to speak, all on the outside of the circle.

Finally, there is the matter of electric current supply for exciting the dynamometer fields and for starting. This must be D. C. and it will usually be supplied at 220 to 240 volts. If the shop is using A. C. power generally, a rotary converter

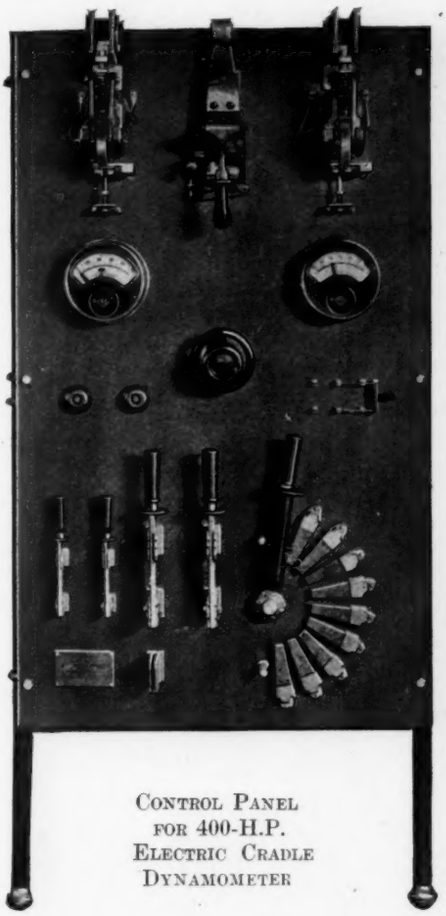

CONTROL PANEL FOR 400-H.P. ELECTRIC CRADLE DYNAMOMETER

or motor generator set will be used to transform the power from A. C. to D. C. This must be at least large enough to provide all the power needed for starting the newest and stiffest engine. It is much more economical to have it big enough to handle the full power of as many dynamometers as may be running together under load at one time.

Actual Operation

Now we come to the actual operation. We will assume the equipment installed and set up ready for running, with all electric connections made and everything about the motor in readiness.

The accompanying photograph shows the standard control panel for a 400 hp. electric cradle dynamometer. The two meters shown have nothing to do with the measurement of power on this outfit. The voltmeter is used when the machine is "pumping back" to compare the voltage of the dynamometer with that of the electric supply line. The ammeter serves to show whether the current in the dynamometer is greater than that for which it was designed. The full load current in amperes is stamped on the nameplate of the dynamometer. A heavier current than this is an overload, even if the horsepower is lower than the rated horsepower, due to a weak field, which of course is simply a matter of rheostat adjustment. The dynamometer will stand a heavy overload for short periods, but when the overload exists, as indicated on the ammeter, the machine should be watched to prevent overheating.

The circuit breaker protects against too much overload. An auxiliary switch is provided on the circuit breaker to short the engine ignition if the breaker should go out.

There is a small double-throw switch on the panel which is used to reverse the dynamometer rotation, as would be required if right and left-hand engines both were to be tested.

Before starting it is a good plan to open this switch just a little to see if an arc is formed. If so, the field is excited. If not, there is no current on the field and the current supply must be looked into.

Now we are ready to go ahead. Open all the switches except the double-throw field switch. Open the circuit breaker. Turn the circular hand wheel of the field rheostat around to the left as far as it will go. Turn the handle of the dial-switch or controller up and to the left as far as it will go.

There are two operating conditions—first, loading on the resistance; second, loading back on the line. We will take up the first condition. Close the circuit breaker. Close the big 2-throw knife switch to the bottom. Push the "Start" button. The engine should at once turn over. As soon as the engine "fires," push the "Stop" button. Keep the throttle pretty well closed, the engine turning slowly.

Now, turn the field rheostat hand wheel sharply around to the right most of the way. Turn the controller or dial-switch handle way down to the right. Close all the knife switches to the top, including the switch that had been thrown to the bottom on starting. The load is now on.

The man at the throttle now opens up and the man at the dynamometer builds up the load by turning the field rheostat hand wheel slowly to left. The engine is loaded and the load can be brought to the desired value by simply turning the hand wheel. The load should be brought on gradually, watching the engine.

The dynamometer operator watches the tachometer, holding the speed to the desired value by manipulating the hand wheel. Let us assume a power reading is to be taken at 1200 r.p.m. The engine will be brought up to a speed a little above that, and then pulled down to 1200 by turning the hand wheel gradually, allowing the engine speed to settle. When running smoothly at 1200, the scale reading is noted. When making a power curve, the speed is brought up in successive steps to a little above the values at which readings are to be made, and then brought back or settled to even values, 800, 900, 1000, etc., etc.

When making a long run at a given speed, the operator should watch his scales closely. If the torque drops off, and the speed, and does not come back, the engine needs looking to. The close and accurate readings possible with electric dynamometers have saved many a new engine on its first test by giving a timely warning in this way.

If the test requires pulling the engine down to a very low speed, the dial-switch or controller handle may be moved back to the left, to increase the low-speed load beyond what can be accomplished with the field rheostat hand wheel.

When loading a small engine on a 400-hp. dynamometer, the two knife switches at the left of the panel can be left open.

The second condition, loading back on the line, involves the same operation in starting. But in this case the dynamometer is left connected to the line circuit. Close the circuit breaker. Close the two-throw knife switch down or to the bottom. Turn the hand wheel to the left and the dial-switch handle to the left. Push the "Start" button. When the engine "fires," turn the dial-switch handle all the way down to the right. The dynamometer will then be pumping back. The speed will probably be 1200 to 1500 r.p.m., depending on what speed the engine should run for the period of the test. Under these conditions the amount of load on the engine will depend on the throttle setting entirely, the effect of turning the field rheostat hand wheel being simply to vary the speed.

A refinement of starting can be obtained by turning the hand-wheel to the right part way before pushing the button, reducing thereby the starting power of the dynamometer to a point where the engine fails to turn. Then, by turning the hand-wheel back, the engine can be "broken loose" very gradually.

Another refinement consists in leaving the slow-speed switch closed on starting. This is the righthand switch of the four shown in a row on the panel, just to the left of the dial-switch. With this arrangement a maintained slow lapping-in speed may be had.

Both of these refinements require a good supply of starting current available.

The panels on some outfits are not identical with that shown in the cut, but the general principle is the same in all.

The S. E. 5A Pursuit Biplane

In the March issue of the German aviation magazine *Luftwaffe* the following description of the British S. E. 5A pursuit biplane was published, a translation of which is here reprinted by courtesy of *The Aeroplane:*

The airplane in question was built by Vickers, Ltd., and was numbered B.507, bearing further the initial A as well as a white circle. The propeller was marked: S. E. 5A., which leads to the idea that the older model of this same airplane type with the 150 hp. Hispano engine of the non-geared-down model is called S. E. 5.

The biplane has a surface of 22.8 sq. m., and both planes, connected with but one pair of struts to each side, have a span of 8.15 m., and a chord of 1.52 m., the gap from the top of the body amounting to 0.45 m.

No arrow-shape is to be found on this machine. The V-shape of the equal-sized ends of the upper and lower planes mounted on the center section and respective body rudiments amounts to 1.71 deg.

The sight field of range is improved by cutting out the center section in the middle and the lower planes near the body.

Above the angle of incidence is 5 deg. mean, below, near the body 6 deg., near the struts 5 deg.

Both wing spars show sections of I shape, whereas the longerons of the rudiment pieces, running through the body are steel tubes of 1.75 mm. thickness, and 45 mm. outer diameter. The plane ribs show the usual construction of most British airplanes.

There are no compression struts between the spars, some of the ribs being solid struts instead.

The interior wiring of the planes between the body and the struts is carried out in simple profile wire, that of the overhanging ends by thick-ended wire.

A wood strip forms the trailing edge of the planes. Further,

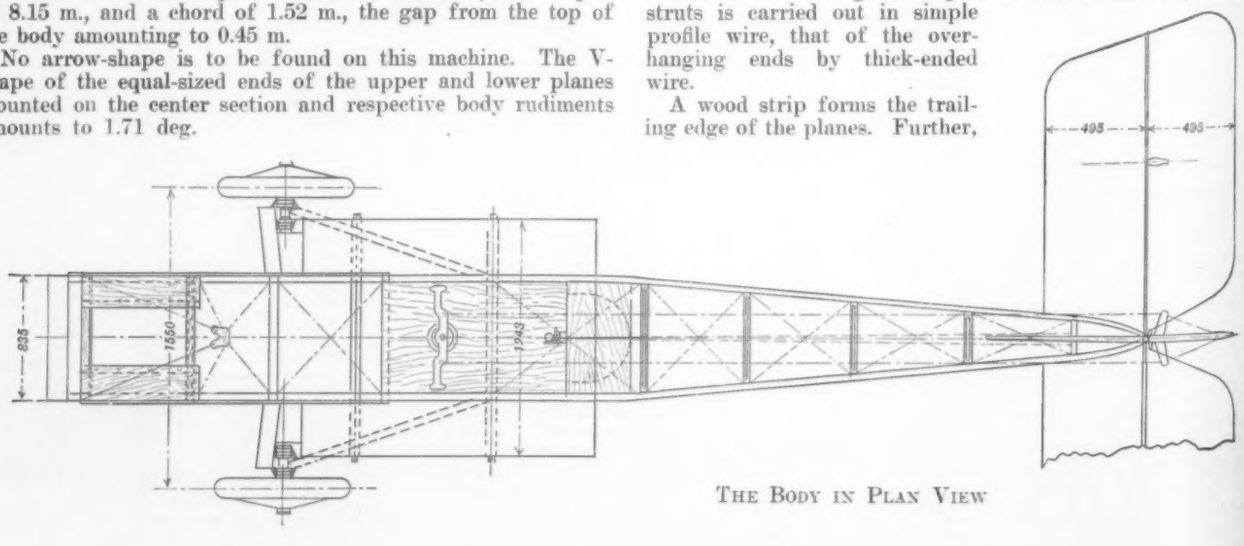

THE BODY IN PLAN VIEW

two auxiliary ribs ranging from the leading nose edge to the main spar are arranged between each two ribs.

The fabric is sewed onto the ribs, and is painted yellow below, browned above, as is the fabric of the body. Shoe-eyes are arranged on the underside of the trailing edge of the plane to assess the pressure.

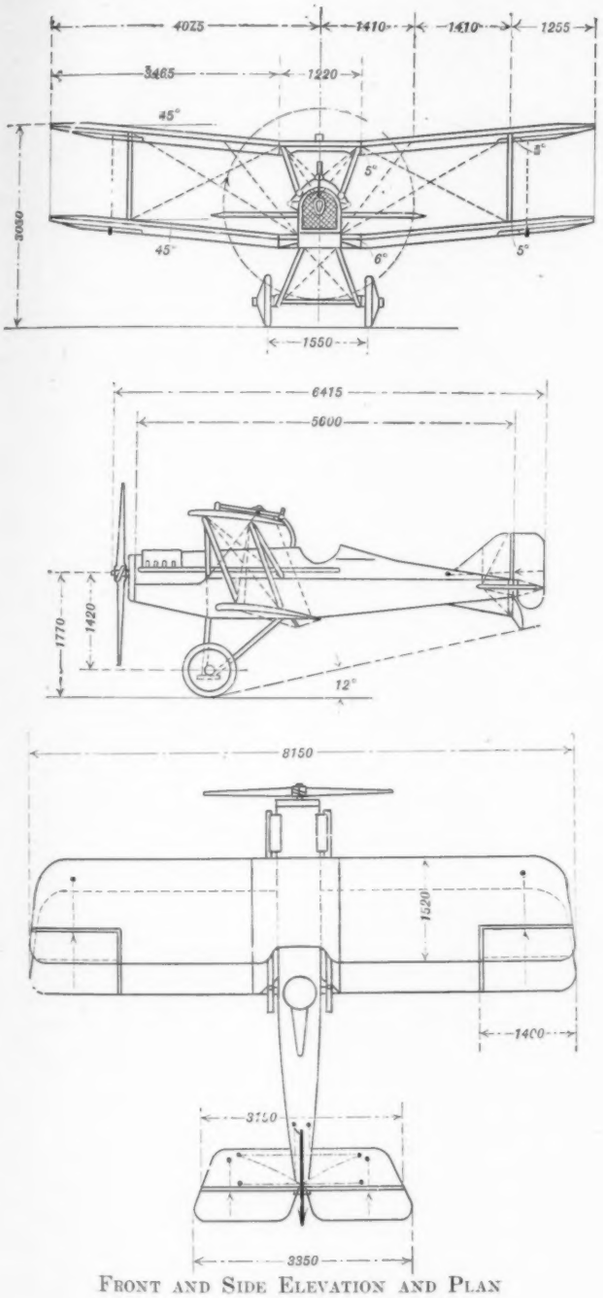

FRONT AND SIDE ELEVATION AND PLAN

The center section struts are covered steel tubes. The plane spruce struts rest in long stampings, serving as fixing points of the vertical wiring.

Profile wire is employed for the plane cross wiring with twin wires for those carrying load and single for the counter ones.

The two spars of the upper planes are strengthened further between the center section and the struts with two wires each. Unbalanced ailerons are hinged to the back crossbar of the upper and lower planes.

The body shows the usual strut-cum-wire combination, being rounded above with semi-circular frames and fairings, and having three-ply wood planking of 4 mm. thickness up to the pilot's seat. Body longitudinals and struts have sections of I-shape, except the vertical struts behind the pilot's seat, which are worked out round.

The tail-plane is a double curved aerofoil and is attached to the body so that the angle of incidence can be varied in flight within the limits + 4.5 deg. and — 3 deg. To this end the front spar is pivoted, while the rear spar, with its wiring, is fixed to a tube, arranged shiftable to the body stern posts. This tube rests with a piece of thread in a gear-nut, again resting in the stern post fixed, yet turnable.

When the nut is turned from the pilot's seat by means of wheel and cable, the tube is displaced upwards or downwards, transferring thereby the same manoeuvre on the rear spar of the tail-plane, and thus its angle of incidence changes.

The elevator hooked to the fixed tail-plane partakes in this movement. The wires for operating the elevator are led through the body and tail-plane, which certainly saves air resistance, yet makes twice a 20 deg. direction change of each wire necessary. Main and tail-planes are equipped with cellon



FRONT AND REAR WING SPAR

windows, rendering inspection of the pulleys possible.

The under-carriage is of the usual V-type. The through-running axle rests between two auxiliary ones. There is no limit to the springing range.

The tail skid shows an unusual construction, being arranged turnable behind the stern post and connected with the rudder cable by intermediance of springs. A brass skid bow is sprung

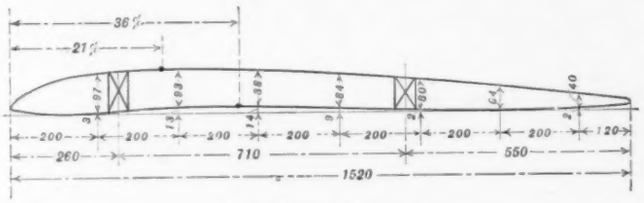

THE WING SECTION

by means of two spiral pressure springs which are prevented from turning sideway by inserted telescope tubes.

According to the firm's performance plate the Wolseley-Hispano-Suiza engine gave on 30th August, 1917, on brake 206 hp. = 203 P.S. at 2005 revolutions. The r.p.m. of the four-bladed airscrew is geared down in the ratio of 4 to 3. The diameter of the airscrew is 2.36 m.



THE TAIL-PLANE

The exhaust gases are led behind the pilot's seat in two tubes on each side of the body. The motor affords easy access after removing the bonnet. The radiator forms the bow of the body.

A cover arrangement makes it possible to uncover the body about half way from the pilot's seat.

The main gasoline tank, of 120 liters capacity, is placed behind the engine on the upper body longitudinals. A gravity tank of 17 liters capacity is inserted in the center section between the leading edge and the main spar. The oil tank, of a capacity of 14 liters, lies cross in the engine frame below the rear edge of the motor.

The fuel suffices for a flight of about two hours' duration.

Following instruments are arranged in the pilot's seat:—

To right: A box for the light pistols; a contact breaker for the self-starter; a contact breaker for the two magnetos; a triple led cock for the gravity and pressure petrol; a triple led cock for the hand and motor air-pump; a thermometer for the

water of the radiator; the gasoline gauge placed on the back side of the main tank, and a manometer for air-pressure.

To left: Gas lever; lever for regulation of the gas in

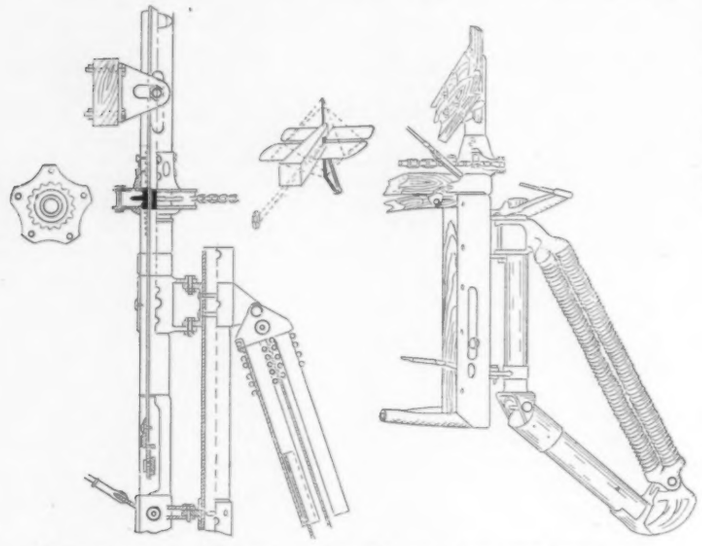

ELEVATOR AND VARIABLE TAIL-PLANE ARRANGEMENT, WITH STEERABLE TAIL SKID

altitude flights; lever for operating the radiator blinds, clip for three light cartridges. On the bottom is further arranged a hand-pump for the hydraulic machine-gun gear; two boxes for drums for the movable machine-gun and the self-starter.

A square windshield of Triplex glass is placed in front of the pilot's seat.

The fixed Vickers' machine-gun is mounted to the left of the pilot inside the body fabric. The cartridge girdle is of metal. The firing of the machine-gun takes place hydraulically by means of a control arrangement, placed in front of the engine and connected with the machine-gun through a copper main, as well as driven from the airscrew by a gear set. The firing lever is fixed on the stick.

On the bow-shaped iron band lying on the center section rests a Lewis gun, which can be pulled down during the flight to permit vertical firing.

The weight of the machine, empty, was worked out at 706 kilos, distributed as follows:

	Kg.
Engine	225.0
Exhaust collector	12.0
Self-starter	3.6
Radiator	23.8
Radiator water	31.0
Airscrew	26.6
Main gasoline tank	17.8
Gravity gasoline tank	6.5
Oil tank	3.9
Engine equipment	6.4
Body with seat and plate covers	151.0
Tail-plane incidence-change arrangement	1.9
Undercarriage	40.8
Tail skid	3.7
Pilotage arrangement	5.4
Planes with wiring	112.2
Vertical and horizontal wiring	21.0
Body equipment	14.0
	706.0

The fuel weight amounts with fully loaded tanks to 111 kilos., so that the total useful load can be calculated at 250 kilos., the total weight working thus out at 956 kilos.

The load of the planes is $\frac{956}{22.8} = 42$ kilos per square meter.

The performance load is then: $\frac{956}{200} = 4.78$ kilos per horse-power.

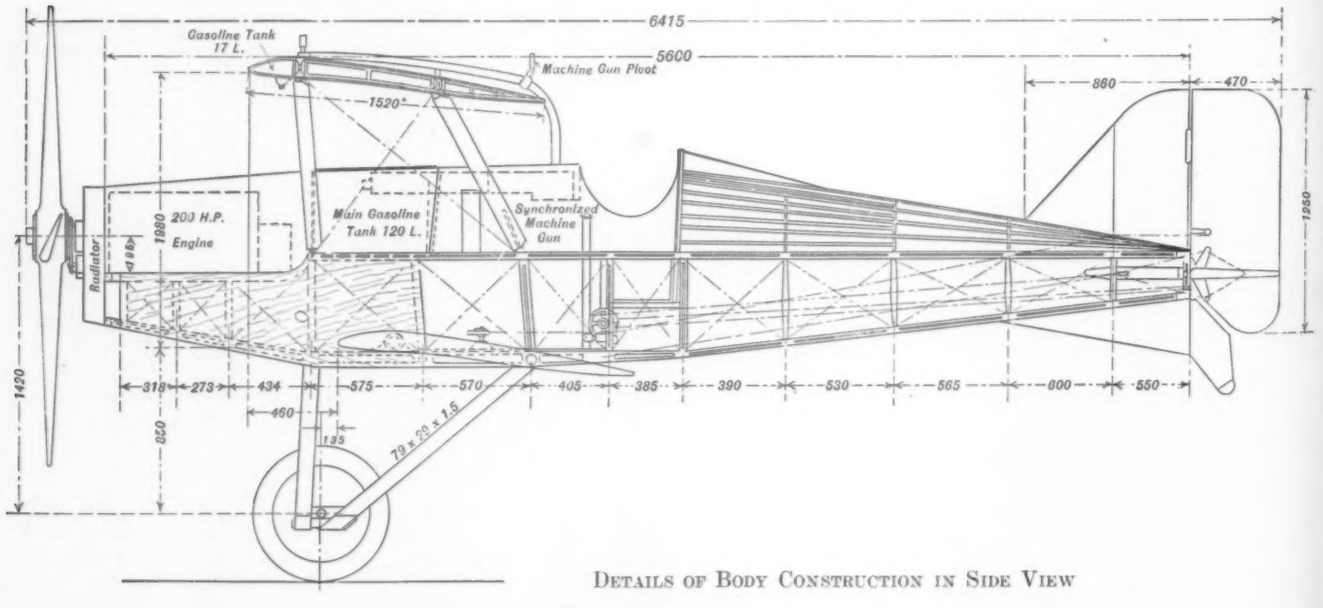

DETAILS OF BODY CONSTRUCTION IN SIDE VIEW

Aeronautical Patents

ISSUED APRIL 30, 1918

1,264,152—To Ernest G. Briggs, Brookville, Pa. Airplane.

1,264,330—To Wells M. Protzman, Osborn, Ohio. Flying machine.

1,264,331—To Wells M. Protzman, Osborn and Albert D. Ray, Cleveland, Ohio. Flying machine.

1,264,484—To Thomas P. Brooke, Chicago, Ill., assignor to The Brooke Aircraft Co., a corporation of Delaware. Wing for airplanes.

1,264,498—To James C. Foley, Seattle, Wash., assignor to Boeing Airplane Co., Seattle, Wash., a corporation of Washington. Controlling device for airplanes.

1,264,712—To Howard P. Tweed, Denver, Colo., assignor to Benjamin F. Seymoure, Denver, Colo. Aerial apparatus.

1,264,733—To Peter K. Williams, Columbus, Ohio. Aerial top.

1,264,753—To Andrew Allan, Leith, Scotland. Flying machine.

ISSUED APRIL 23, 1918

1,263,372—To Everard Richard Calthrop, London, England. Parachute.

1,263,757—To Rudolph R. Grant and Charles O. Morse, Norfolk, Va., assignors, by direct and mesne assignments, to Vernon M. Dorsey, trustee, Washington, D. C. Airplane.

1,263,758—To Rudolph R. Grant, Norfolk, Va. Landing and launching system for airplanes.

1,263,846—To Thomas P. Brooke, Chicago, Ill., assignor to The Brooke Aircraft Company, a corporation of Delaware. Flying boat.

1,264,037—To Rupert A. Emmons, Washington, D. C. Flying machine.

1,264,050—To Juseke Fuji, Fort Stanton, N. M. Parachute.

International Aircraft Standards Conference

By Coker F. Clarkson

General Manager of the Society of Automotive Engineers

The American Aircraft Commission, which spent several weeks in Europe recently in conference with engineering representatives of the Allies, on the formulation of harmonious specifications of materials and mounting and other dimensions of parts for aircraft, was constituted of three representatives from the Society of Automotive Engineers, three from the International Aircraft Standards Board, two from the United States Signal Corps, and one each from the National Advisory Committee for Aeronautics, the Bureau of Standards, the United States Navy, The American Society of Mechanical Engineers, and the American Society for Testing Materials. The request that the various societies appoint delegates having been acted upon, the whole matter was referred to the Government, and the personnel of the Commission decided upon after consultation with representatives of Governmental, manufacturing and organizing organizations.

The British Air Board (now the Air Council) had, in conjunction with the British Engineering Standards Committee (now the British Engineering Standards Association), formed a Sectional Committee to deal with the standardization of the components of aircraft and aircraft engines, and nominated several sub-committees to consider the details of the different branches of the subject. The British organization had been in communication with the French and Italian standardization committees.

The belief that the conferences just had would constitute a real advance, and facilitate ultimate international standardization, was borne out. The delegates had advisory powers only, the arrangement being that after conferring they would make recommendations to the authorities by whom they were appointed.

The members of the American Commission attended scores of sessions and conferences with their European brethren. Many aircraft and engine manufacturing plants were visited. Government factories, repair stations, laboratories and salvage depots were inspected and their methods studied. A formal International Conference was held in London, representatives of France, Italy, Great Britain and the United States being present. The general subject of cooperation of the Allied Powers, through exchange of ideas and standardization of aircraft materials, was discussed. All were in favor of a permanent aircraft standards organization representing at least five of the Allied Nations.

The following branches of the service and organizations of our Allies were represented in the conferences:

British.—Technical Department of Aircraft Production and Aeronautical Supplies of the Ministry of Munitions, the Admiralty, the National Physical Laboratory, the Aeronautical Society of Great Britain, the Society of British Aircraft Constructors, the Aircraft Steelmakers' Committee, the Technical Committee of Motor Industries, Aeronautical Inspection Directorate, Brass and Copper Tube Association, British Electrical and Allied Manufacturers' Association, British Ignition Apparatus Association, Cable Makers' Association, ball-bearing manufacturers, the Weldless Tube Association, the Irish Power Loom Manufacturers' Association, the Iron and Steel Institute, and the Steel Research committee.

French.—Section Technique de l'Aéronautique and Service de l'Aviation.

Italian.—Mission pour l'Aéronautique Militaire Italienne à l'Etranger, and Services d'Approvisionement de l'Aviation Italienne.

The prime objects of the conferences were to facilitate the sending of most usable supplies to England, France and Italy from the United States and to settle mutually satisfactory standards and specifications; to make parts, fittings and instruments interchangeable on aircraft produced in the different countries.

England and France and Italy, during the past three years, have worked with an energy never before equalled, and have made tremendous strides in aircraft design and production. The members of the American Commission were highly encouraged by what they saw. The spirit of cooperation in which they were met, the wholehearted expression of desire to work jointly to achieve the largest result toward the one thing worth considering today, were most gratifying.

The production of our Allies is now large. The work of their technical and scientific men in aircraft lines has been carried on in a very extensive and effective way.

Specifications for Steels.—Progress was made at the conferences abroad in the formulation of Allied Standard specifications for aircraft steels, using the current American, British, French and Italian specifications as a basis; covering both the general procedure for testing and the chemical and physical requirements of wrought steels.

Fabrics.—The American standard fabrics have been submitted for test, and specifications have been recommended.

Dopes.—The British specifications and methods of inspection were studied carefully. The science and economics of the manufacture of these articles are, of course, important.

Radial Bearings.—In the metric sizes the S. A. E. and the British ball-bearing series are identical, except that six S. A. E. sizes have not been included in the British list. A revision of tolerances and limits recommended by the British and the American delegates is under consideration. Limits of eccentricity in radial bearings and outside dimensions of thrust bearings were other subjects of study.

Spark Plugs.—The 18-mm. spark plug, incorporating the best features of the British and the S. A. E. plugs, has been recommended for use on American and British stationary cylinder and rotary engines. Practically the same plugs are used in France and Italy.

Magnetos.—The dimension specifications for British and for American magnetos are substantially the same, with the exception of one dimension of magneto space. The American specification of the taper as one in five is the same as the British specification of the taper as one in ten, owing to the fact that the British refer to the slope of the conical surface to the axis.

Nomenclature.—Representatives of the National Advisory Committee for Aeronautics and of the Society of Automotive Engineers are conferring with the committee of the Aeronautical Society of Great Britain on nomenclature.

Instruments.—It is necessary to standardize further the connections and attachments and also the general character of the indication of instruments.

International Unification of Units of Measurements.—The plan, provisionally adopted by the sub-committee of the International Commission on Pipe Threads, which met in Paris, July, 1914, for a standard method of designating units of construction, was discussed, with reference particularly to screw threads and gear-wheel teeth, the idea being to seek a unit which could be used when either the inch or the metric system is employed. Taking screw threads as an illustration, a system of notation was outlined by which each screw would bear a distinctive number based on the diameter in eighths of an inch, and the pitch in the number of threads per inch or per 127 mm. (which equal five inches), without reference to the unit in which the measurement might be made. For example, a ¾-in. U. S. standard bolt having 10 threads per inch would be designated a "6 x 50" bolt in countries using the metric system. The selection 127 mm. as the length over which the number of threads should be stated in countries using the metric system is based on the fact that this gives *whole* number of turns, these being five times the number of threads per inch.

The very difficult problem of bringing together the advocates of the metric and of the inch bases is in abeyance, but it is felt by some that the plan outlined above may afford the first step.

Plywood and Cements.—The British specifications for plywood and for casein cement were discussed in detail.

Glue.—The practices in the preparation and use of glue are much the same in the United States and Great Britain. Mechanical methods of application and electrical methods of heating are used largely here, but neither of these methods is common in England. Comparative tests of British and American methods of testing glue are being made.

Timber.—The question of spruce supply was naturally discussed. Kiln procedure has been simplified, the results being satisfactory almost invariably. It is appreciated by all that the splicing of wood is an important subject. Additional

approved designs of laminated and box spars will be recommended.

Structural Tubing.—The possibilities of further development in the methods of drawing and heat treating tubing are being studied, with promise of marked improvement.

Lubricating Oil and Gasoline.—The gasoline and lubricating oil questions require continued attention, to assure adequate supplies of proper quality. Compounded oils will be furnished where required, as well as grades of gasolines of proper homogeneity and low end-point.

Propeller Hubs and Fittings.—Propeller hub and fittings practice will be further unified so far as shall prove advisable and possible.

Water and Fuel Piping.—Coordination of water and fuel piping standards is largely dependant on thread practice. The use of outside dimension only for nominal diameters of metal tubing has been recommended by the British and the American Committees.

Electrical Apparatus.—The practice in electrical apparatus peculiar to aircraft, such as signal lights, radio, generators, batteries, heating and protective devices, is under consideration in view of more extensive use.

Wheels and Tires.—The British and American practice in wheels and tires are substantially in accord. Discussion is being had as to the advisability of extending the list of wheel sizes which has been adopted here.

The number of tire sizes will be kept to the lowest possible minimum.

Steel Wire Cables.—The British and the American steel wire cables are sufficiently alike to be practically interchangeable. The same thing is true of high-tension steel wire.

Turnbuckles.—It is felt that similarity of design is not necessary in turnbuckles, satisfactory interchangeability being securable if the fork-end and pin dimensions are standardized.

Gasoline Rubber Tubing.—Comparative tests are being made of gasoline rubber tubing made to British and to United States specifications.

Installation of Apparatus.—Standardization will be effected so far as possible in the location, mounting, size, and indication of direction and method of operation of instruments and apparatus.

The Work in Hand.—The single aim in considering the various matters is to ascertain to what extent we can, without interfering with our productive capacity, adopt European standards with advantage; to what extent we can assist more effectively in cases of European conformity with our practices; following the course that will bring the best results. That which does not contribute to the winning of the war is of quite secondary importance. Anything that does contribute to the winning of the war is obviously of prime importance.

As was pointed out by Winston Churchill, British Minister of Munitions, at the Inter-Allied Aircraft Conference, the detailed standardization of aircraft materials among the Allied Powers now fighting the Germans, is based on principles so obvious that they really do not require emphasis; the principle of a common front, of the freest possible communication, a lateral communication, between all parts of the front, of common reserves, upon which all can draw at any moment, of interchangeability of troops and of materials of all kinds at any moment—these are clearly steps which enable us, although we consist of many nations, fighting for a common cause, to realize day by day and week by week the continuous approach toward complete unity of action and all the efficiency and integrity of action which come from a simple purpose and a single system.

Aliens in American Factories

Industry faces a difficult problem in the unfriendly employe, which, according to the Man-Power Engineering Service of the National Americanization Committee, can be solved by the following method:

First of all take a census of all employes and divide them into four classes: native born, naturalized citizens, friendly aliens, alien enemies. If they are naturalized citizens of enemy alien descent they had better be classed industrially with alien enemies until something of their history and record is known. A man born on another soil has to *prove* himself for America. A certificate of naturalization granted under our inadequate requirements, where often a job is the goal, is not enough to class him with a native American.

Second.—Make an analysis or a map of your plant, showing its vulnerable spots. Where will a fire do the greatest damage, where is waste accumulated, what hydrant is most vital in extinguishing a fire, where is the control of your lighting system, where will an explosion cause the most damage, what machines are most vital or difficult to replace, where can goods in transit be tampered with easiest? A dozen other questions will suggest themselves.

Find out what kind of workmen are in charge of these vulnerable points. If they are enemy aliens, transfer them at once. Don't wait to have them prove their loyalty. Some other point in the factory will not decrease their efficiency and it may increase safety. The fire-brigade and the man who can reach the hydrant the quickest ought to be loyal American workmen—just as men in the boiler-room and at delicate machines should also be. What do you know about these men?

Surveillance and guards and sentinels are the next most important considerations. Their number and location should be determined by the numbers and location of alien enemies and persons of doubtful loyalty, and by the strategic points to be guarded. *Both systems are necessary*—one for men; the other for places. They check each other and insure safety. With only one method there will at various times be exposed points. One agent may be diverted but two or more are difficult to divert simultaneously.

When fences are put up and windows barred and guards established, do you consult the factory plan to see that every vulnerable part is included or do you follow the example of one concern in New England and leave the transformer out in a field, fifty feet outside of the fence, where an enemy with a tin can of powder could paralyze the plant? Safeguarding is a job of engineering—not a make-shift job that anyone can do. It would be interesting for each industrial leader to find out who handled this work in his own plant.

Lighting is an important essential. Every possible improvement should be made; vulnerable points should be especially well-lighted. *Keep alien enemies and persons of doubtful loyalty in the light all of the time.*

Keep outsiders out. This is no time for outsiders or persons without official authority or business in war plants. Verify credentials of visitors. When they get in, see that they go only to the place they are supposed to go. Don't send them alone. Escort them in, stay with them, and escort them out, or supply them with a "guide" who will do so.

One way to keep outsiders out is to reduce the labor turnover. Every time a new man is taken on who is not known, it increases the risk.

Ask every new employe if he has a registration card. If manufacturing war supplies try to get every alien enemy out—not by throwing him out, but by exchanging with some industry that is not manufacturing war supplies. A man discharged because he is an alien may go to another plant in bitterness of spirit and wreck it for no reason than to get even with his first employer.

Permits should be required by employes to go to different parts of the plant. A general tag is not sufficient.

Appoint some employe as an aliens captain in the plant and give him a committee if it is advisable. It will become his business to spot anti-American propaganda and sentiment, to make such plans and maps as have been suggested, to supervise registration, recommend transfers and command the guards and sentinels. Call him by any preferred name, but give him the whole job of looking after the safety of the plant from the man-power end.

Take a personal interest in the alien. If it is necessary, set up an information bureau to help him understand drafts and regulations and registration. If he wants to learn English and become a citizen, help him do so. See that he gets American information on bulletin-boards, in pay envelopes and otherwise, to offset the anti-American material sent him or told him. (Over 140,000 sets of civic lessons in foreign languages have already been handled by industries through pay envelopes.)

The American Government cannot protect the plant that will not protect itself, and the invisible war being carried on in American industries must be won by American manufacturers or the visible war in Europe will be lost.

Official Description of the Liberty Engine

The first official description of the Liberty aero-engine was issued on May 15 by the War Department, after many fanciful reports as to its characteristics had generally gained credence.

The official statement makes highly interesting reading on several accounts as one is able to judge that the Liberty engine does not embody any revolutionary feature in either method of construction or operation. This will tend to increase general confidence, for whatever failings this engine may still display, are a matter of detail which should not prove difficult to straighten out in the necessary process of "tuning up."

It is highly proper that official credit is at last given to the engineers who have been principally responsible for the design of the Liberty engine, for once the War Department has departed from its customary policy of secretiveness in telling the public about our military preparations. While one fully realizes the value of this policy in certain specific cases where information may prove of value to the enemy, no harm may be expected from the publishing of details of the Liberty engine, since it follows well known engineering standards, while on the other hand it will go a long way to quiet sundry rumor mongers and afford the technical man and thereby the public the conviction that nothing is fundamentally wrong with the Liberty engine.

The Official Description

Here is the statement prepared by the War Department:

The designs of the parts of the Liberty engine were based on the following:

Cylinders: The designers of the cylinders for the Liberty engine followed the practice used in the German Mercedes, English Rolls Royce, French Lorraine-Dietrich, and Italian Isotta-Fraschini, before the war and during the war. The cylinders are made of steel inner shells surrounded by pressed steel water jackets, a method of applying which the Packard Motor Car Co., by long experiment, had developed. The valve cages are drop forgings welded into the cylinder head. The principal departure from European practice is in the location of the holding-down flange, which is several inches above the mouth of the cylinder, and the unique method of manufacture evolved by the Ford Co. The output is now approximately seventeen hundred cylinder forgings per day.

Cam Shaft and Valve Mechanism Above Cylinder Heads: The design is based on the Mercedes, but was improved for automatic lubrication without wasting oil, by the Packard Co.

Cam Shaft Drive: The cam shaft drive was copied almost entirely from the Hall-Scott motor; in fact, several of the gears used in the first sample engines were supplied by the Hall-Scott Motor Car Co. This type of drive is used in the Mercedes, Hispano-Suiza and other engines.

Angle Between Cylinders: In the Liberty engine the included angle between the cylinders is 45 deg.; in all other existing twelve-cylinder engines it is 60 deg. This feature is new with the Liberty engine, and was adopted for the purpose of bringing each row of cylinders nearer the vertical and closer together, so as to save width and head resistance. By the narrow angle greater strength is given to the crank case and vibration is reduced.

Electric Generator and Ignition: A Delco ignition system is used. It was especially designed for the Liberty engine to save weight and to meet the special conditions due to firing twelve cylinders with an included angle of 45 deg.

Pistons: The pistons of the Liberty engine are of Hall-Scott design.

Connecting Rods: Forked or straddle-type connecting rods, first used on the French DeDion car, and on the Cadillac motor car in this country, are used.

Crank Shaft: Crank shaft design followed the standard twelve cylinder practice, except as to oiling. Crank case follows standard practice. The 45-deg. angle and the flange location on the cylinders made possible a very strong box section.

Lubrication: The first system of lubrication followed the German practice of using one pump to keep the crank case empty, delivering into an outside reservoir, and another pump to force oil under pressure to the main crank shaft bearings. This lubrication system also followed the German practice in allowing the overflow in the main bearings to travel out the face of the crank cheeks to a scupper which collected this excess for crank pin lubrication. This is very economical in the use of oil and is still the standard German practice.

The present system is similar to the first practice, except that the oil, while under pressure, is not only fed to main bearings but through holes inside of crank cheeks to crank pin, instead of feeding to these crank pins through scuppers. The difference between the two oiling systems consists of carrying oil for the crank pins through a hole inside the crank cheek instead of up the outside face of the crank cheek.

Propeller Hub: The Hall-Scott propeller-hub design was adapted to the power of the Liberty engine.

Water Pump: The Packard type of water pump was adapted to the Liberty engine.

Carburetor: A carburetor was developed by the Zenith Co. for the Liberty engine.

Bore and Stroke: The bore and stroke of the Liberty engine is 5x7 in., the same as in the Hall-Scott A-5, A-7, and twelve-cylinder engines.

Remarks: The idea of developing Liberty engines of four, six, eight and twelve cylinders with the above characteristics was first thought of about May 25, 1917. The idea was developed in conference with representatives of the British and French Missions, May 28 to June 1, and was submitted in the form of sketches at a joint meeting of the Aircraft Board and the Joint Army and Navy Technical Board, June 4. The first sample was an eight-cylinder model, delivered to the Bureau of Standards, July 3, 1917. The eight-cylinder model, however, was never put into production, as advices from France indicated that demands for increased power would make the eight-cylinder obsolete before it could be produced.

Work was then concentrated on the twelve-cylinder engine and one of the experimental engines passed the fifty-hour test Aug. 25, 1917.

After the preliminary drawings were made, engineers from the leading engine builders were brought to the Bureau of Standards, where they inspected the new designs and made suggestions, most of which were incorporated in the final design. At the same time, expert production men were making suggestions that would facilitate production.

The Liberty twelve-cylinder engine passed the fifty-hour test, showing, as the official report of Aug. 25, 1917, records "that the fundamental construction is such that very satisfactory service with a long life and high order of efficiency will be given by this power plant, and that the design has passed from the experimental stage into the field of proven engines."

An engine committee was organized informally, consisting of the engineers and production managers of the Packard, Ford, Cadillac, Lincoln, Marmon and Trego companies. This committee met at frequent intervals, and it is to this group of men that the final development of the Liberty engine is largely due.

In addition to the above facts, credit might properly be given to Mr. Hunt for the development of the water-jacket system for the Packard aero-engine, and to the Hall-Scott company for the crankshafts, since the dies for the four- and six-cylinder Hall-Scott engines were later reworked for the eight- and twelve-cylinder Liberty engines, respectively. It may also be added that the Hall-Scott company had completed four-, six-, eight- and twelve-interchangeable cylinder engines before the Liberty design was started.

While it is not generally known that four- and six-cylinder Liberty engines were designed, the fact appears that they were not only designed but actually made.

Signal Corps Air Section Needs 10,000 Mechanics

Call has been issued for ten thousand machinists, mechanics, chauffeurs and other skilled workmen needed at once by the aviation section of the Signal Corps, it was stated, and announcement was made that additional increments must be obtained from the same classes in the near future.

The degree to which the aviation program of the army depends upon highly skilled labor is shown by the statement that "ninety-eight of every hundred men in the aviation section must be skilled in some branch of work."

"Men registered in the draft," said the announcement, "may be induced into this service by applying to their local draft board. Men not registered may enlist at any recruiting office. Further information may be had by applying to the air division, personnel department, Washington, D. C.

Curtiss Again

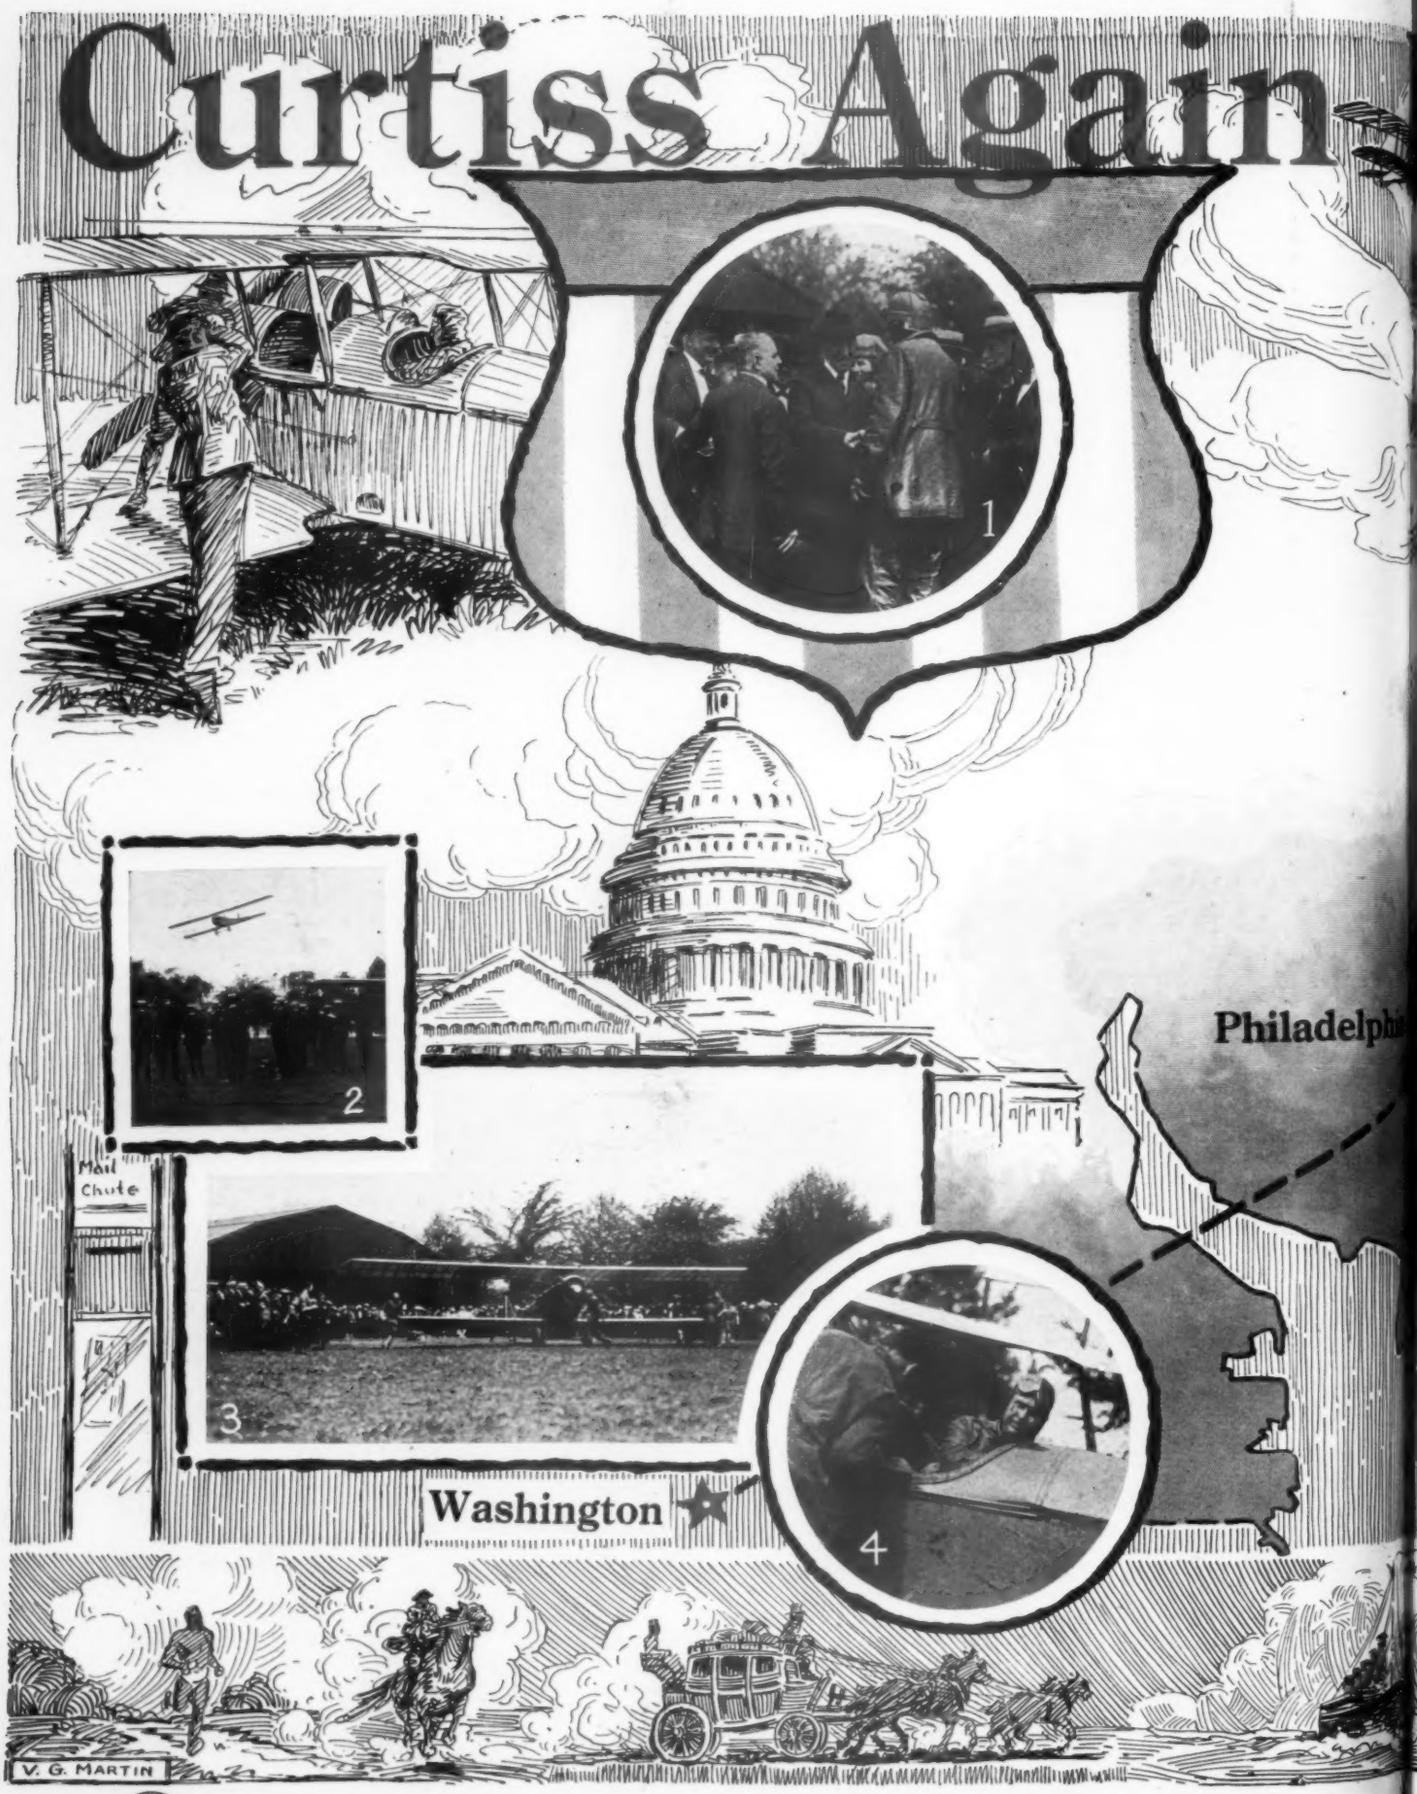

The first regular aerial mail service between New York and Washington was started May 15th, 1918. Curtiss machines were used.

Lieutenant George L. Boyle left Washington in first Curtiss mailplane with Postmaster-General Burleson's official opening letter; President Wilson cancelled and autographed aeromail stamp.

Lieutenant Howard P. Culver took Boyle cargo, Philadelphia to New York, in one hour, ten minutes. Mail, Lieutenant Torrey H. Webb carried from New York to Philadelphia, reached capital in Lieutenant James C. Edgerton's plane three hours, twenty minutes later. Flying time, Washington to New York, since reduced to two hours, 50 minutes.

Aerial postal service in U. S. first started by Postmaster-General Hitchcock in 1911, flying in Curtiss biplane, Nassau to Mineola, L. I. In 1912, Mr Hitchcock licensed ten Curtiss flyers to carry mail; tests then made in New York, Georgia, Texas, Arkansas, North Carolina. Hugh Robinson, Curtiss pilot, delivered mail along Mississippi River from Minneapolis, 375 miles.

1. The President and Mrs. Wilson, Postmaster-General

NOTE: Photos Nos. 1, 2, 4, 5, 6, 7 are copyrighted International Film Service.

Makes History

on, Cabinet members, and other officials bidding nant Boyle good luck on the initial mail trip from ngton to New York.
e first plane piloted by Lieutenant Edgerton arrived shington at 2:50 p.m., flying 133 miles from Philae in one hour and 26 minutes.
e start of the first aerial mail service from Potomac Washington.
utenant Edgerton arrives in Washington with the ail from Philadelphia.
utenant Webb leaving Belmont Park on the first trip of the New York-Washington Aerial Mail Route.

6. Lieutenant Culver handing his bag of mail over to New York Post Office officials after flight from Philadelphia to Belmont Park, New York.
7. Lieutenant Henri Farre, official aviation artists of the French government, presents Lieutenant Webb with a good luck horse-shoe, just before the inaugurating flight.
8. Postmaster Patton of New York, Aero Club, and City Officials wishing Lieutenant Webb Godspeed.
9. A close-up of one of the Curtiss machines made for Aerial Mail Service, showing mail-carrying compartment.

is copyrighted Cline inst Studio. Photo No. 8 is copyrighted Central News Photo.

The 1917 Fokker Triplane

The following report has been issued by the British Air Ministry on the Fokker triplane, which was briefly described in the last issue of AVIATION. A fuller report may be issued in the near future, if further inquiry shows that the machine has features of interest. At present, however, the Fokker appears to be one of the poorest of modern German designs.

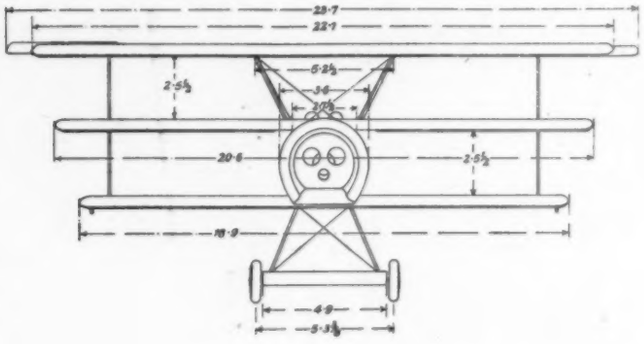

FIG. 1

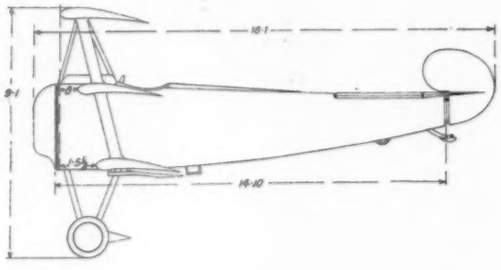

FIG. 2

General Description.—As regards outline design, the machine is somewhat similar to the Sopwith triplane and is in general of orthodox type.

The chief point which arises from a preliminary e amination is the absence of external bracing wires. This point will be dealt with later.

Constructional Design.—It is from this standpoint, probably, that the machine is of greatest interest. The designer appears to have made every effort to reduce head resistance, even at the expense of increase in weight. In some respects, also, his efforts have tended to grave structural weakness.

Wing Structure.—The unique "twin" spar is shown in Fig. 3. It consists of two box-section tapering spars joined by transverse ply-wood. As far as can be gathered at present, the fore and aft shear strength of this built-up member is supplied by one port and one starboard bulkhead of ply-wood in each plane. This appears quite inadequate, especially in a high-speed machine, even if we disregard the possibility of buckling of the laterally unstabilized ply-wood in nose-diving.

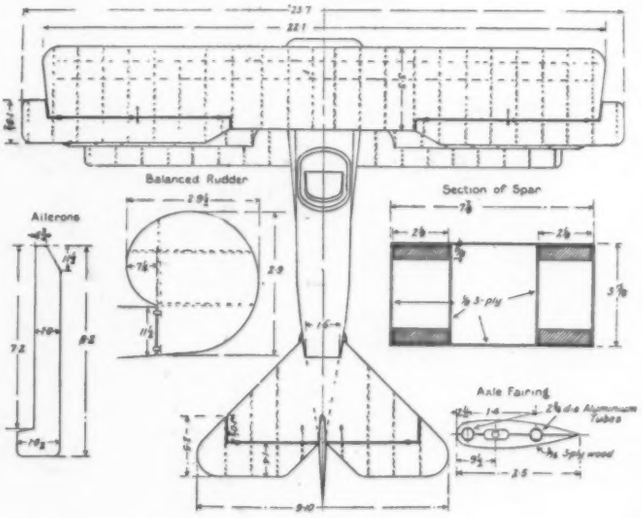

FIG. 3

Apart from this point, the internal wing structure presents no peculiarities. From the front spar to the leading edge, the upper surface is stiffened with ply-wood as is usual on many modern scouts.

The nature of the main cellule structure is a typical example of the high price paid for reduction of resistance. Interplane wiring is dispensed with, and structurally the main frame may be regarded as three pairs of cantilevers, tied by pseudo-struts near the wing tips.

On a machine of relatively short span this cantilever construction may be rendered possible by the use of spars of great depth, and the ply-wood box type employed meet this condition, owing to the abnormally high thickness-chord ratio of the aerofoil section. It is questionable whether the gain in overall efficiency by deletion of bracing wires is sufficient to balance the loss due to the use of a "high lift" section; this question naturally becomes more acute at high speeds, especially when the altitude is not approaching the ceiling; it is also rendered acute by the abnormally small gap-chord ratio employed.

The function of the interplane "struts" appears to be that of ties which partially distribute the load from plane to plane. Their section is such that they can hardly be expected to withstand reverse loading, and it is thought that this fact may be one explanation of the bad name which the Fokker has earned by breakage in the air.

Tail Unit Structure.—Here again we find that reduction of resistance has been attained by deletion of external bracing. In this case, however, the tail unit being largely of tubular construction the cantilever structure, beside being heavy, is very weak. The proportions of the framework are approximately such as obtain on most normally-braced frame works, and once more an explanation suggests itself for the structural failures experienced on this type.

Body Structure.—The framework of the body is built up from steel tubing butt-welded at the joints. The standard wiring attachments consist of a short length of small tubing bent to the form of a quadrant or semi-circle (as required), and welded into the corners of cellules (see Fig. 5). The bracing wires are looped round these attachments, doubling back upon themselves, thus functioning as a single wire of double length. Splices are dispensed with, but beyond that nothing good can be seen in this method of wiring, which is heavy and very weak, as its "fixing strength" is that of a wire doubled round a small diameter pin in place of twice that strength as is obtained by splicing.

The use of welding in the building up of the body also appears to be a weak feature. Vibration and reversal of stress cannot be taken adequately by such a structure. The corner attachments are somewhat reminiscent of the well-known Short U-bolt. The U-bolt had the standardization advantages of the Fokker fitting, and, in addition, without further sacrifice in weight, was a far more reliable and robust wiring attachment.

Summary of Constructional Criticism.—On broad lines little good can be said of the Fokker structure. The designer appears to have employed considerable ingenuity (or exhibited considerable mental slackness) in devising schemes whereby slight increase of manufacturing speed has been purchased at the price of grave structural weakness or increased weight.

Where speed of production has not tempted him, his aim has been reduction of resistance. Here also, strength—and above all, permanence of structural rigidity—has been disregarded, and yet it is hard to see what notable gain of "fineness" has been attained.

Wing Tip Skids.—These are rigidly-fixed ash skids located



FIG. 4

under the wing struts. The reason for fitting them is obscure, as they can only come into play as a result of an appallingly poor landing, and if they did come into play, would certainly buckle the flimsy interplane struts.

Aerodynamical Features.—Certain of these features have been mentioned already. In this respect also, the design shows evidence that it has been carried out hastily and in a slovenly manner. There are signs of considerable ingenuity, but they are often marred by lack of broad consideration.

Wing Design.—Here, for instance, we have the elimination of external wiring. The "wireless" machine is not a new idea; many constructors have realized its good points—namely, the saving of wire resistance, and the diminution of tuning-up troubles. The Fokker designer has missed the counterbalancing defects, and his method of attack has led him into two grave faults. In the first place, the cantilever construction adopted is not only weak, but essentially non-rigid. The deformation under maneuvering stresses and the consequent variations of aerodynamical load-distribution would appear to render the problem of controllability curiously complicated.

Further, the high cambered section of the aerofoils cannot but counteract the slight advantage due to the saving of wire resistance. Experience has shown that "low lift" aerofoils cannot be beaten for use on scouts, and that whatever advantage in climb and altitude-flying capacity may be attained by the use of "high lift" sections is canceled and far more than canceled by the excessive horsepower required at fine angles of attack. When one considers the triplane effect (especially on small gap) which must, from first principles, obtain with such a deeply-cambered section the inefficiency of the main planes becomes evident.

Fig. 4 shows the amazing contrast between the Fokker section (full line) and R. A. F. 15 (dotted line), which may be taken as typical of British practice for similar machines.

Controls.—All control surfaces are balanced, but the method of balancing is inferior to that employed on the Albatros.

Ailerons are fitted to the top plane only, a type of construction which has been shown to be inefficient.

Engine.—The machine exhibited in the Aircraft View Rooms in London has no engine, but information received from over-

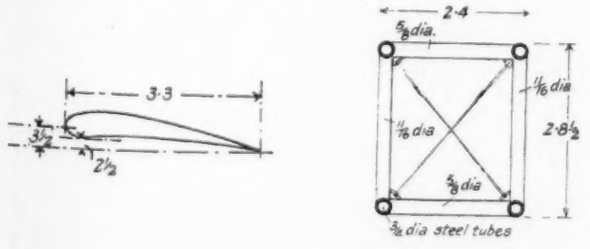

FIG. 5

seas states that the engine is an Oberursel, very similar to the 110 h.p. Le Rhône. In fact, it is understood the only differences are slight points of detail design and the relative poverty of general finish. For instance, the nose piece is in two portions, the propeller shaft being separate from and bolted to the front plate of the engine.

The carbureter is a French-made Tampier bloctube, presumably obtained from a captured machine.

The oil pump appears to be a German copy of the standard Le Rhône oil pump. The magneto is a Bosch.

Armament.—Two Spandau guns are fitted, firing forward through the propeller, and fitted with synchronizing gear of the direct flexible drive type, a pinion on the flex shafting engaging with the gear wheel which meshes with the magneto and oil pump drives.

The guns are controlled by Bowden wires, from thumb-pushes on the control lever. Three pushes are fitted, two for firing the guns independently and the third for simultaneous control.

Identification Marks.
R.F.C. No. G.125.
Maker No. 1856.
Military No. FOK. D.R.I. 144/17.
Date of construction, Nov. 20, 1917.

Weights (as stenciled on Machine).

Weight, empty	376 kg. =	829 lbs.
Permissible load (including fuel)	195 kg. =	430 lbs.
Total weight	571 kg. =	1,259 lbs.

Weight of Engine.
334 lbs., including hub, magneto, oil pump and carburetor. (NOTE.—Weight of 110-h.p. Le Rhône is 330 lbs.).

Tank Capacity.
Petrol, 16 gallons } approximate.
Oil, 4 gallons }
(approximate duration—2½ hours at 10,000 ft.)

From the above it is possible to construct the following approximate weight analysis:
Fuel, oil and tank, 170 lbs. (allowing tank 18 lbs.).
Crew, 180 lbs.
Military load, 98 lbs.
Engine and propeller, 358 lbs. (allowing propeller 24 lbs.).
Structure, 453 lbs. (including engine bearers and instruments).
Structure percentage, 36.
Surface of main planes—205 sq. ft. (approximately).
Estimated B.H.P. (by analogy with 110-hp. Le Rhône)—113
lbs. per sq. foot—6.14.
lbs. per B.H.P.—11.15.

Flying Through Clouds

When flying in a cloud which obscures the horizon, says *Flight*, it is very difficult for a pilot to tell whether or not his machine is on an even keel. It is true that he will be able to tell from his speed indicator whether he is flying level or along a sloping path, but if at the same time the machine is making a turn, this is difficult to "feel," as it may be very slight. The compass should, theoretically, indicate a turn, but what frequently happens is this: A machine enters a cloud and the pilot watches his compass and speed indicator to see if he is keeping on his course. He then notices that the compass needle begins to move, and rudders in the opposite direction to check the turn.

As he can see nothing except his machine, the horizon being invisible through the clouds, he is very apt to overcorrect, with the result that the machine begins to turn the other way. The rudder is then put over in the opposite direction, and very likely overcorrection again occurs. In this way the machine swerves from side to side, each turn being accompanied by a bank. If this bank becomes steep the machine will probably get her nose down and the speed indicator will register a high velocity. As the pilot may not be aware of the amount of bank, he will instinctively pull his control lever towards him in order to pull the machine out of the nose dive. If the machine is steeply banked the elevators will not "flatten out" the machine, since they are in a position somewhere near the vertical and therefore act as rudders. The compass continues to swing, and before long the pilot may not have the slightest idea of what is really happening to his machine, until he emerges from the cloud.

The French Aerial Operations in 1917

The following table, compiled by Jacques Mortane for *Aeronautics*, gives a detailed survey of the activity of the French Air Service in 1917.

	German Airplanes Brought Down				Bombing Raids (weight of bombs dropped, lbs.)	
	In the French Lines	In the German Lines	Seriously Damaged	Kite Balloons	By Day	By Night
January	7	28	20	..	.....	38,770
February	7	16	13	1	.....	67,070
March	11	38	23	..	1,580	56,500
April	14	51	85	8	880	50,130
May	18	78	118	2	17,100	167,700
June	9	52	39	4	10,000	122,360
July	8	30	40	2	17,600	127,800
August	3	53	59	4	20,660	91,130
September	7	60	80	2	64,290	302,720
October	15	27	61	3	40,600	125,160
November	2	15	17	..	20,000	16,630
Dec. (1 to 15)	16	21	28	1	41,300	47,360
Total	117	169	583	27	284,710	1,208,330

International Aircraft Standards

(Continued from previous issues)

2W2—Mill Specifications for Aircraft Spruce

TIMBER.—1. The following species of spruce may be used in aircraft construction: Sitka spruce (*Picea sitkensis*), red spruce (*Picea rubens*), white spruce (*Picea canadensis*). The trees from which the logs are cut shall be in a healthy condition at the time of felling.

LOGS.—2. The logs from which the lumber is produced shall be freshly cut. No logs shall be used which have been allowed to stain or decay.

GRAIN.—3. The grain shall be straight; that is, the angle of deviation from a line parallel to the edges shall not exceed 1 in 30 (1:30) on surfaces with the diagonal grain and 1 in 20 (1:20) on surfaces with spiral grain. Stock 4 inches and thicker may be flat grain; stock less than 4 inches thick shall be vertical grain.

TEXTURE.—4. (*a*). The wood shall be strong, tough, and elastic. Brashy pieces will not be accepted.

(*b*) The rate of growth of any piece shall not be less than 18 annual rings to each 3 inches (76.2 mm.) (an average of 6 rings to the inch (25.4 mm.) when measured in a radial direction through the zone of maximum growth on either end section. Furthermore, no single inch (25.4 mm.) shall have less than 4 annual growth rings and not more than 10 per cent of the stock shall contain less than 8 rings per inch (25.4 mm.).

KNOTS AND BURLS.—5. (*a*) At least 75 per cent of the total footage of each shipment shall be free from knots and from burly, curly, gnarly, and irregular grain on all four sides of each piece.

(*b*) In the pieces comprising the balance of the shipment (25 per cent or less) knots and burls, or small irregularities of grain and other defects will be allowed, provided that the buyer is able to obtain from each piece clear, sound, straight-grained cuttings over 10 feet (3.05 m.) in length and not less than 4 inches (101.6 mm.) wide, by sawing out and discarding not more than 25 per cent of the total volume of the piece.

PITCH POCKETS.—6. (*a*) One pitch seam or pocket less than 2 inches (50.8 mm.) long or its equivalent in minor pockets (provided they are not in the same annual ring) will be allowed on any face or on any two opposite faces of each piece 16 to 31 feet (4.88 to 9.45 m.) long. Two pockets or their equivalent on any face or on any two opposite faces of each piece over 32 feet (9.75 m.) long. Pieces shorter than 16 feet (4.88 m.) and pieces narrower than 6 inches (152.4 mm.) shall be free from pitch pockets.

(b) When the number and size of pitch pockets exceed the limits stated in paragraph 6 (*a*) the provisions of paragraph 5 (*a*) shall govern.

SAP.—7. Bright sap shall not constitute more than one-fourth the width of a piece nor more than one-third of its length.

ROT AND SHAKE.—8. All pieces shall be free from shake, rot, dote, and all other forms of decay.

TOOL MARKS AND OTHER DEFECTS.—9. Pieces must be free from picaroon holes, hook marks, and other defects caused by handling tools and equipment.

WANE.—10. Wane will be allowed on occasional pieces, but in no case shall it exceed either one-fourth the thickness, one-eighth the width, or one-sixth the length of the piece.

DIMENSIONS.—11. Percentages of various thicknesses, widths, and lengths, and the respective percentages of flat and vertical grain stock to be supplied are subject to special arrangement between purchaser and contractor at the time prices are fixed.

TOLERANCES.—12. (*a*) Thicknesses may be scant, not to exceed one-eighth inch (3.18 mm.) on occasional pieces. If more than one-eighth inch (3.18 mm.) scant, they will be accepted at seller's option and tallied in the next inch class below.

(*b*) Widths may be scant not to exceed one-fourth inch (6.35 mm.) on occasional pieces. If scant more than one-fourth inch (6.35 mm.), they will be accepted at seller's option and tallied in the next inch class below.

(*c*) Lengths may be scant not to exceed 2 inches (50.8 mm.) on occasional pieces. If scant more than 2 inches (50.8 mm.), they will be accepted at seller's option and tallied in the next 1-foot class below.

LOADING.—13. Shipment is to be loaded and covered in the manner prescribed by the purchaser.

2W3.—Specifications for Mahogany Lumber for Use in Propeller Construction

GENERAL.—1. (*a*) The General Specifications, 1G1, shall form, according to their applicability, a part of these specifications.

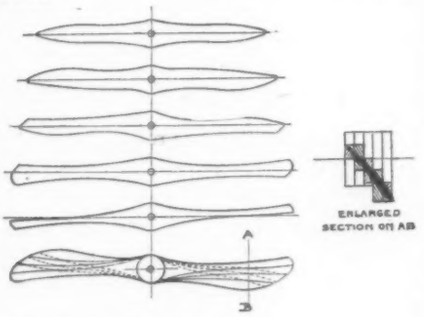

PROPELLER MADE OF FIVE LAMINATIONS —SKETCH SHOWING SHAPE OF LAMINATIONS AND METHOD OF ASSEMBLING

(*b*) This specification is drawn to govern the quality of mahogany lumber supplied for the construction of propellers.

(*c*) Only true mahogany (*Swietenia mahogoni*) or such substitutes as are expressly approved may be supplied.[1]

GRADE.—2. (*a*) Each board supplied shall yield one or more laminations free from defects (see Fig. 1), and the waste on each board shall not exceed one-third of the surface measure of the piece.

(*b*) Shipments on this specification must contain all lumber of better grade that has been produced in cutting the logs at the mill. No portion of higher grade material shall be sorted out and retained by the mill.

GRAIN.—3. All boards shall be reasonably straight grained and suitable for propeller purposes. Quarter-sawed lumber is preferred.

TEXTURE.—4. Boards containing brashy, doty, or punky wood will not be accepted.

DIMENSIONS.—5. (*a*) Unless otherwise specified in the order, dimensions shall be as follows:

(1) *Thickness.*—Rough, green lumber must be full 1 in. thick.

(2) *Width.*—No board shall be less than 8 in. wide and not more than 10 per cent of the resulting laminations shall be less than 9 in. wide nor more than 25 per cent less than 10 in. wide.

(3) *Length.*—No board shall be less than 8 ft. long and at least 80 per cent of the resulting laminations must be 9 ft. long or over.

(*b*) The widths most desired are 10 to 14 in., with the greatest percentage between 12 and 14 in.

(*c*) Lengths and widths shall be measured according to National hardwood rules.[2]

SHIPMENT.—6. Rail shipments shall be made in closed cars, protected from the weather. The lumber must be carefully piled to avoid damage in transit.

INSPECTION.—7. (*a*) The inspector shall have free access to all parts of the mills where this lumber is being manufactured, and shall be afforded every facility to satisfy himself that the lumber conforms to this specification.

(*b*) This specification shall be subject to construction and interpretation by the inspection department of the purchaser.

REFERENCES: United States Signal Corps Specifications No. 1502S-A.

---

[1] African mahogany (*Khayasenegalensis mahogoni*) is approved by the United States Signal Corps.

[2] National Hardwood Lumber Association rules, August, 1917, page 10, "Measurement": "In the measurement of lumber at random widths, fractions of over one-half foot, as shown on the board rule, must be counted up to the next higher figure; fractions of exactly one-half foot and less, as shown on the board rule, must be counted back to the next lower figure. Tapering lumber in standard lengths must be measured one-third the length of the piece from the narrow end."

Problems in Propeller Design

The National Advisory Committee for Aeronautics desires to invite the attention of all designing engineers, and particularly those interested in propeller design, to two very important problems now confronting the air services of the nation, namely, a steel air propeller and a variable pitch air propeller.

The Special Sub-committee on Engineering Problems has reported that these problems have been under consideration for some time, but so far without attaining satisfactory results.

These problems require careful mathematical study by technicians fully equipped with a sound understanding of the fundamental principles of aeronautical and structural engineering.

The ideal variable pitch propeller should embody means for changing simultaneously the diameter, area, and pitch for changes in air density. It is not necessary at design of the steel propeller follow the present practice in wooden air propellers, but after careful consideration has been given to the aerodynamical principles involved, design and experimental work should follow fundamental structural engineering practice. The development of such propeller should be coincident with the development of the variable pitch propeller.

Aeronautical engineers and other technicians are invited to give thought to this problem and submit brief descriptions of their ideas with such drawings, data, and photographs as are necessary, to the National Advisory Committee for Aeronautics, Munsey Building, Washington, D. C.

Digest of the Foreign Aeronautical Press

***Flight* (London), April 18, 1918**

The Pfalz Pursuit Biplane—Among the more recent German pursuit machines there is one which up to the present has been little known to the general public, although it is employed to a considerable extent by the enemy.

This machine, the Pfalz single-seater biplane, is chiefly

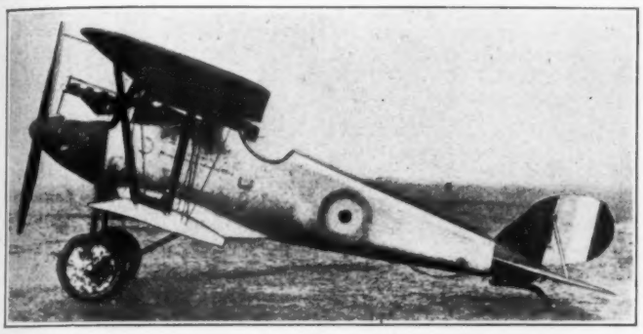

SIDE VIEW OF THE PFALZ PURSUIT BIPLANE

remarkable on account of the fact that it imitates, as do the recent Albatros pursuit machines, the wing bracing originated by the Nieuport firm, incorporating a larger top plane and a smaller lower plane.

The wing bracing differs, as regards the interplane struts, from that of the later type Albatros single-seaters in that the

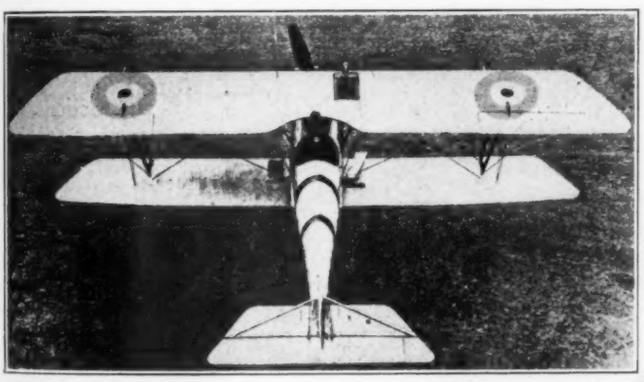

REAR VIEW FROM ABOVE OF THE PFALZ PURSUIT BIPLANE

lower ends of the struts do not meet at a point, but are connected by a short horizontal member.

The lower plane has two spars according to usual practice, although they are placed rather close together, thus forming in reality a compromise between the single-spar lower plane of small chord on the ordinary two-spar lower plane with chord equal to that of the upper plane. The latter is in one piece and is mounted on four struts sloping outward from the body.

An interesting feature of this machine is that the lower planes are attached to a short wing root which is built integrally with the body.

The body is of elliptical cross-section and is built up of two thicknesses of three-ply wood which are fixed to the body frame in the form of long, narrow strips crossing one another at right angles.

The tail plane also presents an interesting feature in that it has a flat top surface and a convex bottom surface, its setting being a zero angle of incidence. This peculiar shape of aerofoil would obviously introduce in a steep dive a depressive force on the tail, and thereby tend to automatically flatten out the machine.

The engine is a 160 hp. Mercedes, which, except for the top of the cylinders, is enclosed in a streamline cowling, and actuates a tractor screw.

***Flight* (London), April 18, 1918**

British Output of Aircraft.—Addressing the Bedford Women's Liberal Association on April 11, Mr. Kellaway, Parliamentary Secretary to the Ministry of Munitions, said that the increase for the first two months of the year, compared with the first two months of 1917, was as follows: Airplanes, 223 per cent; aero-engines, 245 per cent.

The average weekly production of airplanes for this year equalled the average production for two months in 1915, while in the case of machine guns, one week's production equalled that of five months in 1915.

***Flight* (London), April 25, 1918**

French Aviators Cross Sahara Desert.—To France again falls another pioneer achievement, the crossing of the Sahara by airplane. So far half of the desert had been conquered, but now, according to the *Echo de Paris* of April 20, the full trip across has been accomplished by three machines, which left Ouargla and arrived at Salah. The trip was completed in seven hours, with a solitary landing at Inifel.

***Flight* (London), May 9, 1918**

America's Air Fleet (*Editorial*).—It is reasonably certain that those who have criticized the delay in the American program have failed to take account of the fact that America, in common with the other Allied nations which had not made preparation for war their whole aim in times of peace, had to go through a period of organization of production before her aid could become effective.

Armies and air fleets are not created by a stroke of the pen. American industries were still intent, thirteen months ago, on peaceful industry, and even though some considerable proportion of her factories had been in whole or part engaged in the production of munitions of war for the Allies, it still has to be remembered that it was only a proportion. Great as were the supplies that came to us across the Atlantic before America herself entered the war, they were still but a fraction of the whole needed for the prosecution of the war on the modern scale.

Therefore when at last America decided that she could no longer remain out of the struggle, the first thing to be done was to organize her factories for war. We of our own experience know what it means to take all our essential industries off their legitimate work and to put them on to another class of work which entails a complete recasting of all the systems previously in use.

Apart from every other consideration, time—and a great deal of time—is necessary, because it is not enough to partially organize and endeavor to complete the process while engaged on actual production. To attempt that is to invite defeat of the whole effort from the start. It took us a full two years to effect the metamorphosis, though it is true that we labored under the handicap of having to conduct intensive war at the same time, so that for America to have practically completed her war organization within the year is something she is entitled to point to with considerable pride.

It may be that incidental mistakes, involving delay and disappointment in the full program, have been committed. Indeed, we are assured that our American friends were the first to admit that errors have been so committed, but on the other side of the ledger we think they are to be congratulated on having made as few as they have. The main point of the thing is that American help bids fair to come to the Allies in full measure just when it will be of most service to the cause of civilization.

The *Aeroplane* (London), April 3, 1918

The Bombing of the Goeben—The Admiralty has issued the following detailed report on the recent bombing of the German-Turkish battle cruiser Goeben in the Dardanelles:

Details now available of the air operations carried out at the Dardanelles against the Goeben and Breslau show that as soon as news that the vessels were out had been received early on Jan. 20 our air patrols were despatched. Twenty minutes later a message was received that Kusu and Kephalo were being shelled, and all the Greek pilots at an adjoining air station at once flew over to take part in the air operations. With the first clear light it was seen that H.M.S. Raglan had sunk at anchor and that monitor 28 was on fire amidships.

The Goeben and Breslau were then about five miles out to sea off Kusu and steering south. They were followed by our planes. Ten minutes later eight to ten machines were continuously harrying the enemy ships. This action of our

aircraft was causing the Breslau to steer a zigzag course, which brought her into one of our minefields, where she struck a mine. Very shortly afterwards she was hit by an aircraft bomb and sank. Five Turkish destroyers endeavored to reach the spot, but were driven off by two British destroyers.

Heading for the Dardanelles the Goeben struck one of our mines, and developed a list to port. Aircraft continued to bomb her while she entered the straits, and she ran aground at Nagara Burnu. Pilots who undertook a special reconnaissance reported that she looked as though aground, as she was slightly tilted up forward and a large amount of disturbed mud was seen around her. Sixty-five flights were made during the day, and a great many pilots and observers made two or three attacks on the enemy's ships.

At dawn on the following day a raid was made on the Goeben by five bombers. It began in semi-darkness and the Narrows were obscured by clouds, so that the ten heavy bombs were dropped during anti-aircraft fire in the estimated position of the Goeben and no observation could be made. At midday a bombing raid commenced in which fourteen machines took part, going up at intervals of ten minutes.

Shortly after 6 p. m. on the 21st nine machines made a night raid. Continuous anti-aircraft fire was directed on them from shore batteries and from the Goeben. Six heavy bombs were dropped on the Goeben from heights of 2500 ft. to 3000 ft. While no claim to a direct hit can be made, one explosion took place in close proximity to the two searchlights of the Goeben, which seemed to be the reason for their immediate extinction. All the machines returned safely. Fifty-one flights were made during the 24 hours, and two tons of bombs were dropped.

At 9 a. m. on the 22nd four machines made a successful raid. One made a direct hit amidships, and a volume of steam and smoke appeared directly afterwards from the ship. R.N.A.S. machines at 1.45 p. m. dropped eight bombs, which fell close to the Goeben.

In a night raid three small seaplanes all dropped bombs on her. One of these pilots dropped his bombs on or near the ship from the height of 4000 ft. On the return flight he landed midway between Lemnos and Imbros owing to engine trouble, and on his gliding to the surface six shots were fired at his machine, apparently by a submarine, when he was at a height of 600 ft. He was not molested, however, when on the water, and, although Vérey lights were fired from the seaplane and calcium flares dropped, he received no assistance during the night of the 22nd. At 5.30 a. m. on the 23rd a seaplane found and towed his machine to the mouth of Mudros Harbor, where she was brought in undamaged by a destroyer.

At midnight on the 22nd four direct hits were registered on the Goeben, and from 8 a. m. that day to 8 p. m. on the 23rd 48 flights were made, bombs weighing 56½ cwt. being dropped. Forty-six flights were carried out in the next 24 hours, and 72 cwt. of bombs were dropped on the Goeben, ships and boats round her, and on the Galata aerodrome. During the following 24 hours the flights numbered 34, and the bombs dropped weighed three tons.

Raids were continued until the 27th, but on Jan. 28 seaplanes reported that the Goeben had disappeared, and that there was no wreckage floating around the spot where she had been. A reconnaissance of the Constantinople area to locate her was made on Jan. 29. The Goeben was seen lying near the inner of the two bridges spanning the Golden Horn by the arsenal, and stretching half-way along that bridge. The largest of the arsenal dry docks was seen to be flooded and open, and the smaller dry docks contained a ship which could not be identified.

During the attack, which lasted from Jan. 20 to Jan. 29, 276 flights were made by our aircraft, and approximately 15 tons 3 cwt. of bombs were dropped, while at least 16 direct hits on the Goeben were recorded.

The Aeronautic World (Tokyo), April, 1918

The Ogawa Arrow Biplane.—The Ogawa Arrow Biplane, which is shown in plan, front and side elevation in the accompanying drawings, may be looked upon as a Japanese development of the inherently stable Dunne machine.

Like the latter, the Ogawa biplane purposes to achieve inherent stability through an exaggerated sweepback, which really takes the form of an arrow. This setting of wings is known to endow an airplane with so much inherent stability that the machine actually becomes uncapsizable, although, in direct consequence of this feature, its control is very sluggish. This lack of sensitiveness on the controls is obviously a drawback, particularly in landing, where quick response to the controls is a much greater asset than absolutely inherent stability. Sluggishness on the controls is further accentuated in the Dunne type by the absence of tail-planes, longitudinal, lateral, and transverse control being all achieved by the wing flaps, whose action may be synchronized or alternated for the purpose in view.



SIDE ELEVATION

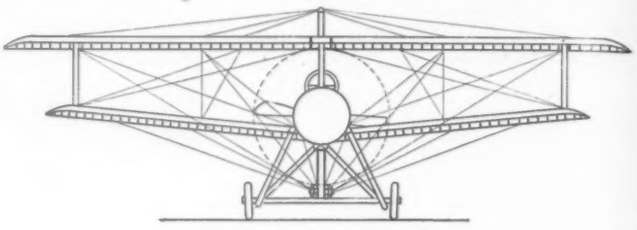

FRONT ELEVATION

The Japanese Dunne carries tail-plane and rudder, both of which are mounted on outriggers, so that this machine is controlled like an ordinary airplane. On the other hand, only the upper plane is in the shape of an arrow, while the lower plane is rectilinear. The purpose of this arrangement seems to be the combining of an inherently stable arrow plane, which is not aerodynamically very efficient, with a plane of good lift/drag characteristics which does not embody inherent stability to any extent, as far as may be judged from the accompanying drawings.

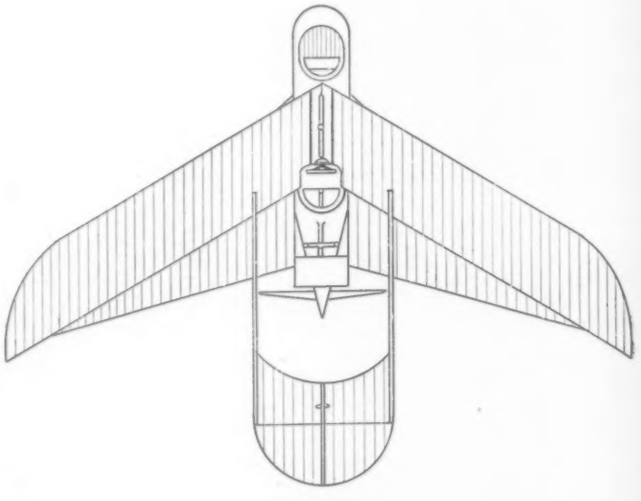

PLAN

Whatever the merit of this combination, it is at least interesting to note that after having mainly produced copies of foreign machines, Japanese airplane constructors are now beginning to develop personal conceptions in this matter. The evolution of Japanese aviation on original lines will be worth close attention, the more so as the Japanese are past masters in light wood construction, and also in view of the fact that several large industrial concerns have recently undertaken the construction of aero-engines. Among the latter may be mentioned the powerful Mitsubishi shipbuilding yards of Kobe.

News of the Fortnight

Inauguration of the Air Mail

The inauguration of the regular air mail service between Washington, D. C., and New York took place, as scheduled, on May 15.

Although no formal ceremonies attended the inauguration of the service, there was a large gathering of officials at both terminals. Among those present at the Washington terminal were the President and Mrs. Wilson, Postmaster General Burleson, Secretary of the Navy Daniels, Assistant Secretary Roosevelt, Major-Gen. W. L. Kenly, Director of Military Aeronautics, and representatives of the Aircraft Board, the National Advisory Committee for Aeronautics and the Senate and House Committees on Post Offices and Post Roads.

The machines used for this service were Curtiss biplanes fitted with 150 hp. Hispano-Suiza engines.

Since then the air mail has functioned with a sufficient regularity for so novel an undertaking to hold out favorable prospects for such additional air lines as may be organized in the future.

Two postal airplanes of a more powerful type, fitted with Liberty engines, have since been placed in service, and one of these machines flew on May 23 that day from Philadelphia to New York in 52 min., beating the best previous time by 23 min.

"The success obtained in operating the airplane mail service," said Postmaster General Burleson on May 29, "exceeds what I expected of the new route during its initial stages. The army has rendered a splendid service, which is not only a distinct contribution to the commercial world, but is proving valuable training for the aviators who are about to enter upon a greater task in France."

Billion and Quarter for Aeronautics

Nearly a billion and a quarter dollars for aeronautics is carried in the Army and Navy appropriation bills for the fiscal year ending June 30, 1919, which is now before Congress.

The Army appropriation bill provides $990,250,812.77 for the Signal Corps, including its now divorced Aviation Section. The report accompanying the bill shows that on May 16, 1918, the Signal Corps, including the Air Service, was made up of 13,343 officers and 121,746 enlisted men.

The Aviation Section of the Signal Corps, according to the testimony before Congress, is as follows: Number of officers, 12,107; number of enlisted men, 136,761; number of fliers, 4,054; number of machines in France, 1,316; number of machines in the United States, 3,760; number of combat machines in France, 323; and the number of aviation training camps in the United States, 27. It is reported to the committee that enlistments in the Aviation Section of the Signal Corps had become so rapid that the department had to put a stop order on the same. While it has been generally rumored that we had no airplanes with our forces in France, the fact is there are 1,316, of which 323 are combat or fighting machines.

In the naval bill $220,383,119 is carried for aeronautics, as passed by the Senate, while the original appropriation, as passed by the House, was $188,042,969. An appropriation of $100,000 is made for improvements to the naval air station at Pensacola, Fla., and the House appropriation of $150,000 is increased by the Senate to $200,000, for the acquirement of the remainder of Parris Island, Port Royal, S. C.

Air Service Association Is Formed

The increasing importance of the Air Services as an arm of reconnaissance and offense, and the growth of independent professional ideals and theories among the flying officers, have just been given expression in an organization known as the Air Service Association.

The purpose of this Association, as appears from its provisional constitution, is to unify all branches of the Air Service; to promote *esprit de corps;* to act as a clearing-house for ideas on mechanical improvements, method of training and aerial tactics; and to control a publication for the dissemination of news and information of benefit to the service.

The Association has been approved by Major-Gen. William L. Kenly, Director of Military Aeronautics.

The Association came into being as follows: On the evening of April 2, the officer commanding at Gerstner Field, Major M. Kirby, A. S. S. C., presided at a meeting of flying officers, who unanimously approved the suggestion put forth of forming a service association of their own along lines of similar Army and Navy organizations, and to be made up of the commissioned personnel of the Air Services.

Temporary officers were nominated and elected, and a committee appointed to draft a constitution and by-laws. This was followed on April 5 by the adoption of a temporary constitution and by-laws.

Communications have been addressed by the secretary to officers of the Army and Navy Air Services abroad, and to commanding officers of flying fields and air stations throughout the country, requesting them to bring the Association to the attention of all flying officers. The replies received indicate that officers are enthusiastically responding to the invitation to join the Association.

In July the election of permanent officers and the Board of Governors will take place, and the constitution and by-laws will be submitted to the first annual meeting for ratification or change as desired by the members.

The Air Service Association is a non-political organization, and is organized solely in the interests of the Air Services *as a whole.* Its tenets, beliefs and opinions will be expressed in the AIR SERVICE JOURNAL, which has been selected as the official journal of the Association, which will also publish such articles by members of the Association as are approved by an editorial staff to be appointed by the Board of Governors from the regular and honorary membership.

The initiation fee is ten dollars, and includes a year's subscription to the official journal of the Association. No dues will be collected.

Officers of the Army and Navy Air Services should send their applications for membership and initiation fee direct to Capt. William J. Malone, A. S. S. R. C., Secretary, A. S. A., Gerstner Field, Lake Charles, La.

Naval Aviators Wanted

The Naval Reserve Flying Corps has again been opened for applications to civilians and members of some branches of the Naval Reserve. It has been generally understood that applications from civilians would not be received, but an additional opportunity is now given to them. Applications should be addressed to Capt. Noble E. Irwin, Supervisor, Naval Reserve Flying Corps, Navy Department, Washington, D. C.

Marine Corps Enlists Aviators

A big drive is now on in recruiting men for the Aviation Section of the Marine Corps. Special efforts are being made to enlist college men and clean-cut, aggressive, quick-thinking and fearless athletes. Applicants who may have failed in regular Army and Navy Aviation will be considered.

For this purpose a personal campaign among the colleges of the country is being conducted by representatives of this Corps. They consist of privates and officers, all of whom are college men themselves. The results are very satisfactory.

Student aviators will be enlisted as gunnery sergeants and sent to the Massachusetts Institute of Technology, Cambridge, for ground work. The course there covers ten weeks. Thence they will be sent to Parris Island or some other station for training in flying. The time for this instruction has been reduced to eight weeks.

Signal Corps Wants News Photographers

A number of high-grade news photographers are urgently needed by the Signal Corps. These men must have expert experience in the handling of speed cameras such as Graflex and Graphic, and also understand speeds of lenses and various makes of cameras and operation of same.

Only those men who can furnish reference as to their actual experience as news photographers will receive consideration.

The men selected for this branch of the service will be sent to a school for military training. Upon completion of the training they will be promoted to grades of Sergeant, First Class, and will be ordered overseas in a short time.

Applicants must be citizens of the United States between the ages of 21 and 31. All communications should be addressed to Air Division, Training Branch, Photographic Section, Signal Corps, Washington, D. C.

To Protect Inventors

A bill creating a war inventions board to assist American inventors in developing devices which would be of value to the Army or Navy in winning the war is being drawn up by the American Inventors' Association of Washington, D. C., and probably will be introduced in Congress in the near future.

"The association will exert all of its energies to secure the passage of legislation creating a war inventions board to consist of five members, whose duty it shall be to seek, receive, inquire into and assist in the development of inventions of possible military value, the said board to be non-partisan and to be compensated by and under the Government," reads a statement approved at a meeting of the association on May 9.

F. J. Hemen, president of the association, said the bill probably will provide that this board shall protect the patent rights of devices laid before it, so that it will not be necessary to file the plans as public property in the Patent Office.

Wright-Martin Buys G. V. C. Plant

The Wright-Martin Aircraft Corp. has bought for more than $1,000,000 the General Vehicle Co.'s plant in Long Island City, according to press reports. The property consists of a six-story and a two-story building and other smaller structures in a plot bounded by Starr and Borden avenues and Fox and Beaver streets. It has a connection with the Long Island Railroad. It is said that the aircraft corporation has a contract to make for the Government 3,000 motors of 300 horsepower each, which it will manufacture in its new factory. Between 500 and 600 men are employed in it now, and the corporation intends to increase its force of mechanics and apprentices until it is 8,000 men, the capacity of the plant. The work of building the motors will be rushed in order to have them ready for the Government's airplane program.

Alexandria Aircraft Corp. Formed

Capt. A. W. Briggs and J. J. Rooney have resigned as general manager and chief engineer, respectively, of the Briggs Aeroplane Co., Alexandria, Va.

The business style of the company has been changed to the Alexandria Aircraft Corp. Blaine Elkins continues as president, and John W. Fenton, Jr., as secretary and treasurer. W. L. Bonney, who was purchasing agent, succeeds Captain Briggs as general manager. Webb C. Artz is business manager. The reorganization took effect on May 15. The factory of the new company remains in the old Portner brewery building, Alexandria.

On the same date the Briggs Aeroplane Co., of which Capt. A. W. Briggs is the head, was incorporated under the laws of the State of Virginia. The company has leased the Pioneer Mills property in Alexandria. To our Washington representative Captain Briggs stated on May 13 that this company plans to have its first machine ready for flight in about five weeks.

U. S. to Test Gasoline Substitute

Government tests of a gasoline substitute, which the inventor, Dr. Louis Clement, says can be manufactured for 8 cents a gallon, will be made in a few days at Pittsburgh. Gasoline substitutes presented for tests to date have fallen short of claims made by inventors, and Government experts have become skeptical that a powerful explosive gas can be made more cheaply than the gasoline refined from oil.

Fire Protection for War Plants

To minimize the possibilities of fires in munitions plants and all factories engaged on war work, the War Industries Board on April 9 created a fire protection section, which will maintain a close inspection of all plants engaged on Government work.

It will be assisted by the intelligence bureaus of the Army and Navy, and all local and district fire inspection services in the country. Where circumstances warrant, it will also enlist the aid of the fire marshals of the various States, and ask the cooperation of insurance underwriters.

Marines Can't Become J. M. A.'s

Following is a digest of a recent decision of the Judge Advocate General:

A member of the Marine Corps detached for service with the Army is not, under the national-defense act, eligible for detail in or attachment to the Aviation Section of the Signal Corps, and therefore cannot receive the rating of junior military aviator.

Newspaper Correspondent Reports on Production

David Lawrence, a Washington correspondent for the New York *Evening Post*, has recently made a survey of the production of some of the aircraft and engine factories. Among other places that he visited were Dayton, Detroit, Buffalo and Elizabeth.

At Elizabeth, Mr. Lawrence was received by Harry Bowers Mingle, president of the Standard Aircraft Corp. and the Standard Aero Corp. who is known to carefully guard as secret the important work that his plant is doing for the Government. Mr. Lawrence evidently did not obtain the basis for as good a "story" as he anticipated and "a feeling of disappointment" is reflected in his article that was published.

In this connection, Mr. Mingle has written the following letter to AVIATION AND AERONAUTICAL ENGINEERING which fully explains his position in the matter:

"We have noted the article in the New York *Evening Post* of May 23rd relative to the work being done at the Standard Airplane plant. The writer had a personal conference with Mr. Lawrence, and stated to him that in our opinion the work which we are doing here is of a confidential nature, and that to date the production of both the Standard Aircraft Corporation and the Standard Aero Corporation has been satisfactory to the Government.

"We have no apologies or explanations to make for the progress of our work and it is our belief that the results which this plant have obtained in production and in development speak for themselves, and that no statement other than this is advisable from a Government standpoint."

Aviation Fatalities Not High

The Secretary of War has authorized the following statement: The records of the Department show that from the beginning of training in June, 1917, to date the fatalities at military aviation fields in this country have been 51, viz.: 10 officers and 29 cadets killed in training flights, and 12 men killed in unauthorized flights and ground accidents.

Since the training of aviators began in this country, our student aviators have flown a total distance of considerably more than 100,000 miles. Considering the large number of men in training and the number of miles flown the fatalities have been remarkably low.

Taking into account the ordinary hazards of this occupation, the development of a comparatively new art, and the ratio of accidents in the everyday fields of endeavor, the fatality record among America's student aviators will compare favorably with those of other countries.

H. W. Johns-Manville Co. Branch to Move

The Houston, Tex., office of the H. W. Johns-Manville Co., will be located at 424 to 426 Washington Avenue, on and after July 1, 1918.

Glenn L. Martin Opens New Plant

The Glenn L. Martin Co., held a reception on May 29, the occasion being the opening of its new plant on St. Clair Ave., Cleveland, Ohio. Joseph A. Steinmetz, president of the Aero Club of Pennsylvania, addressed the invited guests.

Seaplane Emergency Ration

An emergency ration, consisting of one pound of brown bread, one pound of baked beans and one quart of water, for use on seaplanes, has been adopted by the Navy Department.

Whitman & Barnes Sales Changes

The following changes have been made in official positions in the Whitman & Barnes Mfg. Co's. sales department:

A. B. Hall, vice-president of the Whitman & Barnes Mfg. Co., will have supervision of the company's sales. He has for twenty years been connected with the company in various official capacities. His early connections were with the company's Chicago sales office as manager, which position he held until his transfer to the general office at Akron.

R. S. Carter, district representative of the company, with headquarters at Pittsburgh, has been promoted to sales manager and will have direction of twist drill and reamer sales from the Akron general office.

H. E. Fisher, formerly with the Pittsburgh Model Engine Co., Pittsburgh, Pa., has become associated with the Whitman & Barnes Mfg. Co., Akron, Ohio. He succeeds R. S. Carter as mechanical engineer and will have charge of sales in the Pittsburgh district.

Paul E. Thomas of Chicago, for years in the railroad circles in the traffic department of the Seaboard Air Lines has become connected with the Whitman & Barnes Mfg. Co., Akron.

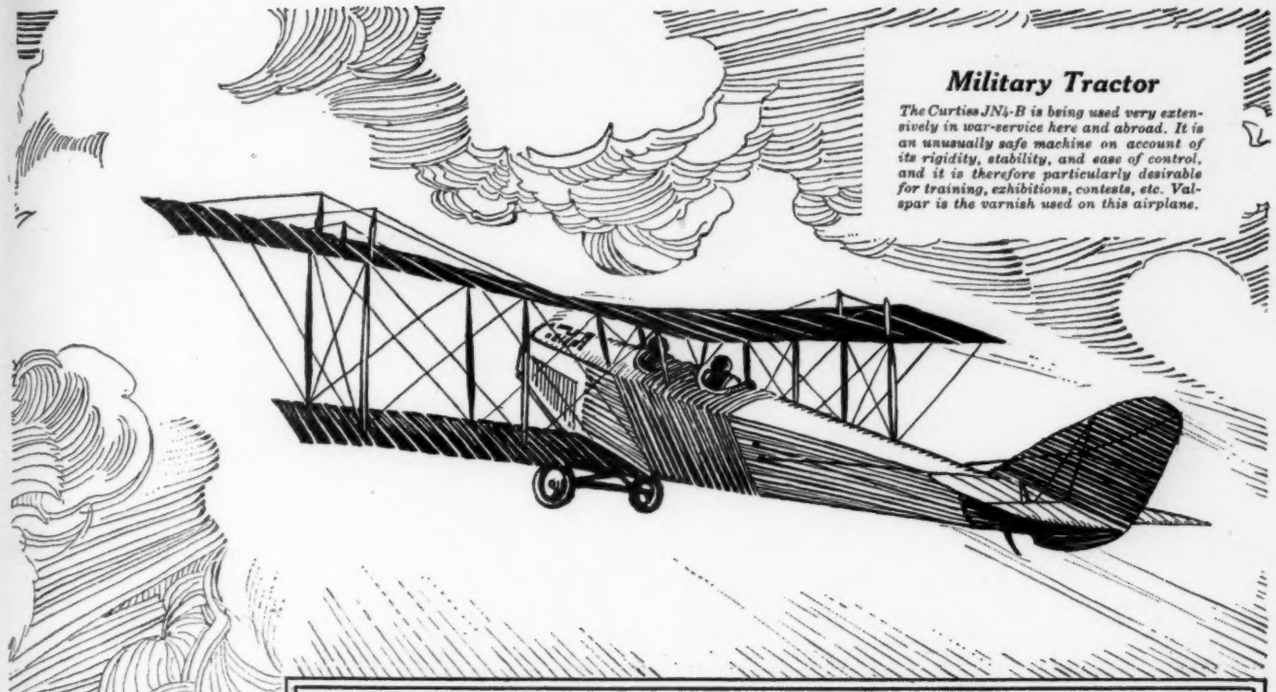

Military Tractor

The Curtiss JN4-B is being used very extensively in war-service here and abroad. It is an unusually safe machine on account of its rigidity, stability, and ease of control, and it is therefore particularly desirable for training, exhibitions, contests, etc. Valspar is the varnish used on this airplane.

Why the Allied Aircraft are Valsparred—

When a Valsparred airplane or seaplane returns from a battle with the enemy and the elements, the Valspar remains as fresh as ever. Winter's frost and snow, summer's sun and rain don't harm it. It is proof against hot or cold water in any form, oils, hot greases, or gasoline.

Valspar has proved itself in all the strenuous service of the war to possess every one of the qualities we have claimed for it. It has suffered ill-treatment of every possible kind and has stood up under every kind of punishment, and it can be applied under the most adverse conditions.

That is why Valspar is universally recognized among the Allied forces as the airplane-varnish.

We invite you to avail yourself of the wide experience of our Airplane Service Department. Our new and valuable handbook is also sent on request to Purchasing Agents and to Superintendents of Production.

VALENTINE & COMPANY, 456 Fourth Avenue, N. Y.

Largest Manufacturers of High-grade Varnishes in the World—ESTABLISHED 1832

New York Chicago Boston TRADE VALENTINE'S MARK Toronto London Amsterdam

W. P. FULLER & CO., Agents for the Pacific Coast: San Francisco and Principal Pacific Coast Cities

We are Contractors to **United States Army and Navy, British Admiralty and Royal Flying Corps, Dutch and Spanish Governments**

Valentine Products used by the world's leading airplane-makers include Valspar Varnish, Valspar Bristol Enamel, Valspar Low Visibility Gray Enamel, Valspar Olive-Drab Enamel, Valspar Black Enamel, Valspar Filler (Wood), Valspar Primer (Metal), Valspar Primer (Wood), Valspar Khaki Enamel, Valspar Aluminum Paint. Dipping, Spraying and Brushing coatings of all kinds, Quick-Drying Insignia Colors.

VALENTINE'S

VALSPAR

The Varnish That Won't Turn White

Copyright, 1918, Valentine & Company.

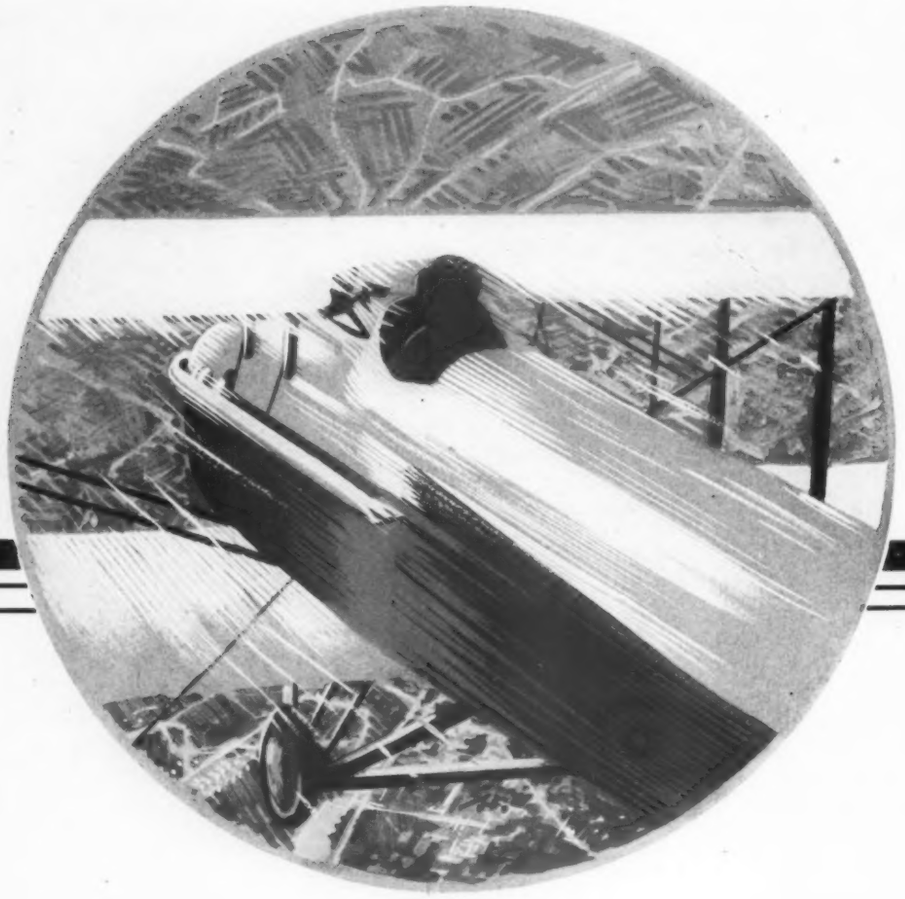

We manufacture the following parts for airplanes

All Standard Types of Turnbuckles
Tie Rods and Clevises
Thimbles Bolts
and Clevis Pins

THE
DAYTON METAL PRODUCTS CO.
DAYTON, OHIO, U. S. A.

AVIATION OFFICERS

of the Army and Navy fight in the same element—the Air

THE AIR SERVICE ASSOCIATION has been formed to give expression to their associated ideals and interests; to stimulate coordination, professional feeling, and *esprit de corps*, and to disseminate information of benefit to the services.

The organizers and members are all commissioned officers of the air services.

The Association has been endorsed and approved by Major-General Wm. L. Kenly, Director of Military Aeronautics, and by prominent Naval Aviation officers.

The initiation fee is ten dollars, including one year's subscription to the AIR SERVICE JOURNAL, the official publication of the A. S. A. There are no dues.

Send your application and initiation fee to Capt. Wm. J. Malone, Secretary, A. S. A., Gerstner Field, Lake Charles, La.

AIR SERVICE ASSOCIATION

Application for Membership

....., 1918

Capt. Wm. J. Malone, A. S. S. R. C.,
Secretary, Air Service Association,
Gerstner Field, Lake Charles, La.

Please enter my application for membership in the A. S. A. Enclosed is {(M. O.) / (Check)} for Ten Dollars covering initiation fee and one year's subscription to the official journal of the Association.

Name.....

Address.....

.....

VENUS PENCILS

No. 3820

YOU will find that the famous VENUS Pencils have that exactness of grading, that smoothness, ease of marking, and reliability that make them the very best pencils for *your* work.

Note: VENUS Pencils are being purchased by the Allied Governments for severe war time service.

17 black degrees
With and without eraser tip.
6B softest to 9H hardest
and hard and medium copying
—all perfect!

FREE!

(except packing and postage). Send 6c. in stamps to cover actual cost of packing and postage and we'll send FIVE trial length VENUS Pencils and VENUS ERASER for test!

American Lead Pencil Co.
242 Fifth Avenue, NEW YORK
and Clapton, London, England

VENUS ERASER
Superfine Quality
12 SIZES
Rubs out Cleanly and Easily
Will not Soil or Streak
RETAIL PRICES

IN THE AIR

Calls for

Speed—Strength—Ease of Control

In addition to these vital requisites the new Continental Pusher offers wide range of vision for Observer, Camera Man or Gunner.

The Continental Aircraft Corporation

Factory and Aviation Field
AMITYVILLE, L. I.

New York Office
120 LIBERTY STREET

MANUFACTURERS OF

Airplanes, Experimental Airplanes and Parts

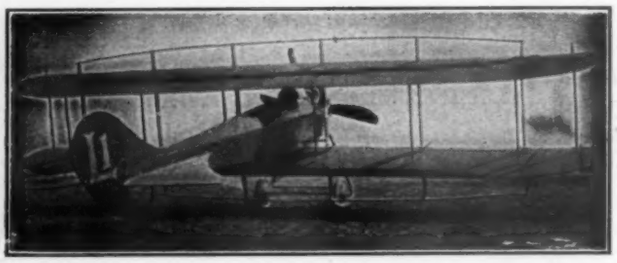

The
Lanzius Variable Speed Aeroplane

Executive Offices
3405-3407 Woolworth Bldg., New York City
Telephone 8580 Barclay

Lanzius Aircraft Company

WITTEMANN-LEWIS AIRCRAFT COMPANY

NEWARK, N. J.

Main Office and Factory:

Lincoln Highway near Passaic River

Telephone, Market 9096

Thomas

THOMAS-MORSE AIRCRAFT CORPORATION

ITHACA, N.Y. U.S.A.

Contractors to U. S. Government

FOR SALE



3 New Tractor Airplanes, with or without engines.
1 Used Tractor Airplane, equipped with engine.
2 New Flying Boats, equipped with engines.
2 Used Flying Boats, equipped with engines.

All in perfect condition. Prices range from $5200 to $11300

Address Box 12, AVIATION AND AERONAUTICAL ENGINEERING
120 West 32d Street, New York

WING-SPAR

The Aircraft Varnish

We offer our Emergency Service—WING-SPAR orders have preference in our factory.

On the approved lists of both the U. S. Army Signal Corps and the U. S. Navy.

Write for quotation—the low price will interest you.

Also Aircraft Enamels and Paints

Howe Varnish Co., Inc.

253-257 Norman Ave. Brooklyn, New York





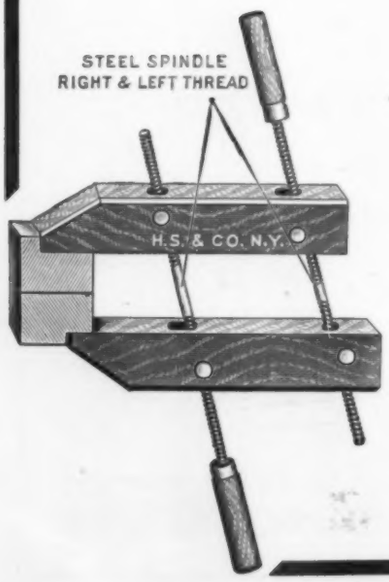

THE JORGENSEN PATENT

ADJUSTABLE HAND SCREW

is the first real improvement in years over the old style Wood Hand Screw.

JAWS CAN BE ADJUSTED TO ANY ANGLE. This is a decided advantage, as it saves the time usually spent in squaring up irregular surfaces. A *single clamp* will adjust to any of the positions shown, or any modification of them. One jaw can also be made to overlap the other.

SEND FOR SPECIAL CIRCULAR NO. 161

HAMMACHER, SCHLEMMER & CO.

HARDWARE, TOOLS AND SUPPLIES

New York, Since 1848 Fourth Avenue and 13th Street

P. Pryibil Machine Company

MANUFACTURERS OF

FINE WOOD WORKING MACHINES

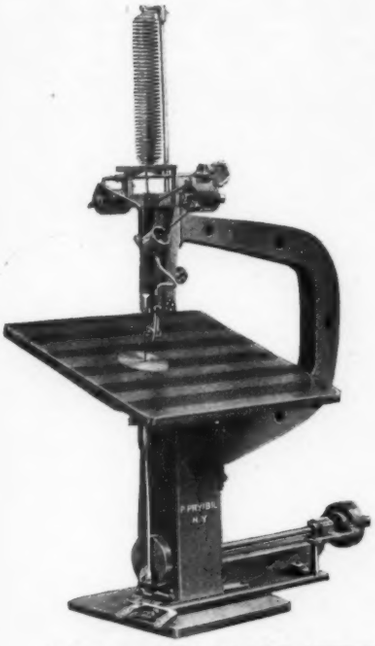

HIGH CEILINGS DO NOT AFFECT THIS JIG SAW

WE HAVE SERVED

CURTISS ENGINEERING CORPORATION
L. W. F. ENGINEERING COMPANY
WRIGHT-MARTIN AIRCRAFT CORPORATION
STANDARD AIRCRAFT CORPORATION
CONTINENTAL AIRCRAFT COMPANY

Why not you?

Factory, 512-524 West 41st Street, New York City
Established 1862

WIDMAN

Manufacturers of

Waterproof Ply Wood Panels of All Thicknesses and Plies

Stand Highest in Government Tests for
Strength and Water Resisting Qualities

FABRICATORS OF PARTS OF ALL KINDS

OUR ENGINEERING DEPARTMENT IS AT YOUR SERVICE

Sales Agents for Certus Glue

Absolutely Waterproof and accepted by the Government

J. C. WIDMAN & COMPANY

Fourteenth and Kirby Avenue Detroit, Michigan

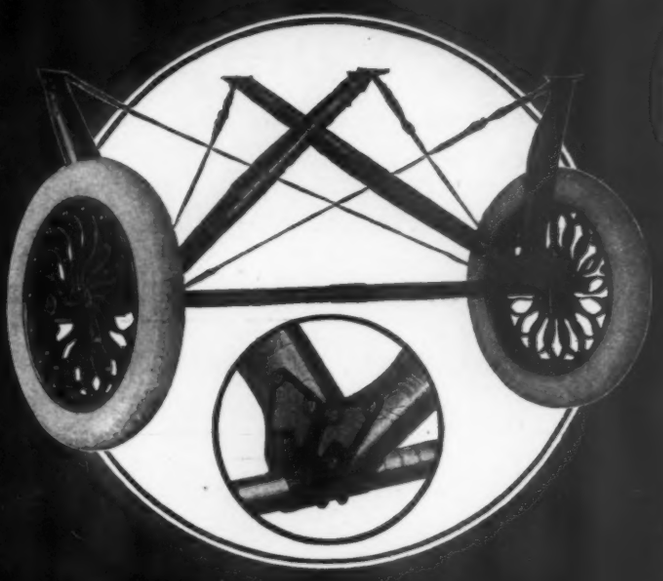

ACKERMAN LANDING GEAR

SIMPLICITY
STRENGTH
SERVICE

THE ACKERMAN WHEEL COMPANY
542 Rockefeller Building, CLEVELAND, OHIO. U.S.A.

WE USE THE CELEBRATED

LUMA

Radium Luminous Compound

For Aeronautic Instruments

Luma adds to the safety of night flying by making the dials of all indicating instruments plainly visible in the dark.

It meets the requirements of the British Admiralty and the specifications of the United States Government for use in connection with the great air fleets.

Manufacturers of aeronautic instruments who send us their dials to be illumined are assured of prompt service and the highest type of workmanship.

Literature and full information upon request.

RADIUM DIAL COMPANY

K-A-U-R-I

TRADE MARK

In use by Curtiss, Gallaudet and the United States Government

WATERPROOF VARNISH
NAVY GRAY ENAMEL
KHAKI ENAMEL

Used on wings, hulls and pontoons by the largest airplane manufacturers and boat builders because they are most durable, elastic, waterproof and economical. On the U. S. Govt. approved list

Brooklyn Varnish Mfg. Co.

35 NOSTRAND AVE.
BROOKLYN, NEW YORK

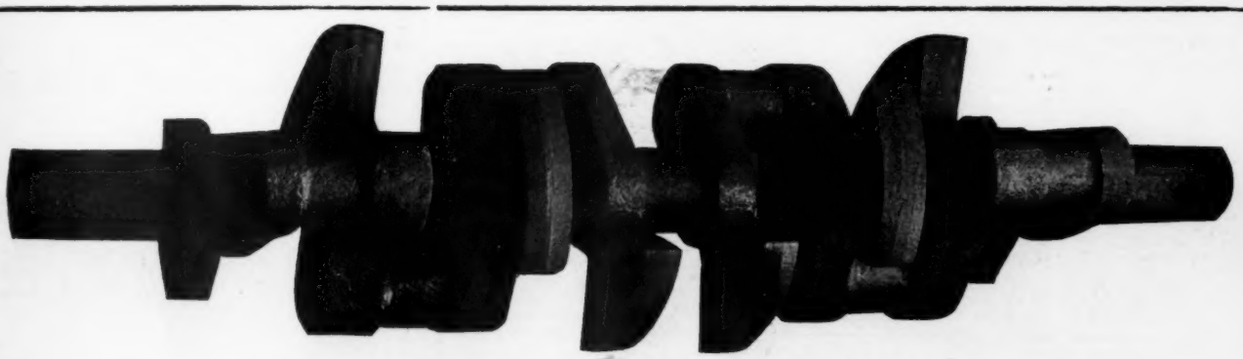

a counterbalanced aviation crankshaft . . . .

Patented July 10th, 1917

one of the 18 different
models we are now making
for 14 aviation motor companies . . .
reduces vibration and eliminates bearing pressure

We have shipped 62,377 Counterbalanced Crankshafts to May 22, 1918

THE PARK DROP FORGE CO. CLEVELAND, OHIO

FALCON

PROPELLERS

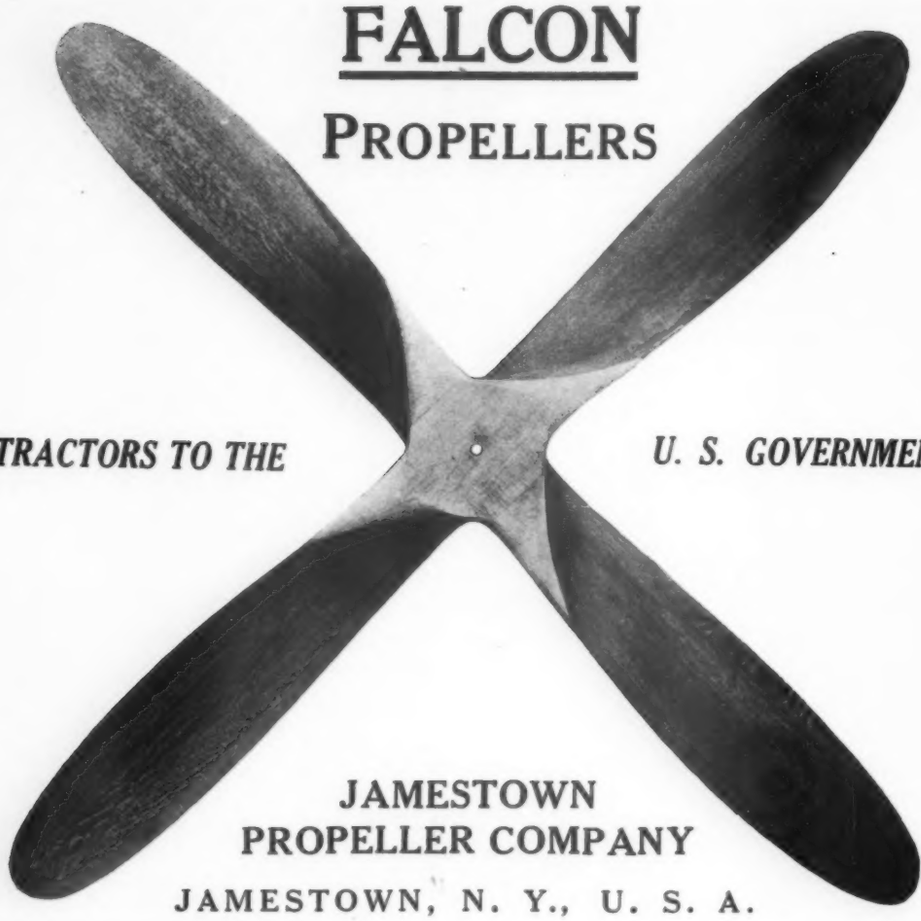

CONTRACTORS TO THE *U. S. GOVERNMENT*

JAMESTOWN
PROPELLER COMPANY

JAMESTOWN, N. Y., U. S. A.

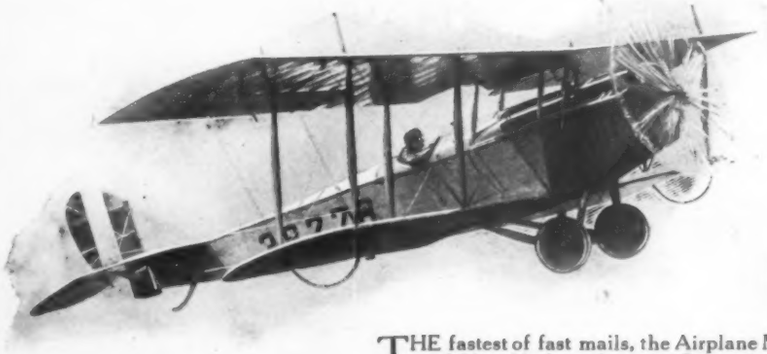

Hamilton Is the Watch of U. S. Mail Aviators

THE fastest of fast mails, the Airplane Mail Service between Washington, Philadelphia, and New York, reckons its flying time on a Hamilton Watch schedule.
The entire flock of aviators who inaugurated America's historic cloudland mail, wore military aviation model Hamilton Wrist Watches.

Hamilton Watch

The Watch of Aeroplane Accuracy

Famous for years as the watch of railroad accuracy, Hamiltons are carried by the majority of all train crews on lines having official time inspection. And now, worn by the intrepid army aviators who fly with the mail, the Hamilton is also destined to become the watch of aeroplane accuracy because of its thoroughly dependable, continuous, uninterrupted service. The modern watch for every service, whether on the ground, at sea, or in the air.

Military aviation model Hamilton Wrist Watches are made in cushion-shaped silver case, with unbreakable crystal, luminous dial, and khaki strap. There are 32 other Hamilton models to choose from, ranging from rugged utility cases to slender objects of sheer artistic beauty. Prices, $28 to $150. Movements, $15 ($17 in Canada) and up. Sold by all leading jewelers. Send for "The Timekeeper"—the story of Hamilton supremacy.

HAMILTON WATCH COMPANY, Dep't. 82, Lancaster, Pennsylvania

Not what it's called but what it does—

is the important consideration in selecting a self-luminant for instrument dials.

There are on the market "lumes," "rades" and "lites," but which name tells the story in the same straightforward way as Radium Luminous Material, more familiarly known as R.L.M.?

The first word guarantees *true* Radium, the second that it is really luminous and the last establishes the general nature of the compound. In combination these three words stand for *the superior self-luminant.*

America's largest watch manufacturer and America's greatest instrument manufacturers recognize R L M to be supreme in its field.

Full particulars sent on request. To avoid delay, address Department K.

Can you afford not to adopt it?

RADIUM LUMINOUS MATERIAL CORPORATION

55 Liberty Street
New York City

SEES AT NIGHT

Plants:
Orange, N. J.
Boonton, N. J.

Mines: Colorado, Utah

Fahrig Anti-Friction Metal

The Best Bearing Metal on the Market
A Necessity for Aeroplane Service

Fahrig Metal Quality has become a standard for reliability. We specialize in this one tin-copper alloy which has superior anti-friction qualities and great durability and is always uniform.

When you see a speed or distance record broken by Aeroplane, Racing Automobile, Truck or Tractor Motor, you will find that Fahrig Metal Bearings were in that motor.

FAHRIG METAL CO., 34 Commerce St., N.Y.

Why Does An Airplane Fly?

Sounds easy, doesn't it?

Because the propeller pushes or pulls it forward?

That's quite obvious.

But what do you know about surface area, wing curves, angle of incidence, lift and drag, air resistance, weights, balance, camber, horsepower, revolutions per minute?

Genuine airplane knowledge is at a premium today. The future of the industry is based upon it. Practical information is the foundation upon which the prestige of AVIATION AND AERONAUTICAL ENGINEERING has been built.

It records twice a month the advance made in the science of aeronautics, all the interesting news of the industry, and publishes drawings and photographs of American and foreign machines.

Fill out coupon, attach dollar bill and mail

Aviation *and* Aeronautical Engineering

The Gardner-Moffat Company, Inc.

120 West 32d Street, New York, N. Y.

Enclosed is one dollar, for which send me at .....

.....

AVIATION AND AERONAUTICAL ENGINEERING for six months.

.....

Aluminum Company of America

PITTSBURGH, PA.

MANUFACTURERS OF

Aluminum Ingot, Sheet, Tubing, Wire, Rod, Rivets, Moulding Extruded Shapes, Electrical Conductors

GENERAL SALES OFFICE,
2400 Oliver Building, Pittsburgh, Pa.

BRANCH OFFICES:

Boston.....131 State Street
Chicago.....1500 Westminster Building
Cleveland.....950 Leader-News Building
Detroit .....1512 Ford Building
Kansas City.....308 R. A. Long Building
New York .....120 Broadway
Philadelphia....1216-1218 Widener Building
Rochester .....1112 Granite Building
San Francisco.....731 Rialto Building
Washington..509 Metropolitan Bank Bldg.

CANADA
Northern Aluminum Co., Ltd.....Toronto

LATIN AMERICA
Aluminum Co. of So. Am...Pittsburgh, Pa.

ENGLAND
Northern Aluminium Co., Ltd.....London

Send inquiries regarding aluminum in any form to nearest Branch Office, or to General Sales Office

BANTA Military Books

for Members of the Aviation Corps

Manual of Military Aviation, Müller...$2.50
THE book on aviation. Approved by the War Department.

Manual of Military Training, Moss..... 2.25
140,000 copies now in use in the Army.

Officers' Manual, Moss..... 2.50
Officers can not get along without it.

Machine Guns, Hatcher, Wilhelm and Maloney 2.50
Full details of ALL makes of Machine Guns. Profusely Illustrated. Used at Springfield Arsenal M. G. School.

Army Paperwork, Moss..... 2.00
Complete guide on ALL paper work of all branches of the Service.

GEO. BANTA PUBLISHING CO.

MENASHA, WIS.

Complete catalogue on request

"The Cavalry of the Clouds and The Navy That Flies"

are now being given exclusive and intimate expression through the

Air Service Journal

the official publication of the *Air Service Association*—the only service organization of the aviation branches of the Army and Navy.

The Association was organized within the service, by flying officers, who elected their own officers, and its membership is made up of the men who are fighting and will fight our air battles.

In addition to the established editorial features of AIR SERVICE JOURNAL—all the news of the Air Services each week, foreign aeronautical news, notes of the flying fields and ground schools, Air Service orders, special articles on aeronautical subjects, and photographs of aerial happenings all over the world—it will feature exclusive articles by officers of the Air Services through the editorial board of the Air Service Association.

Special offer to new subscribers—two dollars a year, 52 issues; or one dollar for six months, 26 issues. Regular price three dollars, single copies ten cents

THE GARDNER-MOFFAT CO.
INCORPORATED
120 West 32d Street New York City

THE GARDNER-MOFFAT COMPANY
120 West 32d Street, New York City

Enclosed is { money order / check } for ..... dollars, for which send me AIR SERVICE JOURNAL for { one year. / six months.

Name .....

Address .....

.....

AVIATION 6-1

Aeronautical Trade Directory

AVIATION AND AERONAUTICAL ENGINEERING will furnish information and addresses of companies listed below.

Names of Advertisers in this issue are printed in capitals.
See Index to Advertisers on page 638

ACCESSORIES AND INSTRUMENTS

Advance Felt Specialty & Cutting Co.
King, Julius, Optical Co.
THE MOTO-METER CO.
National Gauge & Equipment Co.
O'Hara Waltham Dial Co.
Rieker, Walter.
SPERRY GYROSCOPE CO.
Standard Aeronautical Co.
TAYLOR INSTRUMENT COMPANIES
Western Electric Co.

AIRPLANES

Aeromarine Plane & Motor Co.
Blackhawk Airplane Co.
BOEING AIRPLANE CO.
Breese Aircraft Corp.
THE BURGESS COMPANY.
California Aviation Co.
Cooper, John D., Aeroplane Co.
CURTISS AEROPLANE & MOTOR CORP.
Dayton Wright Airplane Co.
Des Lauriers Aircraft Corp.
Dewey Aeroplane Co.
Engel Aircraft Co.
Falcon Mfg. Co.
Fisher Body Corp.
Fowler Airplane Corp.
Gallaudet Aircraft Corp.
Heinrich, A. S., Corp.
LANZIUS AIRCRAFT CO.
Lawrence-Lewis Aeroplane Co.
Lawson Aircraft Corp.
Lewis & Vought Corp.
Loening Aeronautical Eng. Corp.
Longren Aeroplane Co.
L. W. F. ENGINEERING CO.
MARTIN, GLENN L., CO.
Michigan Aircraft Corp.
ORDNANCE ENG'RING CORP.
Patterson Aeroplane Co.
Peirce, Sam'l S., Aeroplane Corp.
Smith, Kyle, Aircraft Co.
Sperry, Lawrence, Aircraft Co.
Springfield Airplane Co.
STANDARD AIRCRAFT CORP.
Sturtevant Aeroplane Co.
THOMAS-MORSE AIRCRAFT CORP.
The Willys-Morrow Co.
WITTEMANN-LEWIS AIRCRAFT CO.
Whittemore-Hamm Co.
Wright-Martin Aircraft Corp.

AIRPLANE ENGINES

Aeromarine Plane and Motor Co.
Ashmusen Mfg. Co.
Continental Motors Co.
CURTISS AEROPLANE & MOTOR CORP.
Dayton Aero Motors Co.
Detroit Gas Turbine Corp.
DUESENBERG MOTOR CORP.
General Ordnance Co.
General Vehicle Co.
Gyro Motor Co.
HALL-SCOTT MOTOR CAR CO.
Kemp Machine Works.
Kessler Motor Co.
Knox Motors Co.
Nordyke & Marmon.
Packard Motor Co.
Roberts Motor Mfg. Co.
Rolls-Royce, Ltd.
Springfield Motors Co.
Sterling Engine Co.
STURTEVANT, B. F., CO.
Trego Motors Corp.
THOMAS - MORSE AIRCRAFT CORP.
UNION GAS ENGINE CO.
Van Blerck Motor Co.
Willys-Overland Co.
WISCONSIN MOTOR MFG. CO.
World's Motor Co.
Wright-Martin Aircraft Corp.

AIRPLANE PARTS

Aircraft Parts Mfg. Co.
American Body Co.
Astoria Veneer Mill & Dock Co.
BARCALO MFG. CO.
Century Telephone Construction Co.
Chicago Aeronautical Supply Co.
DAYTON METAL PRODUCTS CO.
ERIE SPECIALTY CO.
KAWNEER MFG. CO.
LEVETT, WALKER M., CO.
New Jersey Veneer Co.
Pressed & Welded Steel Products Co.
Rogers Construction Co.
Standard Parts Co.
Welch Mfg. Co.
Whittemore-Hamm Co.
WIDMAN, J. C., & CO.
Willys-Morrow Co.
Wilson Cabinet Co.

ALUMINUM

Acieral Co. of America
Aluminum Castings Co.
ALUMINUM CO. OF AMERICA
American Metal Co., Ltd.
LEVETT, WALKER M., CO.
LEYGRAND & CO.
McAdamite-Aluminum Co.
SO-LUMINUM MFG. & ENG. CO. (SOLDER)
STIMPSON, EDWIN B., CO.
United Smelting & Aluminum Co.

AVIATION SCHOOLS

American School of Aviation
America Trans-Oceanic Co.
ATLANTIC COAST AERONAUTICAL STATION
Beam Airplane Co.
Blackhawk Airplane Co.
CURTISS TRAINING SCHOOLS
EAGLE AVIATION SCHOOL
The Hydrerocraft Co.
Michigan State Auto School
Moler Aviation Instructors
Penn. State School of Aero-Mechanics
Stinson School of Aviation
Whittemore-Hamm Co.

(*Continued on page 627*)

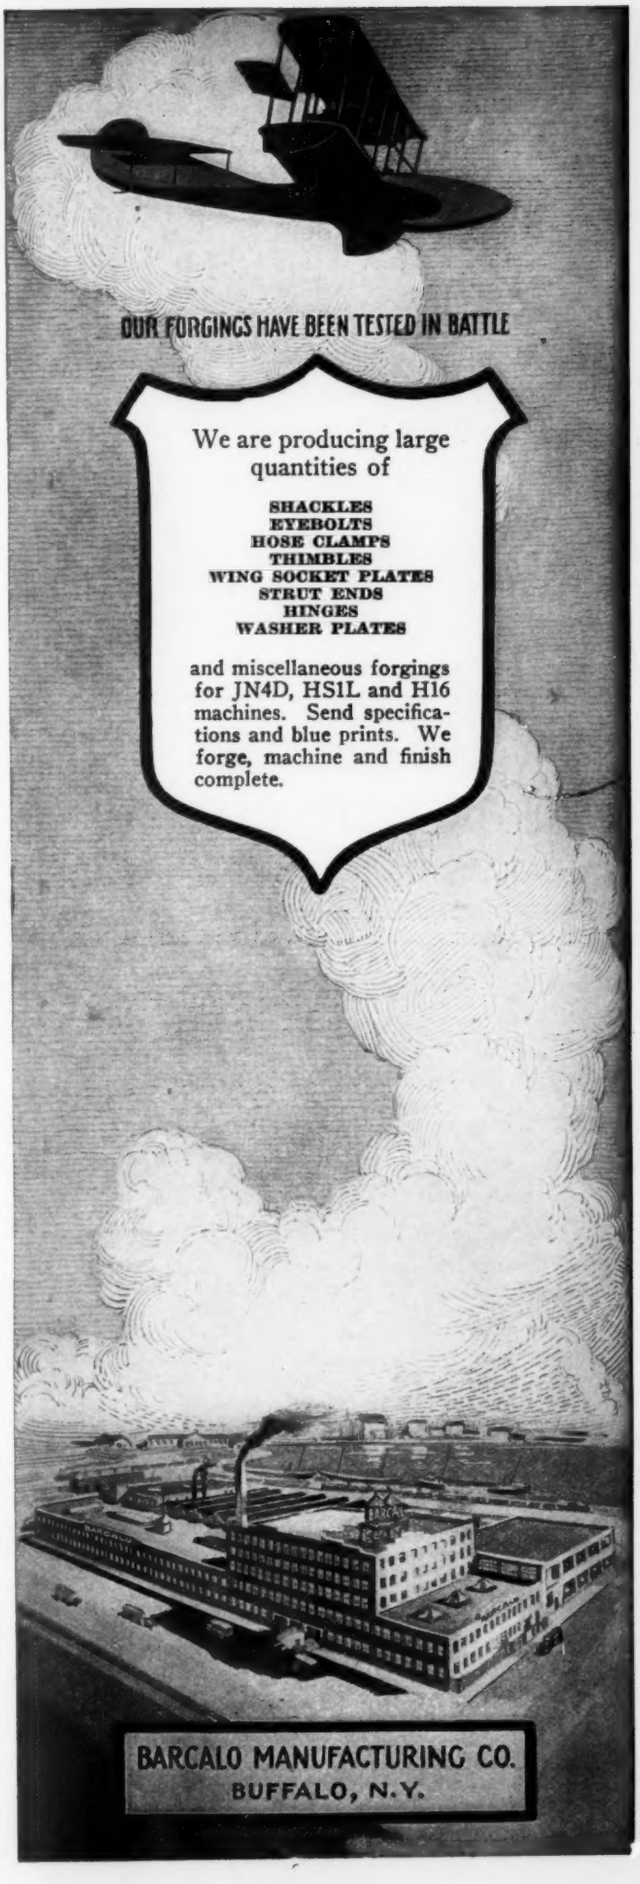

FUEL LEVEL GAGES

This cut shows our Model 51 Gage which is standard on practically all type of military training machines.

Other types of gages in large quantities are "doing their bit" as part of the equipment of English Government Warplanes.

SPECIAL TYPES DESIGNED FOR YOUR ESPECIAL NEEDS.

BOSTON AUTO GAGE CO.

8 WALTHAM STREET, BOSTON, MASS.

ROME AERONAUTICAL RADIATORS

Developed from years of experience in building all types of radiators.
They possess every feature and qualification necessary for a high grade product.

STRONG
EFFICIENT
DURABLE

Used on the best American flying machines.
Our engineering department is at your service.

Rome-Turney Radiator Company
Rome, N. Y., U. S. A.

AJAX Auto and Aero Sheet Metal Company
Manufacturers and designers of
AERO RADIATORS INTAKE and EXHAUST PIPES
H. W. MEYER, 245 West Fifty-fifth Street, New York

"Flexo" Aero RADIATORS

The only core that will stand severe landing shocks.

No sharp corners to crystallize through vibration.

The only core that can be so bent without injury to the metal or soldered joints.

"FLEXO"—PATENTED

FLEXO MANUFACTURING CO.

1812-1820 E. 12th STREET LOS ANGELES, CAL.

(Continued from page 625)

BALL BEARINGS
The Fafnir Bearing Co.
GURNEY BALL BEARING CO.
Hess-Bright Mfg. Co.
NEW DEPARTURE MFG. CO.
Norma Company of America
S. K. F. Ball Bearing Co.
U. S. Ball Bearing Mfg. Co.

BALLOONS: DIRIGIBLES
Burdette Oxygen Co.
Connecticut Aircraft Co.
Custer Specialty Co. (Statoscope)
Gas Engineering Co. (Gas Plants)
Goodyear Tire and Rubber Co.
United States Rubber Co.

BAROGRAPHS AND BAROMETERS
Green, Henry J.
HAUSTETTER, A.
Sussfield & Lorch
TAYLOR INSTRUMENT COMPANIES

BEARING METALS
Aluminum Castings Co.
AMERICAN BRONZE CO.
FAHRIG METAL CO.
LEVETT, WALKER M., CO.
Magnolia Metal Co.

BUSHINGS
Aluminum Castings Co.
Bound Brook Oil-less Bearing Co.

CARBURETORS
H. & N. Mfg. Co.
Master Carburetor Co.
Miller Carburetor Co.
Stromberg Motor Devices Co.
Wheeler & Schebler
ZENITH CARBURETOR CO.

CLOCKS AND WATCHES
Chelsea Clock Co.
Depollier, J., & Son
HAMILTON WATCH CO.
Ingersoll, Robert H., & Bros.
Waltham Watch Co.

CLOTHING
Abercrombie & Fitch
Cross, Mark
N. Y. Sporting Goods Co.
Rainwear Co.
Rogers, Peet & Co.
Sanders Company
Spalding, A. G., & Bros.

COMPASSES
SPERRY GYROSCOPE CO.
Star Compass Co.
TAYLOR INSTRUMENT COMPANIES

DOPE AND VARNISH
Adams & Elting Co.
American Emaillite Co.
BROOKLYN VARNISH MFG. CO.
CHEMICAL PRODUCTS CO.
Conover, The C. E., Co.
DU PONT CHEMICAL WORKS
Flexible Compound Co.
Harland, Wm., & Son
HOWE VARNISH CO.
Lucas, John, Company
Masury, John W., & Son
Perry-Austen Company
Pratt & Lambert
SHERWIN-WILLIAMS CO.
Smith, Edward, & Co.
Standard Varnish Works
VALENTINE & COMPANY
Weeks & Co.

DRIFT INDICATOR
SPERRY GYROSCOPE CO.

DRY KILNS
Cutler Dry Kiln Co.
Grand Rapids Veneer Works

DYNAMOMETER
Sprague Electric Works

ENGINE PARTS
Allegheny Forging Co.
Aluminum Castings Co.
Anderson Forge & Machine Co.
BARCALO MFG. CO.
Burd High Compression Ring Co.
Crosby Steam Gage & Valve Co.
Dallet, Thos. H., Co.
DOEHLER DIE CASTING CO.
ERIE SPECIALTY CO.
Fibre Finishing Co.
Gifford, Leland, Co.
Gill, P. H., & Sons
Hayes Mfg. Co.
Hydraulic Pressed Steel Co.
LEVETT, WALKER M., CO.
Meisel Press Mfg. Co.
PARK DROP FORGE CO.
Pressed & Welded Steel Products Co.
Standard Parts Co.
STIMPSON, EDWIN B., CO.
Taft-Peirce Mfg. Co.
TIOGA STEEL & IRON CO.
Williams, J. H., & Co.
WHITMAN & BARNES MFG. CO.
WYMAN-GORDON CO.

ENGINEERING
AUTOMOTIVE ENGINEERING CO.
ORDNANCE ENGINEERING CO.
WHITE, J. G., ENGINEERING CORP.

FABRICS
Courtrai Mfg. Co.
Hutchinson, Scott Co.
Lamb, Finlay & Co.
McBratney, Robt., & Co.
Whitman, Clarence & Co.

FELT
Advance Felt Specialty & Cutting Co.
Booth Felt Co.
Western Felt Works

FIRE EXTINGUISHERS
Fyr-Fyter Co.
JOHNS-MANVILLE, H. W., CO.
Pyrene Mfg. Co.

GAGES
Advance Felt Specialty & Cutting Co.
BOSTON AUTO GAUGE CO.
Crosby Steam Gauge & Valve Co.
FOXBORO CO., INC.
Greenfield Tap & Die Corp.
United States Gage Co.

GASKETS
Advance Felt Specialty & Cutting Co.
Booth Felt Co.
Fibre Finishing Co.

GLUE
Armour Glue Works
Baeder & Adamson
Ferdinand, L. W., & Co.
WIDMAN, J. C., CO.

(Continued on page 629)

JACUZZI BROTHERS
2034 San Pablo Avenue, Berkeley, Calif.

Propeller Manufacturers

For Airships

For Airplanes

OVER TWENTY TYPES OF PROPELLERS ARE MANUFACTURED CONTINUALLY AT OUR PLANT

WE DESIGN PROPELLERS TO MEET DIFFERENT REQUIREMENTS

Write for our price list

MARVELITE
Alight at Night

MARVELITE
For Dials At Night
A Radium Compound

Reliable. Practically Permanent. Used by United States Government and prominent manufacturers.

Prompt deliveries guaranteed.

Demonstrations for manufacturers without charge. Correspondence invited.

Send for Booklet No. 6 containing valuable information about luminous materials

Cold Light Manufacturing Co.
558 West 158th Street :: New York

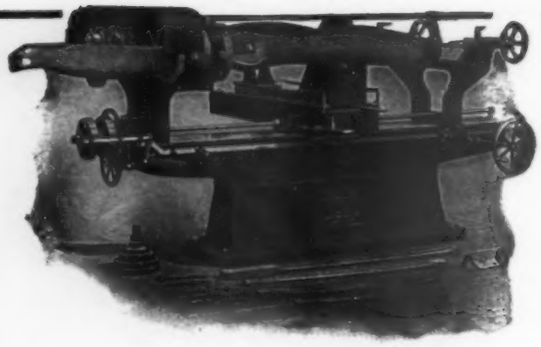

THE No. 613 DEFIANCE AEROPLANE PROPELLER TURNING LATHE

TAKES THE PLACE OF EIGHT TO TEN SKILLED WORKMEN

IT'S conserving man power. Each Defiance Aeroplane Propeller Turning Lathe releases from eight to ten skilled workmen for other duties. With one man operating a number of machines, the cost of working propeller blades close to size is cut to little or no consideration—a big saving that's added to profits. This machine is in use in England, in Italy, in Canada—it is used by the United States Government. Installations by twelve of the leading propeller manufacturers in America endorses this machine as the most practical and economical method of shaping propeller blades. It's a high productive machine, made to keep pace with present day requirements, either in output, accuracy, or production cost. It will turn propeller blades of various sizes—to any shape or pitch—and leaves but the final finishing to be done by hand. It will duplicate struts, as well as propellers, of irregular shape to exactness.

An illustrated and descriptive circular of this machine will be mailed on request.

THE DEFIANCE MACHINE WORKS

DEFIANCE, OHIO, U. S. A.

NEW YORK *LONDON*

"DALTON SIX"

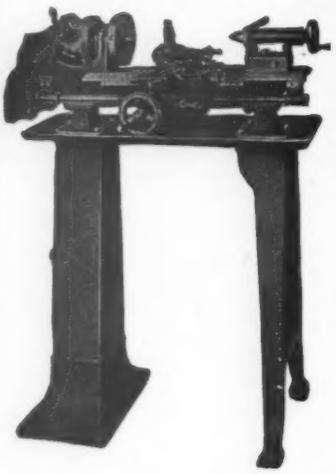

In the Manufacture of Aeroplanes or the many small parts comprising a Unit

"Dalton Six"

is indispensable.

Furnished for English or Metric Thread Cutting.

One Manufacturer of fine instruments for aeroplanes now has

(36) "DALTON SIXES" Installed

Why Not Investigate?

BULLETIN B602C GIVES DETAILS

Dalton Manufacturing Corp.

Successors to Dalton Mach. Co., Inc.

1911 Park Avenue New York, U. S. A.

MATTISON

Propeller Shaping Machine

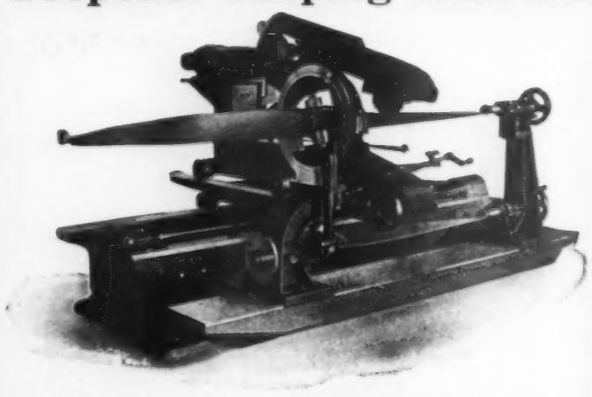

For Two, Three and Four-Bladed Screws

A brand new machine—designed and built with the thoroughness characteristic of all Mattison woodworking machines—which has been approved by many of America's largest propeller manufacturers.

It works close to finish-size, thereby eliminating the greater part of the expensive hand work which usually follows the machining operation of other methods.

Write or Wire for Details

MATTISON MACHINE WORKS

879 FIFTH STREET BELOIT, WISCONSIN

FOX

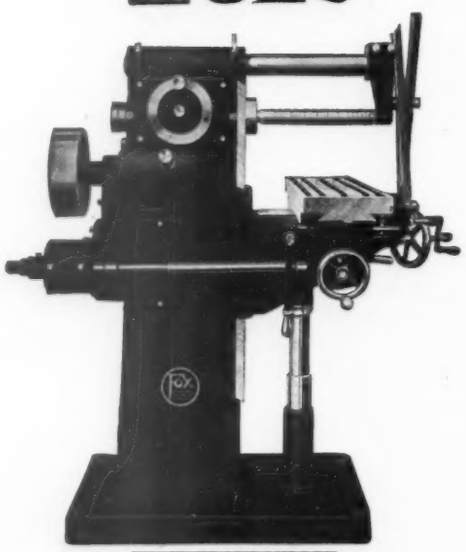

No. 2B PLAIN MILLER

Single Pulley Drive

12 changes to spindle speeds
6 changes to each spindle speed

No. 9 taper in spindle.
Table 8½ x 37"

Hardened machine steel gears throughout insure maximum driving power at all speeds.

We also build Universal Millers, Dividing Heads, Vertical Attachments and Vises.

Write for Circular

THE FOX MACHINE COMPANY

1810 W. Gavson St., Jackson, Mich.

Formerly of Grand Rapids, Mich.

(Continued from page 627)

GOGGLES

Hardy, F. A., Co.
Meyrowitz, E. B.
STRAUSS & BUEGELEISEN
Strong, Kennard & Nutt
Triplex Safety Glass Corp.
Willson, T. A., & Co., Inc.

HANGARS

American Bridge Co.
Anchor Corrugating Construction Co.
Ashley Steel Bldg. Co.
Austin Co., The
Barney, John M.
Howell, Field & Goddard, Inc.
Keasby & Mattison
Milliken Brothers
Pruden, The C. D., Co.
Steel Fabricating Co., The
Virginia Bridge & Iron Co.

HOISTS

YALE & TOWNE MFG. CO.

LIFE PRESERVERS

Robinson-Roders Co.
Universal Safety Mattress Co.

LUMBER

Alcock Co., John L.
American Balsa Corp.
Chetham Lumber Co.
Delatour, J.
Dutton, A. C., Lumber Corp.
Ludlow, Israel
Mengel, C. C., & Bros. Co.
New Jersey Veneer Co.
Sheip & Vandergrift

LUMINOUS COMPOUND

COLD LIGHT MFG. CO.
Cummings, W. L., Chemical Co.
RADIUM DIAL CO.
RADIUM LUMINOUS MATERIAL CORP.

MACHINERY, METAL WORKING

DALTON MFG. CORP.
DEFIANCE MACHINE WORKS
FOX MACHINE CO.
Warner & Swasey Co.

MACHINERY, WOOD-WORKING

Curtis Machine Corp.
DEFIANCE MACHINE WORKS
FOX MACHINE CO.
Machinery Merchants, Inc.
MATTISON, C., MACHINE WORKS
Olney & Warrin
PRYIBIL, P., MACHINE CO.

MAGNETOS

Berkshire Magneto Corp.
Bosch Magneto Co.
ERICSSON MFG. CO.
Remy Electric Co.
Splitdorf Electrical Co.

MANIFOLDS

AJAX AUTO & AERO SHEET METAL CO.
Pressed & Welded Steel Products Co.

METALS

Acieral Co. of America
American Vanadium Co.
Bethlehem Steel Co.
BETZ-PIERCE CO., THE
BLUM, JULIUS & CO.
Detroit Pressed Steel Co.
Federal Pressed Steel Co.
Garland Ventilator Co.
Gueder, Paeschke & Frey Co.
KAWNEER MFG. CO.
La Salle Steel Co.
LEVETT, WALKER M., CO.
Rumford Metal Co.
SO-LUMINUM MFG. & ENG. CO.
Steel Sales Corp.
Standard Alloys Co.
STEEL PRODUCTS CO.
STIMPSON, EDWIN B., CO.
Wheeler, Frank H., & Son

MODEL AIRPLANES

Ideal Aeroplane Supply Co.
Wading River Mfg. Co.

MOTORCYCLES

Excelsior Motor Mfg. Supply Co.
HENDEE MFG. CO.
Harley-Davidson Co.
Militare Motor Vehicle Co. of America

OILS AND LUBRICANTS

Baker Castor Oil Co.
Graphite Lubricant Co.
Gulf Refining Co.
Sheppard Ideal Oil Co.
Sun Co., The
Standard Oil Co.
Swan & Finch
Texas Co., The
Vacuum Oil Co.

PACKING

Advance Felt Specialty & Cutting Co.
Booth Felt Co.
Fibre Finishing Co.

PHOTOGRAPHY

BROCK, ARTHUR, JR.
Herbert & Huesgen Co.

PISTONS

Aluminum Castings Co.
LEVETT, WALKER M., CO.

PISTON RINGS

American Piston Ring Co.

PONTOONS

Niagara Boat Co.
PALMER-SIMPSON CO.
Welin Marine Equipment Co.

PROPELLERS

AMERICAN PROPELLER & MFG. CO.
American Sash & Door Co.
Aviauto Mfg. Co.
Breitung & Co., Ltd.
C. M. O. Physical Laboratory
DOYLE, W. A.
HARTZELL WALNUT PROPELLER CO.
JACUZZI BROS.
JAMESTOWN PROPELLER CO.
Lang Propeller Co. of America
Steves Sash & Door Co.
Reinforced Propeller & Insulating Co., The
United States Aero Propeller Co.
Washington Aeroplane Co.
WEST WOODWORKING CO.

(Continued on page 631)

TRADE YALE MARK

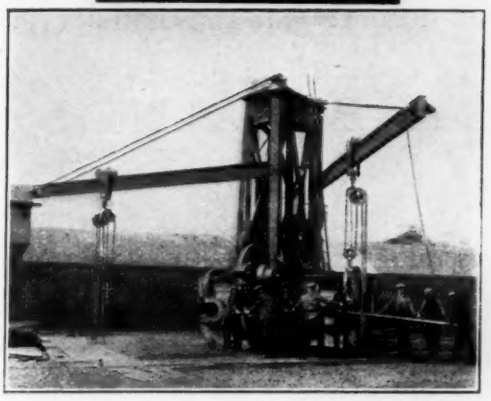

Yale Spur-geared Blocks handling Plates in Shipyard

"Speeding up"—*and Yale Spur-geared Blocks*

Everywhere the great national cry is speed—speed—speed. Ships, aeroplanes, guns, munitions—all demand haste. *They must have priority.*

Yale Spur-geared Blocks are helping build Uncle Sam's great Merchant Fleet. They are part of the equipment of every vessel where safe, dependable hoisting apparatus must be ready for every emergency.

No ship's equipment is complete that does not include Yale Hoists to handle any load—light or heavy.

Yale Spur-geared Blocks are designed, built and tested on the basis of quality: to stand the 50% overload test of 3360 lbs. to the rated ton. The guarantee is in the block itself.

For sale by Machinery Supply Houses

Put your hoisting problems up to us.

ASK FOR NEW CATALOG

For Factory locking equipment use a Yale Master-key System. Write us for particulars.

The Yale & Towne Mfg. Co., 9 East 40th Street, New York City

Johns-Manville

JOHNS-MANVILLE SERVICE COVERS THE CONTINENT

Aeronautic Instruments

OUR designing staff and manufacturing organization are both at the call of those who require *speed indicating* and *revolution recording* instruments.

We invite your special problems in airplane accessory apparatus.

H. W. Johns-Manville Co.
New York City

10 Factories. Branches in 60 Cities

WIRE WHEELS

FOR COMBAT AND ALL OTHER TYPES OF

AIRPLANES

CONTRACTORS TO LEADING AIRPLANE COMPANIES

Our Engineering Department will gladly cooperate with you in your experimental work

SPRANGER WIRE WHEEL CORPORATION

DETROIT, U. S. A.

NEW YORK REPRESENTATIVE

THOS. C. CHEASLEY

137 West 47th Street Phone Bryant 8570

FLYING-SCHOOL

in operation with two Military Training Tractors almost identical to the JN4B Tractors. Curtis OX2 motors as standard equipment; Dep and stick controls. Twelve other machines under construction with three almost completed.

$75.00 MECHANICAL COURSE

includes wireless, motor care and repair, actual mechanical experience in factory, in airplane construction, field work, aerodynamics, and mechanical drawing. Living expenses moderate. As we are short on mechanics offers good opportunities to our graduates.

SPECIAL 30 DAY OFFER

To all students contemplating services to Government, enrolling in the mechanical class within 30 days, ½ tuition for same will be paid by Joe A. Bartles, who has offered three square miles of level land to the Government for U. S. Aviation Field.

Write for Pictorial Booklet.

DEWEY AIRPLANE COMPANY, DEWEY, OKLA.

IN ACTUAL DAILY PERFORMANCE

In every branch of military service—Engineering Corps, Aviation Section, Quartermaster Corps, and general Patrol, Scout, and Dispatch duty—you will find the

Indian Motocycle With Powerplus Motor

Greatest strength, endurance, speed, power, accessibility, and all-round dependability.

We will be pleased to arrange demonstrations of all Indian models for interested military officials

Illustrated Indian Catalog and other descriptive literature sent anywhere on request

HENDEE MANUFACTURING COMPANY

(Largest Motorcycle Manufacturers in the World)

767 STATE STREET SPRINGFIELD, MASSACHUSETTS

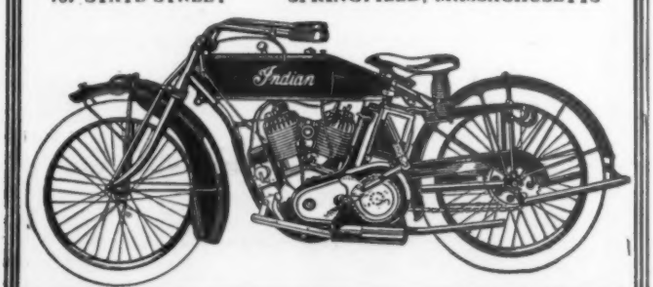

WEST WOODWORKING COMPANY

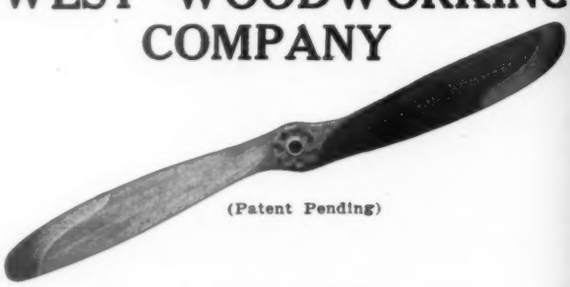

(Patent Pending)

Manufacturers of

Westmoore Propellers
Swesco Wing Beams
Waterproof Plywood Panels
Laminated Construction for All Parts

Highest Quality
Quantity Production
Prompt Shipments

Address:

WEST WOODWORKING COMPANY

308-324 N. Ada Street Chicago

Cable address "SWESCO"

Cabinet makers with over thirty years' successful business behind them

(Continued from page 629)

PYROMETERS
FOXBORO CO., INC., THE
MOTO-METER CO.
Shore Instrument & Mfg. Co.
TAYLOR INSTRUMENT COMPANIES

RADIATORS
AJAX AUTO & AERO SHEET METAL CO.
A-Z Co.
Bush Mfg. Co.
El Arco Radiators Co.
English & Mersick Co.
FLEXO MFG. CO.
Livingston Radiator Co.
McCord Mfg. Co.
Standard Roller Bearing Co.

RIVETS
STIMPSON, EDWIN B., CO.

SCELEROSCOPE
Shore Instrument & Mfg. Co.

SHEET METAL FITTINGS
BLUM, JULIUS & CO.
Rogers Construction Co.

SHOCK ABSORBERS
Dural Rubber Corp.
General Rubber Goods Co.
RUSSELL MFG. CO.
WOOD, J. W., ELASTIC WEB CO.

SPARK PLUGS
Bosch Magneto Co.
Champion Ignition Co.
JOHNS-MANVILLE, H. W., CO.
Rajah Auto Supply Co.
Silvex Co., The
Splitdorf Electrical Co.

SPEED INDICATORS
FOXBORO CO., INC.
JOHNS-MANVILLE, H. W., CO.
Stewart-Warner Speedometer Corp.

STABILIZERS
Greene Aeronautical Co.
Martin Aerodynamic Stabilizer.
SPERRY GYROSCOPE CO.

STAMPINGS
BLUM, JULIUS & CO.
LANSING STAMPING & TOOL CO.
Dewes Co., The A.
STIMPSON, EDWIN B., CO.

STARTERS
Bijur Motor Lighting Co.
Bosch Magneto Co.
CHRISTENSEN ENGINEERING CO., THE
Dayton Engineering Laboratories Co.
MOTOR-COMPRESSOR CO.
Northeast Electric Co.
Remy Electric Co.
Wagner-Hoyt Electric Co.
JOHNS-MANVILLE, H. W., CO.
Nelson Blower & Furnace Co.
Queen-Gray Co.
Stewart-Warner Speedometer Corp.
Veeder Mfg. Co.

TANKS
Janney, Steinmetz & Co.

THERMOMETERS
FOXBORO CO., INC., THE
MOTO-METER CO.
TAYLOR INSTRUMENT COMPANIES

TIRES AND RUBBER
Dural Rubber Corp.
Goodyear Tire & Rubber Co.
Hodgman Rubber Co.
United States Rubber Co.
WOOD, J. W., ELASTIC WEB CO.
Whitley Exerciser Co.

TOOLS
American Tool Works Co.
Bass Brothers
BLUM, JULIUS & CO.
BROOKS MACHINE CO.
Browne & Sharpe
Cooper Aeroplane Co., The John D.
HALL-SCOTT MOTOR CAR CO.
HAMMACHER, SCHLEMMER & CO.
LANSING STAMPING & TOOL CO.
Peck, Stowe & Wilcox Co.
Rich Tool Co.
Rogers Works, John M.
WHITMAN & BARNES MFG. CO.

TRUCKS AND TRAILERS
Federal Motor Truck Co.
Four Wheel Drive Auto Co.
Nash Motors Co.
Packard Motor Car Co.
Sechler Company, The
Service Motor Truck Co.
White Company, The

TUBING
American Tube Co.
BLUM, JULIUS & CO.
Dewes Co., The A.
Empire Art Metal Co.
Frasse & Co., Peter A.
National Tube Co.
PENNSYLVANIA FLEXIBLE METALLIC TUBING CO.
STIMPSON, EDWIN B., CO.

TURNBUCKLES
Aero Mfg. & Accessories Co.
DAYTON METAL PRODUCTS CO.
Dillner-Meyer Mfg. Co.
ERIE SPECIALTY CO.
National Aeroplane Co.
New York & Hagerstown Metal Stamping Co.
STANDARD TURNBUCKLE CO.
STEEL PRODUCTS CO.

WHEELS
ACKERMAN WHEEL CO.
Dayton Wire Wheel Co.
Hayes Wheel Co.
MOTT WHEEL WORKS
National Wire Wheel Works
SPRANGER WIRE WHEEL CORP.
Wire Wheel Corporation of America

WIRE
American Steel & Wire Co.
Century Telephone Construction Co.
Electric Cable Co.
Rathbone, A. B. & J.
ROEBLING'S SONS, JOHN A.
Simplex Wire & Cable Co.
Upson-Walton Co.

WIRELESS
American Radio & Research Corp.
American Wireless Telegraph Co.
Cutting & Washington, Inc.
Crocker-Wheeler Co.

Elastic Aviation Cord

For Shock Absorbers on Airplanes

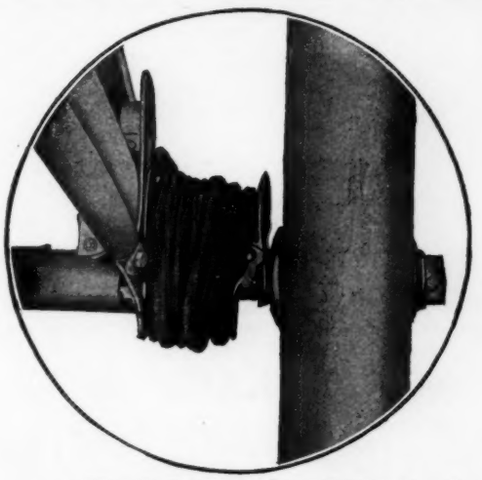

We originated and have developed this special heavy elastic cord for airplane shock absorbers.
We are the largest manufacturers in the world of Heavy Elastic Cord and owing to our factory capacity we can make prompt deliveries.

Samples on request

J. W. WOOD ELASTIC WEB CO.
FACTORY: STOUGHTON, MASS.

OFFICES
45 EAST 17TH STREET . . . . . NEW YORK
181 W. LAKE STREET . . . . . CHICAGO
32 ST. PETER STREET . . . . . MONTREAL, CANADA

TURNBUCKLES

of the

Highest Quality

to Meet the Most
Exact Requirements

Standard Turnbuckle Company

CORRY, PA.

New York Office: Woolworth Building

Factors of Safety

These Count in Aeroplane Construction

NON-INFLAMMABLE

Cellulose Acetate Base

Celestron Cloth Varnishes

provide another SAFETY FACTOR

NON-INFLAMMABLE

Celestron Sheets AND Films

Transparent — Waterproof

MANUFACTURED BY

Chemical Products Company

93 Broad Street Boston, U. S. A.

Manufacturers of Cellulose Acetate for nearly 15 years

GROVER C. LOENING

Announces

THE NEW 1918 EDITION

ENLARGED

and

SIMPLIFIED

Of his extensively used textbook

Military Aeroplanes

Almost doubled in size and with the finest halftone and linecuts available

For sale
GROVER C. LOENING
45 Eleventh St.
Long Island City, N. Y.

Price $4.75

FOR IMMEDIATE DELIVERY

New Model Resistal Goggles, $9.00 each

Resistal Masks, fur lined, $15.00 each

Also full face, leather masks with original Triplex lenses, $18.00 each

Prices and Deliveries on Request

A. HAUSTETTER

308 Madison Avenue, New York City

All Requirements Met

WEIGHT 20 to 35 pounds complete for 4, 6, 8 or 12 cylinder motors.

EFFICIENCY 100% in any weather, at any altitude.

DURABILITY Outlasts any motor

Christensen Self-Starter

A PROVEN SUCCESS

HUNDREDS IN ACTUAL FLYING SERVICE

The Christensen starter has made good in actual daily service. This is the test that counts. At any aviation camp "Somewhere in America" it is Doing Its Bit.

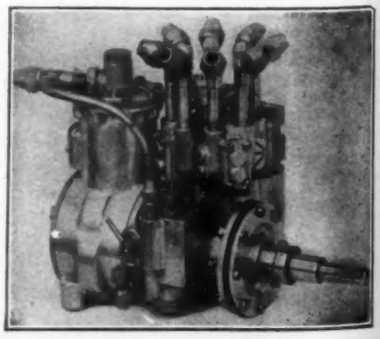

LITERATURE ON REQUEST. BLUE PRINTS AND FURTHER DATA TO ENGINEERS

THE CHRISTENSEN ENG. CO., 861-1st Nat. Bank, Milwaukee, Wis.

STIMPSON SHEET BRASS

DROP FORGINGS

THE WHITMAN & BARNES MANUFACTURING CO.

ESTABLISHED 64 YEARS

1000 WEST 120th STREET, CHICAGO, ILL.

FOXBORO

QUALITY INSTRUMENTS FOR AIRPLANES

Airspeed Indicator or Buoyancy Meter
Gasoline Level Indicator
OIL PRESSURE GAUGE

Indicating Dial Type Thermometer
for circulating oil and water
AIR PRESSURE GAUGE

The Foxboro line also includes many different types of indicating and recording gauges and thermometers designed for all sorts of conditions and purposes.

THE FOXBORO CO., Inc., FOXBORO, MASS., U.S.A.

NEW YORK CHICAGO PITTSBURGH PHILADELPHIA ST. LOUIS
SAN FRANCISCO BIRMINGHAM, ALABAMA PEACOCK BROS., MONTREAL

AEROPLANE RIMS and WHEELS

Made by the oldest and best known steel rim and wire wheel makers in America.

Quotations gladly furnished.

The MOTT WHEEL WORKS
Utica, N. Y.

Automotive Engineers

interested in the superior performance of their

Aeronautical Motors

should communicate with us without delay

METAL PRODUCTS CO.
3205 South Broadway
St. Louis, Mo.

SEAMLESS STEEL TUBING

Large Stock on Hand

Prompt Mill Deliveries

COLD DRAWN SHAFTING AND SCREW STEEL

Send for Catalogues

JULIUS BLUM & COMPANY **510-512 West 24th Street, New York, N. Y.**

Branches: Boston, Chicago, Philadelphia

ORDNANCE ENGINEERING CORPORATION

NEW YORK OFFICE
120 Broadway, Equitable Building

LONDON OFFICE
19 Queen Anne Chambers, Westminster, S. W.

Government Contractors : : Consulting Engineers

Manufacturers of Illuminating Shells, Trench Howitzers, Hand Grenades, etc., etc.

Naval and Military Appliances and Parts designed, developed and perfected

Designers and Builders of Military and Naval
AIRCRAFT

PHOTOGRAPHIC TESTING DEPARTMENT OF CAMERAS

THE BROCK AUTOMATIC CAMERAS

are the only cameras that make good negatives with shutter speeds of 1/100th of a second or less at speeds of over 100 miles per hour.

ARTHUR BROCK, JR.

OFFICE—511 Bullitt Building, 131 South Fourth Street
FACTORY—533 North Eleventh Street
PHILADELPHIA, PA.

Scientific Instruments, Tools, Dies, Jigs and Fixtures

Factory occupies 23,000 square feet of floor space
Screw Machine Capacity up to 2¼ inches

Aviators' and Gunners' Safety Belts

Of Web and Leather

Airplane Leather Work of All Kinds

SCHEUERMAN CO., Inc.

332 Pearl Street BUFFALO, N. Y.

DON'T SCRAP ALUMINUM PARTS

USE SO-LUMINUM—NEW WELDING SOLDER

Broken 90 H. P. Flat crank case repaired for the United States Navy in 45 hours' time and at $15.00 expense by use of So-Luminum, as against $400.00 and five months' time to get a new one—is in perfect condition after two years' use. Use gasoline or blow torch—no flux or special tools required.

Booklet and directions on request. Sample bar, $1.00. Used and indorsed by the United States Army and Navy, auto and aero. companies, and indorsed by the British Munitions Board.

SO-LUMINUM MFG. & ENG. CO., Inc
Room 25, 1790 Broadway New York City

A NEW BOOK ON

MAGNETO IGNITION

Its Principles and Applications with special reference to Aviation Engines

By MICH. E. TOEPEL

The instructor United States Government School for the Study of Magneto Ignition.

The first authoritative work on this subject. Arranged as a questionnaire. Freely illustrated. Limp cloth. Handy pocket size. By mail $2.00.

There will be a big demand for this Book and we suggest early receipt of your order for prompt delivery.

SPON & CHAMBERLAIN, Publishers
120 W. Liberty Street, New York

The "Perfect Starter"

Two Models



This starter is idle when not in use and leaves the motor entirely free, so that interference with the engine is impossible. The United States Government and the British, Dutch, Norwegian, and Swedish Governments as well, have tested and approved this device.

Write for Free Booklet

THE MOTOR-COMPRESSOR COMPANY, Newark, N. J., U. S. A.

DUESENBERG

THE POWER OF THE HOUR

DUESENBERG MOTORS CORPORATION
120 BROADWAY, NEW YORK CITY
CONTRACTORS TO THE UNITED STATES GOVERNMENT

Rubber Aero Cord

FOR SHOCK ABSORBERS

Prompt Delivery

THE RUSSELL MANUFACTURING CO.
349 Broadway, New York City
Factories: MIDDLETOWN CONNECTICUT

HULLS FOR FLYING BOATS

PONTOONS FOR SEAPLANES

Palmer-Simpson Corporation
Saranac Lake, N.Y.

AMERICAN PROPELLER & MFG. CO.
TRADE MARK
PARAGON
BALTIMORE MARYLAND U.S.A.

GENERAL DESIGN PLANS AND DETAILED SHOP DRAWINGS

AIRPLANES *and* MOTORS

STANDARD AND SPECIAL MACHINES

AIRCRAFT MOTOR DESIGN AND DEVELOPMENT

PRINTS, PLANS, DRAWINGS, STRESS DIAGRAMS

PROPELLER CALCULATION AND DESIGN

Speedy Economic Manufacturing Processes Devised. Tools and Dies Designed for Fittings, Parts, Aircraft Components, Stream Line Sheet Metal Shapes, Etc.

AERONAUTIC INVENTIONS DEVELOPED

AUTOMOTIVE ENGINEERING COMPANY
Aeronautical Engineers and Constructors
120 SOUTH STATE STREET CHICAGO, ILLINOIS

ROEBLING AIRCRAFT WIRE, STRAND AND CORD

THIMBLES AND FERRULES

JOHN A. ROEBLING'S SONS COMPANY
TRENTON, N. J., U. S. A.

Agencies and Branches:
New York Boston Chicago Philadelphia Pittsburgh Cleveland Atlanta San Francisco Los Angeles Seattle Portland, Ore.

All recognized builders of airplane motors in America use *Zenith* on their product.

Zenith Carburetor Company

New York DETROIT Chicago

PROPELLERS

WA DOYLE
TRENTON NJ

CAPITAL INTERNAL GRINDER **STAMPINGS** JIGS TOOLS DIES

WE realize *in air* or *at sea* there should be *no faulty* material. All machine parts must be made *right* and perform their functions *properly*, hence we have equipped our new plant to turn out work of the highest quality. We offer our facilities to you and trust we may be of service.

Will you give us a trial?

LANSING STAMPING & TOOL CO.

LANSING, MICHIGAN

METAL HOSE

For every Airplane Requirement

Write for specifications and prices

PENNSYLVANIA FLEXIBLE METALLIC TUBING COMPANY

Broad and Race Streets, Philadelphia

New York, Boston, Chicago, Detroit, Cleveland

LEYGRAND & CO.

120 Broadway, New York

MILL AGENTS

ALUMINUM SHEETS

Screw Stock, Rod and Wire

Tycos

Aviation Barometer

Made in U. S. A.

Write for Information

Taylor Instrument Companies

Rochester, N. Y.
U. S. A.

For over sixty years makers of scientific instruments of superiority

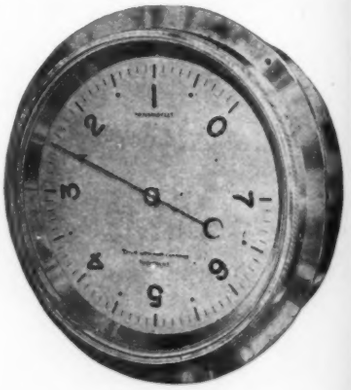

THE BROOKS MACHINE CO.

Designers and Manufacturers of

SPECIAL TOOLS,
GAUGES OF ALL KINDS,
JIGS, FIXTURES *and* PARTS *for*
AIRPLANE ENGINES

YORK, PENNA.

Wisconsin

CONSISTENT

AEROPLANE MOTORS

are correctly designed with the highest quality materials and workmanship.

Write for catalog of 6 and 12 cylinder models.

WISCONSIN MOTOR MFG. CO.

Station A. Dept. 338. Milwaukee, Wis., U. S. A.

BUILT ON HONOR
LIBERTY
HARTZELL WALNUT PROPELLER CO.
PIQUA-OHIO-U.S.A.

New York Office: Times Bldg. Telephone, Bryant 9159

Berling Magneto
insures a hot, fat spark at any altitude
Worth more
Does more

Manufactured by the
Ericsson Mfg. Co.
Buffalo N.Y. U.S.A.

DOEHLER
BABBITT-LINED BRONZE
BEARINGS
have been used for years with the utmost success by the leading motor manufacturers in the automobile and airplane industries.
DOEHLER DIE-CASTING CO.
MAIN OFFICE AND EASTERN PLANT
BROOKLYN, N.Y.
WESTERN PLANT TOLEDO, OHIO.
NEW JERSEY PLANT NEWARK, N.J.
Also Die-Cast Babbitt Bearings, Die-Castings in Brass & Bronze Aluminum and White Metal Alloys

Aeroplane Cylinder Forgings
We make a specialty of hollow forging in dies under our hydraulic presses, aeroplane cylinder forgings of high and low carbon O.H. or alloy steels.
We have furnished cylinder forgings to practically all the engine builders in the United States.
Also Propeller Hubs, Flanges and Shafts, etc
Miscellaneous steam hammer and hydraulic press die forgings of all types.
Quick service our specialty
TIOGA STEEL & IRON COMPANY
52nd & Grays Avenue Philadelphia, Pa., U. S. A.

"Supremacy in the Air the Key to Victory!"
EAGLE AVIATION SCHOOL
WE ARE THE PIONEER AVIATION SCHOOL
DO YOUR BEST BIT
Train yourself for the Aviation Service by taking advantage of
The Preparatory Ground Course in Aviation Mechanics
Affording preparation prior to entering Government Ground School, covering aero-dynamics, aero-engines, rigging and Lewis gunnery. Previous experience unnecessary.
Complete Course taken in six weeks (three hours daily) or three weeks (six hours daily) $60
Special Aero-Engine Course (three weeks) $35
Write for our Illustrated Booklet "F"—"A Message to You on Aviation"
110-114 West 42d Street Telephone Bryant 9078 New York

AIRCRAFT STANDARD CORPORATION
ELIZABETH NEW JERSEY
A REAL FIGHTING INDUSTRY
Member Manufacturers' Aircraft Association, Inc.

Classified Advertising

10 cents a word, minimum charge $2.00, payable in advance. Address replies to advertisements with box numbers, care of AVIATION AND AERONAUTICAL ENGINEERING, 120 West 32d Street, New York.

FOR SALE—Two Model "O" Curtiss and "80" eight-cylinder aviation motors complete with blades, tanks and radiators. These motors practcally new. Priced right for cash. Address C. C. Sidnam, P. O. Box 275 Anaheim, Cal.

FOR SALE—Suitable for Aviation Motors—2 NEW 100 Horse Power, 6 Cylinder Engines. Will sell REASONABLE. Address J. Straus, 203 Centre St., New York City.

THE SERVICES of an expert in the theory and design of airplanes, propellers and motors are available for the summer months. Address Box 74.

ENGINEER-EXECUTIVE, now holding important government position, would like to hear from first-class aerial engine manufacturer. Designing, production, inspection. Available about August first. Confidential correspondence invited. Address Box 21.

FOR SALE: Slightly used Curtiss flying boat, equipped with a 90 h. p. Curtiss OX motor in perfect condition. One model OXX and two model OX Curtiss motors at reasonable prices. Michigan Aircraft Company, Grand Rapids, Mich.

INDEX TO ADVERTISERS

A

Ackerman Wheel Co. 620
Ajax Auto & Aero Sheet Metal Co. 626
Aluminum Co. of America 624
American Bronze Corp. 583
American Lead Pencil Co. 615
American Propeller & Manufacturing Co. 635
Automotive Engineering Co. 635

B

Banta, Geo., Publishing Co. 624
Barcalo Mfg. Co. 625
Betz-Pierce Co., The 582
Blum, Julius, & Co. 634
Boeing Airplane Co. 574
Boston Auto Gage Co. 626
Brock, Arthur, Jr. 634
Brooklyn Varnish Mfg. Co. 621
Brooks Machine Co. 636
Burgess Co., The 572

C

Chemical Products Co. 632
Christensen Engineering Co. 632
Cold Light Manufacturing Co. 627
Continental Aircraft Corp. 616
Curtiss Aeroplane & Motor Corp. 604-605

D

Dalton Manufacturing Corp. 628
Dayton Metal Products Co. 614
Defiance Machine Works. 628
Dewey Airplane Co. 630
Doehler Die Casting Co. 637
Doyle, W. A. 636
Duesenberg Motors Corp. 635
Dupont American Industries. 585

E

Eagle Aviation School. 637
Ericsson Manufacturing Co. 637
Erie Specialty Co. 577

F

Fahrig Metal Co. 623
Flexo Manufacturing Co. 626
Foxboro, The, Co. 633
Fox Machine Co. 628

G

Gillette Safety Razor Co. 587
Gurney Ball-Bearing Co. 639

H

Hall-Scott Motor Car Co. 571
Hamilton Watch Co. 622
Hammacher, Schlemmer & Co. 618
Hartzell Walnut Propeller Co. 636
Haustetter, A. 632
Hendee Manufacturing Co. 630
Howe Varnish Co. 618

J

Jamestown Propeller Co. 622
Jacuzzi Bros. 627
Johns-Manville, H. W., Co. 629

K

Kawneer Mfg. Co. 640

L

L. W. F. Engineering Co. 573
Lansing Stamping & Tool Co. 636
Lanzius Aircraft Co. 616
Levett, Walker M., Co. 586
Leygrand & Co. 636
Loening, Grover C. 632

M

Martin, Glenn L., Co. 570
Mattison, C., Machine Works. 628
Metal Products Co. 633
Moto-Meter Co. 576
Motor-Compressor Co. 635
Mott Wheel Works. 633
Multiple Storage Battery Co. 578

N

New Departure Mfg. Co. 590

O

Ordnance Engineering Co. 634

P

Palmer-Simpson Co. 635
Park Drop Forge Co. 621
Penn. Flexible Metallic Tubing Co. 636
Pryibil, P., Machine Co. 619

R

Radium Dial Co. 620
Radium Luminous Material Corp. 623
Roebling's, John A., Sons Co. 635
Rome-Turney Radiator Co. 626
Russell Manufacturing Co. 635

S

Sherwin-Williams Co. 579
Scheuerman & Co. 634
So-Luminum Mfg. & Eng. Co. 634
Sperry Gyroscope Co. 589
Spon & Chamberlain. 635
Spranger Wire Wheel Corp. 630
Standard Aircraft Corp. 637
Standard Turnbuckle Co. 631
Steel Products Co. 581
Stimpson, Edwin B., Co. 633
Strauss & Buegeleisen. 588
Sturtevant, B. F., Co. 575

T

Taylor Instrument Companies. 636
Thomas-Morse Aircraft Corp. 617
Tioga Steel & Iron Co. 637

U

Union Gas Engine Co. 580

V

Valentine & Co. 613

W

West Woodworking Co. 630
White, J. G., The, Engineering Corp. 584
Whitman & Barnes Manufacturing Co. 633
Widman, J. C., & Co. 619
Wisconsin Motor Manufacturing Co. 636
Witteman-Lewis Aircraft Co. 616
Wood, J. W., Elastic Web Co. 631
Wyman-Gordon Co. 588

Y

Yale-Towne Mfg. Co. 629

Z

Zenith Carburetor Co. 636

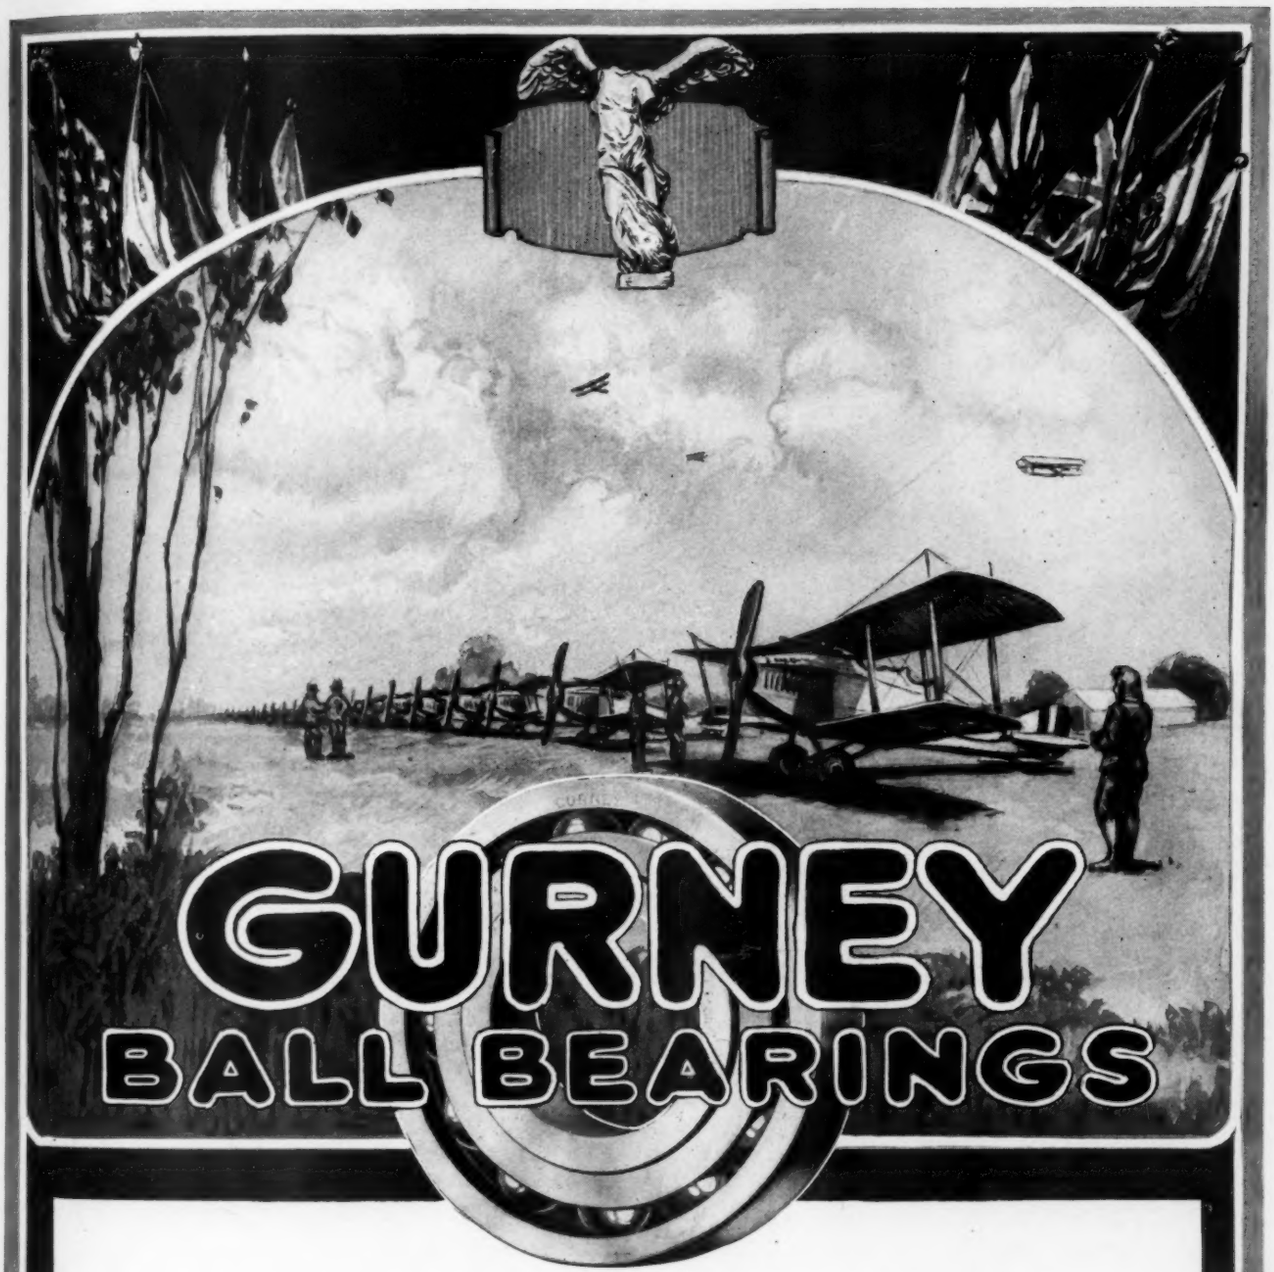

The Success of the Allied Air Fleets Depends Upon Safe Ball Bearings

The Ball Bearings for aeroplane requirements must take combination of both radial and thrust loads to be most efficient.

Gurney Ball Bearings answer **all** aeroplane requirements

Gurney Ball Bearings carry both radial and thrust loads on a single row of balls.

This means one bearing in place of two without reducing the factor of safety.

Write us for Particulars

Gurney Ball Bearing Co.

Conrad Patent Licensee

234 **Jamestown** **N. Y.**

Kawneer
AIRPLANE PARTS

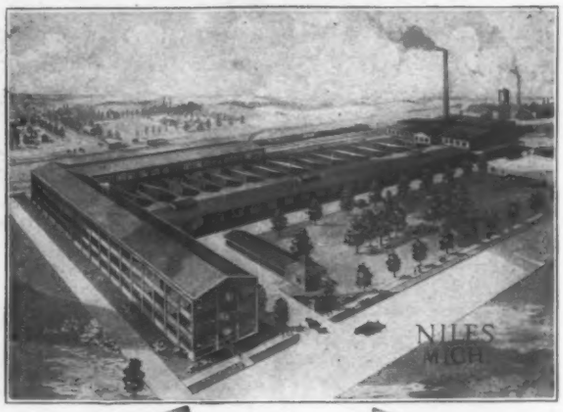

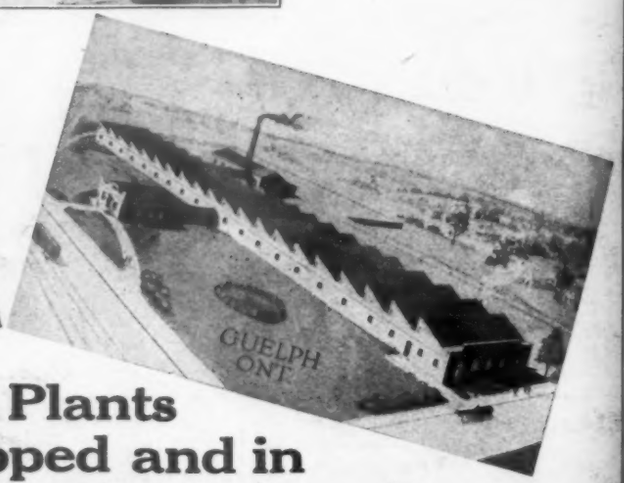

Metal Plants Fully Equipped and in Big Production on Steel Airplane Parts

We are supplying the entire steel parts requirements of the largest aircraft producers in the United States and Canada, as follows: **Trailing Edge** for **Ailerons, Engine Panel and Wing Sections,** (using a special Kawneer open construction, completely fabricated with clips), also a special Kawneer open construction for **Elevators, Vertical and Horizontal Stabilizers, and Rudders** (this construction is adaptable to either wood or all-steel units.)

Our new construction for Tail Strut Braces and Fusilage Braces for the JN-4 types has the approval of the United States Government and the larger machine builders.

Besides the open edge construction now adopted as standard for the JN-4 types, **we also are in full production on the oval or round construction** specified for DH-4 types. **Also All-Steel Rudders, Elevators, Stabilizers, Fins, Steel Stream Line Tubing, Fusilage Parts, tested and approved sections and designs.**

Anything required in special shapes, can be supplied promptly. Because of our large facilities for handling this class of work, we can for the present assure aircraft manufacturers prompt shipments on any of their special steel requirements.

KAWNEER MFG. COMPANY

Guelph, Ont. **NILES, MICHIGAN** **Berkeley, Cal.**